

ASSEMBLY&INSTALLATION

Please read carefully and save these instructions,as you may need them a later date.

CAUTION

Turn off the main power at the circuit breaker before installing the fixture, in order to prevent possible shock.

GENERAL


All electrical connections must be in accordance with local and National Electrical Code(N.E.C) standards. If you are unfamiliar with proper electrical wiring connections obtain the services of a qualified electrician.

Remove the fixture and the mounting package from the box and make sure that no parts are missing by referencing the illustrations on the installation instructions.

ASSEMBLY AND INSTALLATION

1. Carefully unpack the fixture, lay out all parts on a clean surface.
2. Unscrew hex nut (12), remove lock washer (14), safety cable (15), flat plate (13) and swivel (19) from canopy (11).
3. Connect the stems (22)(21) (20) (depending on desired height). Attach them to the couplings on the top of the fixture (23). Secure swivel (19) to the top of the stem (20).
4. Place canopy (11), flat plate (13), safety cable (15) and lock washer (14) over the swivel (19), secure with the hex nut (12). Make sure two swivels (19) are in same front or back side of fixture.
5. Attach mounting bar (1) to outlet box (2) using two outlet box screws (3).
6. Hook safety cable (15) to mounting bar (1) to hold the fixture (23).
7. Carefully feed the fixture wires through the canopy (11) ,flat plate (13), lock washer (14), and hex nut (12), then into outlet box (2).
8. Pull out the outlet wire and ground wire from the outlet box, make wire connections with wire nuts (10) as follow:
 - Connect the smooth-coated wire (w marking) or Black wire (8) from fixture to the Black wire (5) from power source.
 - Connect the ribbed-coated wire (w/o marking) or White wire (9) from fixture to the White wire (6) from power source.
 - Attach the fixture ground wire (7) to mounting plate (1) with the ground screw (16). Connect it to the house ground wire (4) with the wire nut (10). Position wires back inside outlet box (12).
9. Place canopy (11) against the ceiling, ensuring nipple (17) is protruding through the hole in canopy (11). Secure the fixture in place to nipple (17) with nut (12) and ball nut (18).
10. Install the bulbs (not included). Make sure they do not exceed the maximum wattage specified on the fixture's wattage rating label.
11. Turn on the power.

INSTALLATION IS NOW COMPLETED

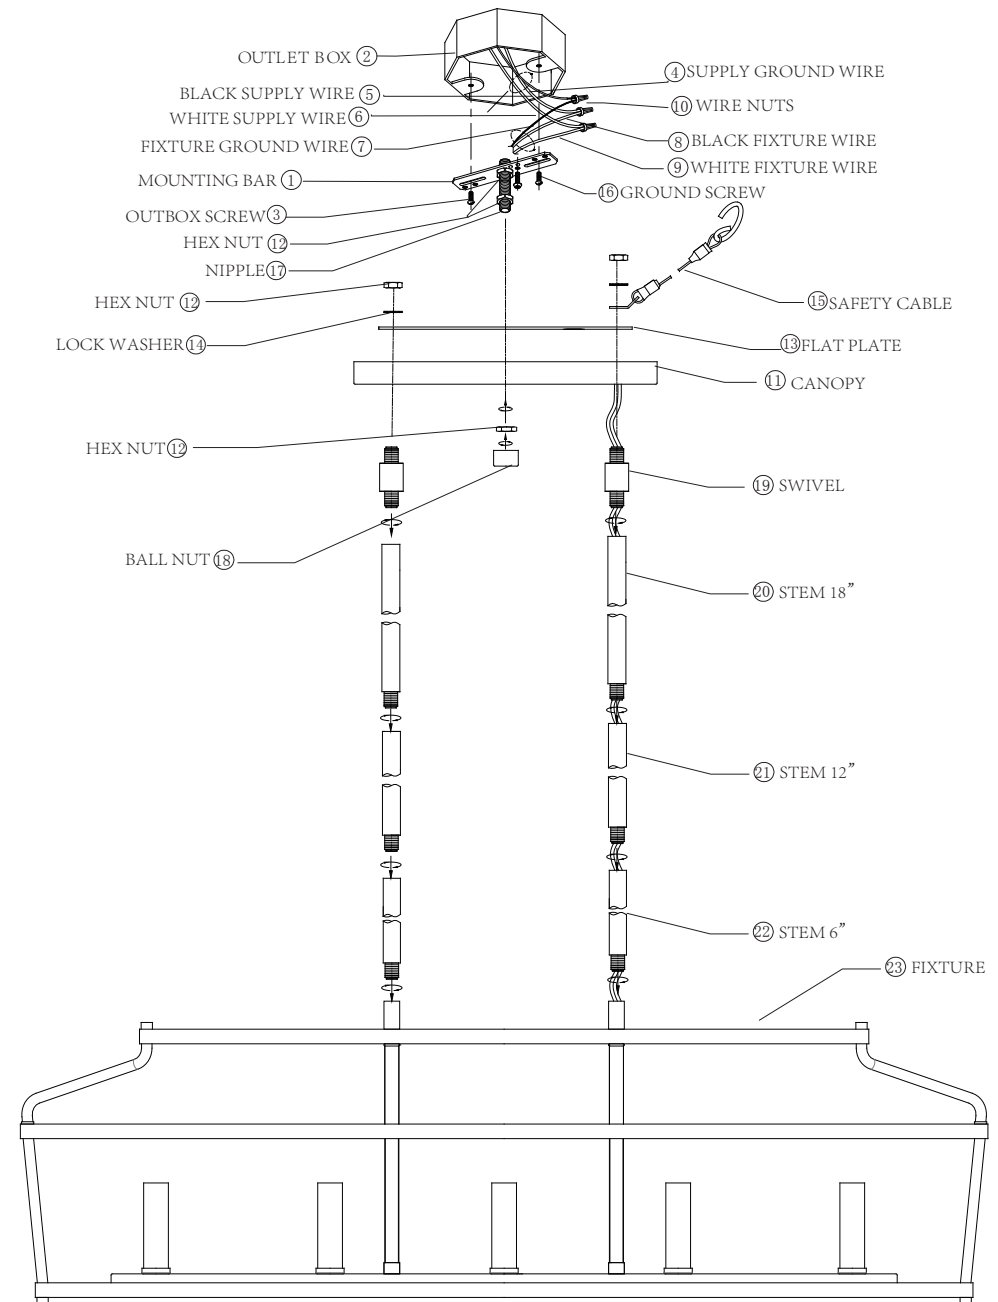

ITEM NO.: 19105