

Rev. 4-14 Shaded area indicates changes

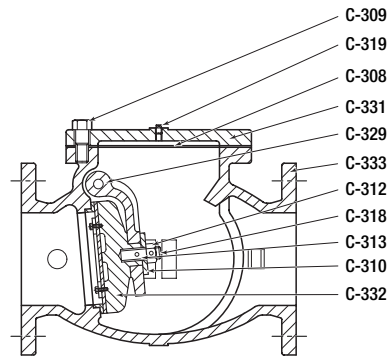
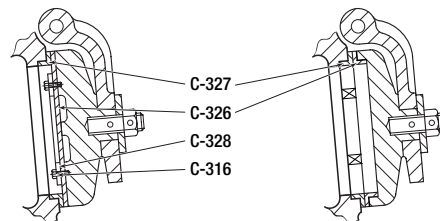
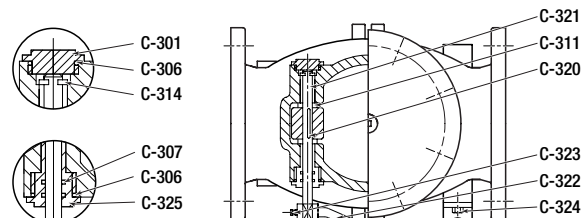

- ☐ Catalog number---
A-2600-6-02BB flanged ends, with bronze disc facing
A-2602-6-02B1 flanged ends, with rubber disc facing
- ☐ Sizes---2", 2-1/2", 3", 4", 6", 8", 10", 12"
- ☐ Meets all applicable parts of ANSI/AWWA C508 Standard
- ☐ Epoxy coated interior & exterior for corrosion resistance
- ☐ Certified to ANSI/NSF 61
- ☐ Flanged end dimensions and drilling comply with ANSI B16.1, class 125
- ☐ Iron body, bronze mounted (IBBM)
- ☐ Choice of bronze or rubber disc facing
- ☐ For vertical or horizontal installation
- ☐ O-ring sealed stuffing box
- ☐ Adjustable spring tension to control opening and closing of clapper, lever and spring can be installed on either side of valve
- ☐ 200 psig (1400 kPa/14 barg) maximum working pressure, 400 psig (2800 kPa/28 barg) test pressure

**A-2600-6-02BB****Options**

- ☐ PN 10/PN 16 Flange Drilling 4"-12"
- ☐ Stainless Steel Nuts & Bolts
- ☐ Tapped Bosses
- ☐ Allen Bradley Limit Switch

Check Valve Parts (2011-present)

Catalog Part No.	Description	Material	Material Standard
C-301	Retaining Plug	Brass	ANSI B21
C-302	Stud Nut & Nut	Zinc Coated Steel	ASTM A307 Grade B
C-303	Arm B	Zinc Coated Steel	ASTM A36
C-306	O-ring C	Rubber	ASTM D2000, BK 707
C-307	O-ring B	Rubber	ASTM D2000, BK 707
C-308	Gasket	Rubber	ASTM D2000, BK 807
C-309	Cover Bolt	Zinc Coated Steel	ASTM A307 Grade B
C-310	Washer	Brass	ANSI B21
C-311	Spacer	Brass	ANSI B21
C-312	Disc Nut	Brass	ANSI B21
C-313	Disc Stud	Brass	ANSI B21
C-314	Snap Ring	Stainless Steel	ASTM A276 Type 420
C-317	Spring	Zinc Coated Steel	ASTM A307 Grade B
C-318	Pin	Stainless Steel	ASTM A276 Type 304
C-319	Test Plug	Malleable Iron	ASTM A47
C-320	Key	Stainless Steel	ASTM A276 Type 304
C-321	Hinge Pin	Stainless Steel	ASTM A276 Type 304
C-322	Weight Arm	Ductile Iron	ASTM A536 ▼
C-323	Bolt & Nut	Zinc Coated Steel	ASTM A307 Grade B
C-324	Bolt	Zinc Coated Steel	ASTM A307 Grade B
C-325	Seat Nut	Brass	ANSI B21
C-327	Body Seat Ring	Bronze	ANSI B62
C-329	Arm	Ductile Iron	ASTM A536 ▼
C-331	Cover	Cast Iron	ASTM A126 Cl. B
C-332	Disc	Cast Iron	ASTM A126 Cl. B
C-333	Body	Cast Iron	ASTM A126 Cl. B
Rubber Faced Disc Parts			
C-316	Disc Seat Bolt	Stainless Steel	ASTM A276 Type 304
C-326	Disc Seat Ring	Rubber	ASTM D2000, BK 807
C-328	Seat Holder	Cast Iron*	ASTM A126 Cl. B
Bronze Faced Disc Parts			
C-326	Disc Seat Ring	Bronze	ANSI B62

**Valve body and clapper
 Rubber faced disc shown****Rubber faced disc clapper****Bronze faced disc clapper****Hinge pin
 and stuffing box****Spring lever assembly**

*2"- 6" sizes are cast iron, ASTM A126 Cl. B, 8"- 12" sizes are ductile iron ASTM A536

▼ Material strength ASTM A536 65-45-12 minimum