


Specialty Products™


SWITCH HITTER® OUTLET BOX WITH SIMPLEX™ VALVE

Specification Sheet

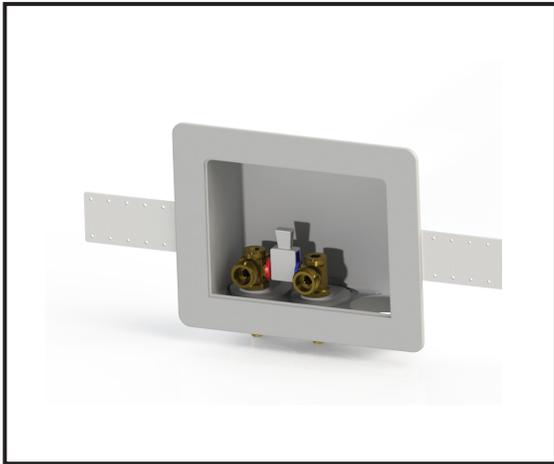


DIMENSIONS


Front View

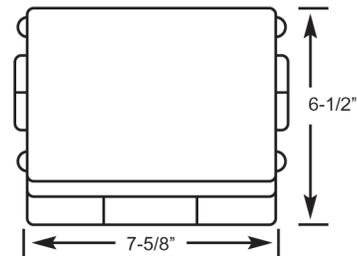

Face Plate

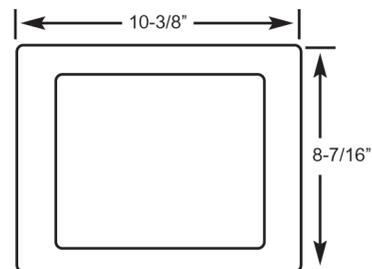

Bottom View

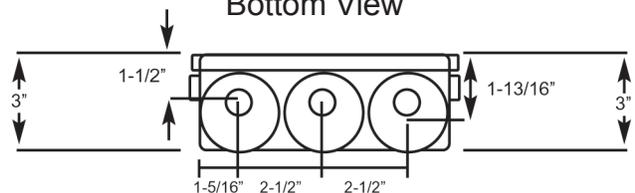

SPECIFICATION

Furnish and install Switch Hitter® outlet box as manufactured by LSP Products Group.

DESIGN FEATURES

- Patented box design provides left, center and right waste options.
- Box knockouts accept either waste or water lines.
- Easy to install adjustable faceplate accommodates up to 5/8" wall thickness.
- Unique single lever design controls both hot and cold water with one movement.
- Mounting brackets included

COMPLIANCES/LISTINGS

- IAPMO File #0901
- ASME A112.18.1 Standard
- NSF Standard 61
- CSA Certified



3689 Arrowhead Drive, Carson City, NV 89706

Phone (800) 854-3215 Fax (800) 243-1777

E-mail sales@lspproducts.com Website www.lspproducts.com

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained.
SP/SHSV (04-11) Rev 1

| Product Submittal | |
|-------------------|----------|
| Job Name: | |
| Date: | |
| Part Number | Quantity |
| | |
| | |
| Architect: | |
| Contractor: | |

| Part Number | Color | Description |
|---|-------|----------------------|
| WITH M.I.P VALVES | | |
| OB-400 | Beige | Unassembled |
| OB-402 | Beige | Left Outlet |
| OB-404 | Beige | Right Outlet |
| OB-401 | White | Unassembled |
| OB-403 | White | Left Outlet |
| OB-405 | White | Right Outlet |
| WITH CPVC VALVES | | |
| OB-429 | White | Unassembled |
| WITH PEX VALVES (Fits Vanguard and Zurn) | | |
| OB-435 | White | Unassembled |
| OB-437 | White | Left Outlet |
| OB-439 | White | Right Outlet |
| ACCESSORIES / REPLACEMENT PARTS | | |
| P-06290 | Brass | Simplex M.I.P. Valve |
| P-06322 | Brass | Simplex CPVC Valve |
| P-06321 | Brass | Simplex PEX Valve |
| OB-900 | Beige | Face Plate |
| OB-901 | White | Face Plate |
| OB-903 | White | Deep Face Plate |

Add "-T" to the end of the part number for Tract Pack (faceplates packaged separately)

INSTALLATION INSTRUCTIONS

1. Position box between studs to desired height.
2. Secure box to a backing board with screws or nail bracket(s) on box to front of stud(s). In both cases the front edge of the box should be flush with wall material.
3. Cut or punch opening in bottom box if necessary for 2" plastic drain pipe Solvent cement pipe to bottom of box.
4. When installing valves follow your local codes.
5. Install face plate by pushing plate into box until plate is flush against the wall material.



3689 Arrowhead Drive, Carson City, NV 89706

Phone (800) 854-3215 Fax (800) 243-1777

E-mail sales@lspproducts.com Website www.lspproducts.com

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained.
SP/SHSV (04-11) Rev 1

| Product Submittal | |
|-------------------|----------|
| Job Name: | |
| Date: | |
| Part Number | Quantity |
| | |
| | |
| | |
| Architect: | |
| Contractor: | |