


SILENT CHECK VALVES 1400*

WAFER STYLE • CAST IRON BODY

125 LB. CLASS • BRONZE TRIM**

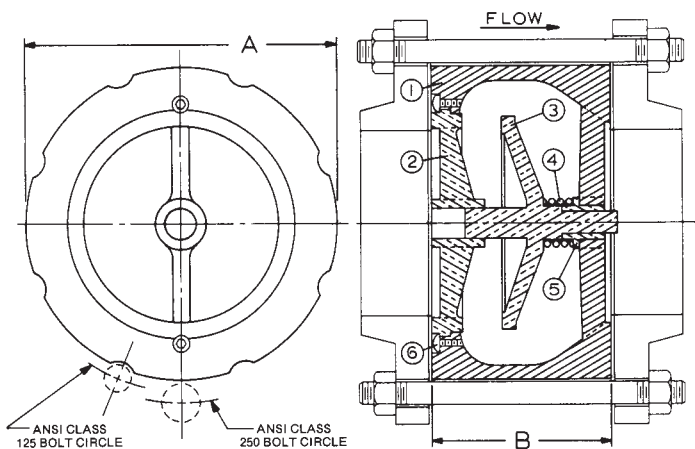

MATERIAL LIST

NO.	PART	MATERIAL
1	Body	Cast Iron
2	Seat	Bronze
3	Plug	Bronze
4	Spring	Stainless Steel
5	Bushing	Bronze
6	Screw	Stainless Steel

DIMENSIONS - INCHES / MILLIMETERS

Units	Size	Weight Lbs.	A	B	C _v
Inches	2	6	4.25	2.63	66
mm	50.8		108.0	66.7	
Inches	2 1/2	7	5.00	2.88	88
mm	63.5		127.0	73.0	
Inches	3	12	5.75	3.13	130
mm	76.2		146.1	79.4	
Inches	4	18	7.00	4.00	228
mm	101.6		177.8	101.6	
Inches	5	27	8.38	4.63	350
mm	127.0		212.7	117.6	
Inches	6	42	9.75	5.50	520
mm	152.4		247.7	139.7	
Inches	8	85	13.38	6.50	900
mm	203.2		339.7	165.1	
Inches	10	146	16.00	8.25	1450
mm	254.0		406.4	209.6	

PRESSURE TEMPERATURE RATINGS				
TEMP. DEG. F.	MAX., NON-SHOCK SERVICE PRESS.			
	ANSI B16.1 FLG. RATINGS			
	125 LB CLASS		250 LB CLASS	
	2" - 12"	14" - 42"	2" - 12"	11" - 42"
0° - 150°	200	150	400	300
200°	190	135	370	280
TEST PRESSURE	300	230	600	450

DIMENSIONS - INCHES / MILLIMETERS

Units	Size	Weight Lbs.	A	B	CV
Inches	8	86	13.38	6.50	900
mm	203.2		339.7	165.1	
Inches	10.00	137	16.00	8.25	1450
mm	254.0		406.4	209.6	

SIZES 2" THRU 6" ARE COMBINATION ANSI CLASS
125 AND 250, VALVES USE ANSI CLASS 125

* International Valve

**We reserve the right to substitute stainless steel trim.

NOTE: Stainless Steel trim recommended for temperatures 180° - 200° F.

Valve is designed for liquid service only. Install 5 to 10 pipe diameters downstream from pump discharge or elbows to avoid flow turbulence. Valve is designed to be mated to standard steel flanges.

Rev. 8

INNOVATION IN EVERY VALVE



MILWAUKEE VALVE

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the Installation, Operation and Maintenance Manual (IOM) see the engineering section on our website. For the most current information access www.milwaukeevalve.com

www.milwaukeevalve.com