



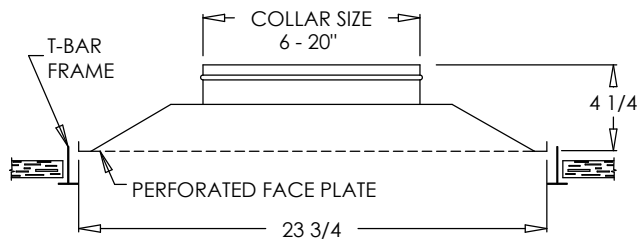

830 Series Perforated Return T-Bar

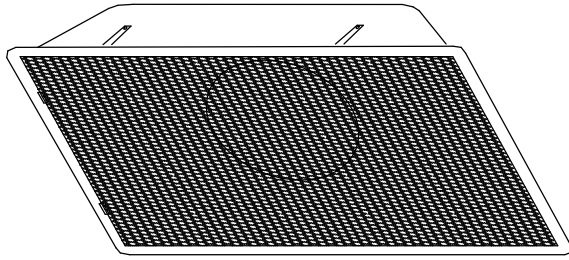


830

Standard:

- T-Bar lay in panel with hinged perforated face
- Spring push release for removal of perforated face
- Galvaneal steel 2x2 panel with seismic support holes
- Round No Labor Collar sizes 6, 7, 8, 9, 10, 12, 14, 16, 18 & 20"
- Soft White

Optional:

- ☐ Field installable Bowtie Damper on sizes 6-14" (BD)
- ☐ Factory installed Opposed Radial Damper sizes 6"-14" (830 OR)
- ☐ Square collar
- ☐ TVB - Thermal Vapor Blanket: 1" thick 2 x 2 foil faced self adhesive insulation blanket
- ☐ Steel opposed blade damper available on square collar (830 O)

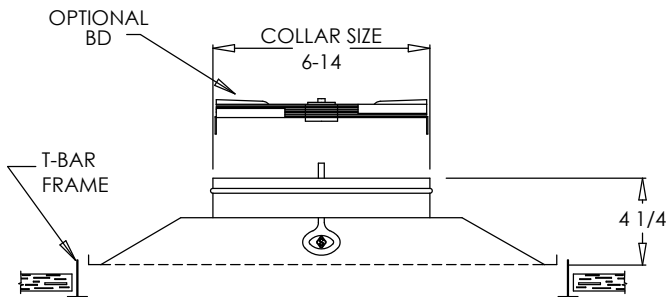


830 BD

BD

Open



Closed



PROJECT	SUBMITTAL REVIEW
LOCATION	
ENGINEER	
ARCHITECT	
CONTRACTOR	