


AQUAFLO[®] MIGHTYFLEX[™] Stainless Steel Connectors

Superior Corrosion Resistance



Stainless steel braiding and reinforced PVC liner provide superior performance.

Extraordinary Protection Against Leaks




Exclusive 12-point crimp provides stronger burst protection than 4, 6, or 8 point crimps

Outstanding Strength And Flexibility



Aqua-Flo hoses offer unparalleled strength, flexibility, and peace of mind

All braided connectors are not created equal...

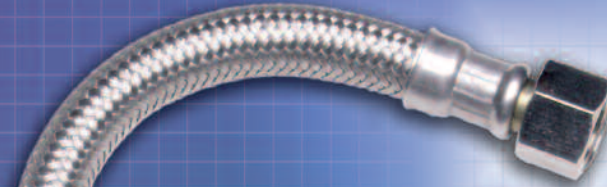

Aqua-Flo connectors provide superior protection against corrosion, leaks and fraying.

Rely on AQUAFLO[®] for all your connector needs:

- Faucet
- Toilet
- Dishwasher
- Icemaker
- Washing Machine
- Water Heater



LSP[®]
PRODUCTS GROUP
www.lspproducts.com

The Innovation Leader to the Plumbing Industry

Phone: (800) 854-3215 Fax: (800) 243-1777

- Highest Quality
- Outstanding Performance
- Exceptional Service

AQUAFLO® MIGHTYFLEX STAINLESS STEEL CONNECTORS

DESIGN FEATURES

- Chloramine resistant soft cone
- Exclusive POWER-TIGHT 12-point crimp-many times industry standard
- Chloramine resistant tubing
- Withstands dramatic changes in water pressure
- Easy installation, no special tools required

Part Number	Description	Length
SFC-109-PP		9"
SFC-112-PP		12"
SFC-116-PP		16"
SFC-120-PP	1/2" FIP Soft Cone	20"
SFC-124-PP	x	24"
SFC-130-PP	3/8" Soft Compression	30"
SFC-136-PP		36"
SFC-148-PP		48"
SFC-312-PP		12"
SFC-316-PP	1/2" FIP Soft Cone	16"
SFC-320-PP	x	20"
SFC-324-PP	1/2" Compression	24"
SFC-330-PP	Soft Cone	30"
SFC-348-PP		48"
SFC-409-PP		9"
SFC-412-PP		12"
SFC-416-PP		16"
SFC-420-PP	1/2" FIP Soft Cone	20"
SFC-424-PP	x	24"
SFC-430-PP	1/2" FIP Soft Cone	30"
SFC-436-PP		36"
SFC-448-PP		48"
SFC-506-PP		6"
SFC-509-PP		9"
SFC-512-PP		12"
SFC-516-PP	3/8" Soft Compression	16"
SFC-520-PP	x	20"
SFC-524-PP	3/8" Soft Compression	24"
SFC-530-PP		30"
SFC-548-PP		48"
SFC-572-PP		72"
SFF-112-PP		12"
SFF-116-PP	1/2" FIP Soft Cone	16"
SFF-120-PP	x	20"
SFF-130-PP	3/8" Flare	30"
SFF-312-PP		12"
SFF-316-PP	1/2" FIP Soft Cone	16"
SFF-320-PP	x	20"
SFF-330-PP	1/2" Flare	30"

TECHNICAL SPECIFICATIONS TABLE

MATERIAL SPEC.



Working Pressure	160 psi maximum
Operating Temperature	33° F - 140° F
Tubing	Reinforced PVC
Nuts & End Fittings	Nickel Plated Brass
Washer	NSF 61 Compliant

COMPLIANCES/LISTINGS

IAPMO Certified
NSF Standard 61-Compliant
ASME A112.18.6



Part Number	Description	Length
SFT-109-PP		9"
SFT-112-PP	7/8" Soft Cone Ballcock	12"
SFT-116-PP	x	16"
SFT-120-PP	3/8" Flare	20"
SFT-309-PP		9"
SFT-312-PP	7/8" Soft Cone Ballcock	12"
SFT-316-PP	x	16"
SFT-320-PP	1/2" Flare	20"
SWC-106-PP		6"
SWC-109-PP	7/8" Soft Cone Ballcock	9"
SWC-112-PP	x	12"
SWC-116-PP	3/8" Soft Compression	16"
SWC-120-PP		20"
SWC-306-PP		6"
SWC-309-PP	7/8" Soft Cone Ballcock	9"
SWC-312-PP	x	12"
SWC-316-PP	1/2" Compression Soft	16"
SWC-320-PP	Cone	20"
SWC-406-PP		6"
SWC-409-PP	7/8" Soft Cone Ballcock	9"
SWC-412-PP	x	12"
SWC-416-PP	1/2" FIP Soft Cone	16"
SWC-420-PP		20"

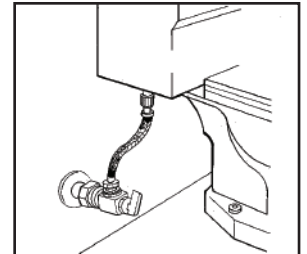

LSP®
PRODUCTS GROUP

Specialty Products • Tech Specialties
• Aqua-Flo • Rapid-Fit

3689 Arrowhead Drive, Carson City, NV 89706

www.lspproducts.com

Phone: (800) 854-3215 Fax: (800) 243-1777

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained.