

Reston

Two-Piece Elongated Toilet with Flush Guard™ Overflow Protection



Product Features

- Equipped with Flush Guard™ overflow protection
- 1.28 gpf
- Gravity-fed siphon jet flush
- Vitreous china
- 17" Elongated ADA bowl
- Rough-in: 12"
- Flush Valve: 3"
- Trapway: 2" Fully glazed
- Water Spot: 8-5/8" x 6"
- Front-mounted chrome trip lever with brass arm
- Sanitary bar on bowl for easy cleaning
- Quick connect, two-bolt tank-to-bowl installation
- Extra large footprint covers floor marks

Optional Accessories/Available Parts


- PF2412FLPK** Fill Valve Assembly
PF9412FVPK Flush Valve Assembly
PF5112TLCPPK Chrome Flush Lever

Codes and Certifications



- IAPMO/cUPC
- EPA WaterSense Certified
- ASME A112.19.2 / CSA B45.1
- MaP Rated 1000g
- ADA Compliant

FLÜSH GUARD™ ANTI-OVERFLOW TOILETS



Available Colors: White (WH)

Tank

- | | |
|------------------|-------------------------------------|
| PF2412WH | 12" Rough-in tank with Chrome Lever |
| PF2412RWH | 12" Rough-in Right-Hand Tank |


Bowl

- | | |
|-----------------|--------------------------|
| PF2403WH | Elongated ADA Bowl - 17" |
|-----------------|--------------------------|


This product comes complete with installation, operating, care and maintenance instructions. All PROFLO fixtures carry a lifetime limited warranty on the vitreous china and a 5-year limited warranty on the fittings. Visit [ferguson.com/PROFLO-vitreous-china-warranty](https://www.ferguson.com/PROFLO-vitreous-china-warranty) for detailed warranty information.

Reston

Two-Piece Elongated Toilet with Flush Guard™ Overflow Protection

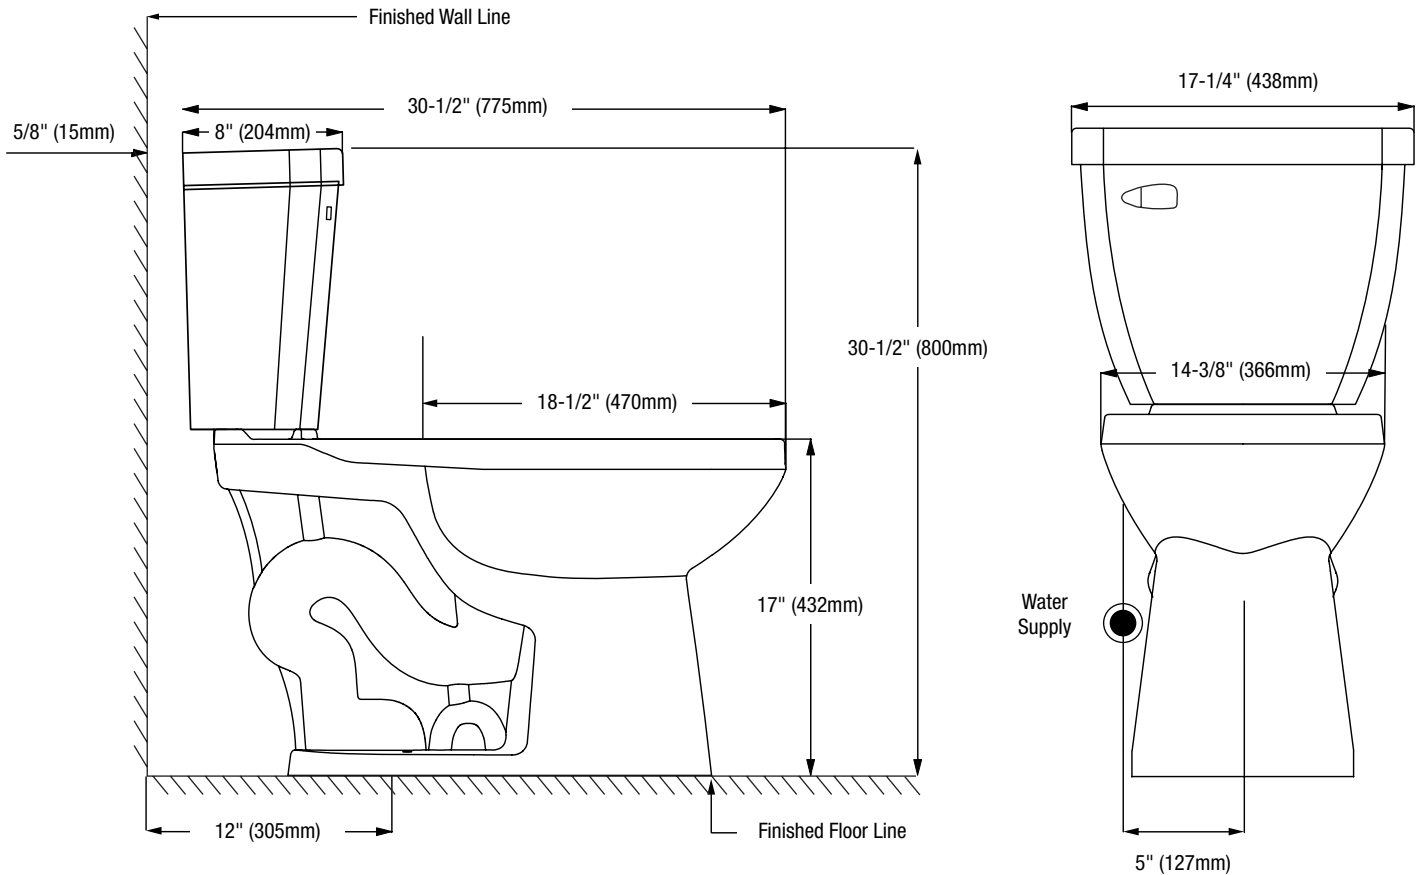

Bowl Footprint Dimensions

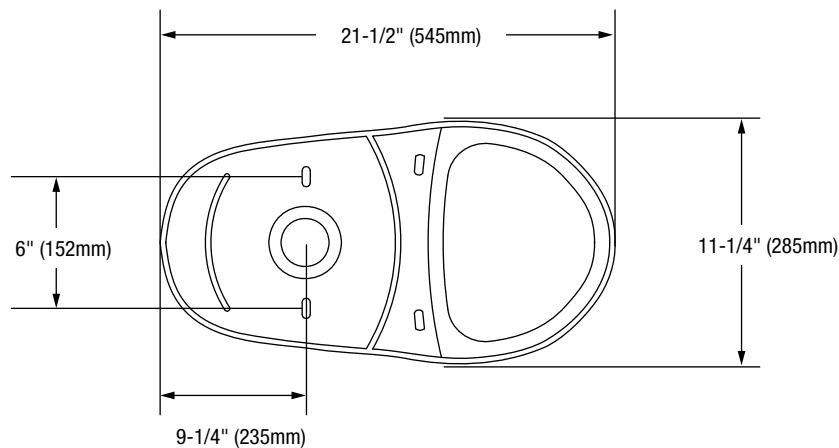

Note: All dimensions and specifications are nominal and may vary: Dimensions of 8" and greater have a tolerance of +3%. Dimensions less than 8" have a tolerance of +5%.