

## Tech Data

# Viega ProPress® Zero Lead Swing Check Valve, Model 2974.2ZL



### Description

Viega ProPress Swing Check valve is a swing-style check valve with a zero lead brass body and ProPress press ends. The valve features EPDM sealing elements and

Viega's Smart Connect® technology for easy identification of unpressed connections during pressure testing.

### Features

- PTFE gasket
- Swing-style check
- EPDM sealing element
- ProPress connections
- Smart Connect technology

### Ratings

- Temperature Range: 0°F - 250°F
- Max. Operating Pressure: 300 psi

### Approvals

- ESL-1443
- NSF®-61-372
- NSF®-U.P. Code



This document is subject to updates. For the most current Viega technical literature, please visit [www.viega.us](http://www.viega.us).




Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**



Zero Lead identifies Viega products meeting the lead free requirements of NSF/ANSI/CAN 61 through testing under NSF/ANSI/CAN 372 (0.25% or less maximum weighted average lead content).

Component	Material
Body	Zero Lead Brass CB770S
Cap	Brass CW511L
Hanger	Brass CW511L
Pin	Brass CW509L
Seat Shutter	PTFE
Seat Cap	PTFE
Nut	316 Stainless Steel
Screw-In Piece	CC246E
Sealing Element	EPDM

## Viega ProPress Swing Check Valve Zero Lead - Model 2974.2ZL

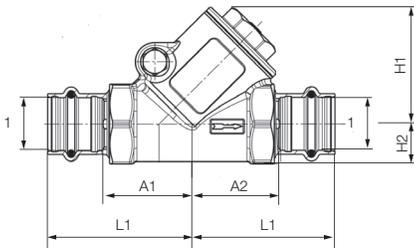

Part No.	Size (in)	H1 (in)	H2 (in)	L1 (in)	A1 (in)	A2 (in)	Cv (US gal/min)
	<b>1</b>						
87170	1/2	1.65	0.55	2.05	0.47	1.22	5.6
87175	3/4	1.97	0.67	2.40	0.55	1.50	9.6
87180	1	2.24	0.83	2.72	0.75	1.81	17
87185	1 1/4	2.72	0.98	3.03	0.91	2.01	28.2
87190	1 1/2	3.15	1.14	3.62	1.02	2.20	44
87195	2	3.86	1.38	4.21	1.30	2.64	82.3



**Viega LLC**

585 Interlocken Blvd.  
Broomfield, CO 80021

Phone (800) 976-9819  
[www.viega.us](http://www.viega.us)

TD-PP 0424 ProPress Swing Check Valve 2974-2ZL

**viega**