

Tech Data

Viega ProPress® Strainer Valve Model 2981.1ZL



Description

Viega ProPress strainer valve has a zero lead brass body, stainless-steel mesh, and ProPress press ends. The valve features an EPDM

sealing element and Viega's Smart Connect® Technology for easy identification of unpressed connections during pressure testing.

Features

- PTFE gasket
- EPDM sealing element
- ProPress connections
- Smart Connect technology

Accessories

- Replacement 100 mesh Model 2981.11

Ratings

- Temperature range: 0°F to 250°F
- Max. operating pressure: 300 psi

Approvals

- NSF®-61
- NSF®-372



This document is subject to updates. For the most current Viega technical literature, please visit www.viega.us.




Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non-professionals may void Viega LLC's warranty.**



Zero Lead identifies Viega products meeting the lead free requirements of NSF/ANSI/CAN 61 through testing under NSF/ANSI/CAN 372 (0.25% or less maximum weighted average lead content).

Component	Material
Body	Zero Lead brass CW511L
Cap gasket	PTFE
Mesh	Stainless steel
Cap	316 stainless steel
Screw-in piece	CC246E
Sealing element	EPDM

Viega ProPress Strainer Valve Model 2981.1ZL

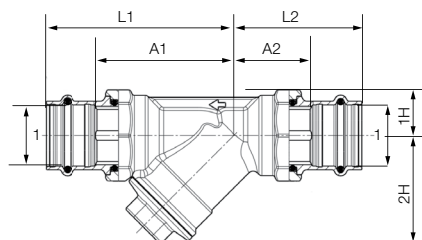

Part No.	Size (in)	H1 (in)	H2 (in)	L1 (in)	L2 (in)	A1 (in)	A2 (in)	Cv (US gal/min)
	1							
87230	1/2	0.59	1.58	2.76	1.73	1.93	0.91	3.1
87235	3/4	0.71	1.73	3.07	2.24	2.17	1.34	5.1
87240	1	0.87	2.01	3.50	2.40	2.60	1.50	7.9
87245	1 1/4	1.02	2.48	4.06	2.36	3.03	1.34	20.5
87250	1 1/2	1.18	2.84	4.84	2.76	3.43	1.34	29.2
87255	2	1.42	3.11	5.51	3.15	3.94	1.58	40



Viega LLC

585 Interlocken Blvd.
Broomfield, CO 80021

Phone (800) 976-9819
www.viega.us

TD-PP 0525 ProPress Strainer Valve 2981-1ZL

viega