


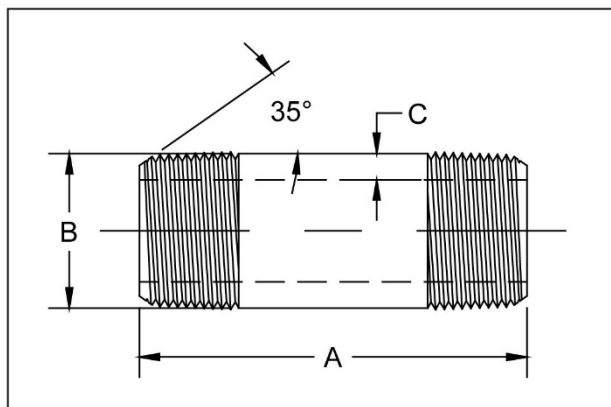

	B	A Length		C Nominal Wall			
Pipe Size	Pipe O.D.	Close	Space	STD.	XH	160	XXH
1/8	0.405	3/4	1 1/2 - 24	0.068	0.095	N/A	N/A
1/4	0.540	7/8	1 1/2 - 24	0.088	0.119	N/A	N/A
3/8	0.675	1	1 1/2 - 24	0.091	0.126	N/A	N/A
1/2	0.840	1 1/8	1 1/2 - 24	0.109	0.147	0.188	0.294
3/4	1.050	1 3/8	1 1/2 - 24	0.113	0.154	0.219	0.308
1	1.315	1 1/2	2 - 24	0.133	0.179	0.250	0.358
1-1/4	1.660	1 5/8	2 - 24	0.140	0.191	0.250	0.382
1-1/2	1.900	1 3/4	2 - 24	0.145	0.200	0.281	0.400
2	2.375	2	2 1/2 - 24	0.154	0.218	0.344	0.436
2-1/2	2.875	2 1/2	3 - 24	0.203	0.276	0.375	0.552
3	3.500	2 5/8	3 - 24	0.216	0.300	0.438	0.600
3-1/2	4.000	2 3/4	4 - 24	0.226	0.318	N/A	N/A
4	4.500	2 7/8	4 - 24	0.237	0.337	0.531	0.674
5	5.563	3	4 1/2 - 24	0.258	0.375	0.625	0.750
6	6.625	3 1/8	4 1/2 - 24	0.280	0.432	0.719	0.864
8	8.625	3 1/2	5 - 24	0.322	0.500	0.906	0.875

Confirms to:

ASTM A312 Type 304/304L or 316/316L—(Electric Resistance Welded).

ASTM A312 Type 304/304L or 316/316L—Seamless.