



The new degree of comfort.®



Commercial Gas  
Universal Ultra Low NOx Water Heaters

## Universal™ ultra low NOx is a family of commercial gas water heaters that are designed to fit into tight retrofit applications

### Features & Benefits

The tighter the commercial retrofit, the more you will appreciate how the Universal's compact size and multiple water connections simplify ultra low NOx installations. Choose from 80% thermal efficiency models that range from 125,000 - 399,900 BTU/h and 82% thermal efficiency models that range from 199,900 - 270,000 BTU/h. All models have a maximum temperature setting of 180°F.

### Space Saver Design

The short heights and narrow jacket diameters, plus the top, front and rear water inlets/outlets offer the ultimate in installation flexibility.

### System Sentinel™ LED Diagnostic System

Our exclusive diagnostic system, with glowing LED lights, verifies system operation sequence by sequence.



### Patented Technology

Universal's proprietary steel formulation, patented multi-flue design, combined with two coats of porcelain enamel, results in a superior heat exchanger design.

### Ultra Low NOx Burner

The power assist burner design incorporates stainless steel multi-port burner tubes for long term ultra low NOx performance, less than 14 ng/J. A sight glass allows for burner observation. The entire design is removable and it is highly resistant to the effects of negative air pressure common in modern commercial buildings.

### Base Rail Design

Provides for better handling when moving and positioning unit.

### Low Profile Automatic Flue Damper

Low profile damper minimizes overall product height. Heavy duty vent hood supports are designed to withstand the rigors of installation.

### Full-port, Full-flow Drain Valve

Factory installed brass drain valve allows for faster draining and servicing.

### Direct Spark-to-Pilot Ignition System

Energy saving ignition that ignites pilot only when there is a call for heat.

### Altitude Certifications

GNU100-200(A), -250(A), -270(A) models are certified up to 5,200 feet with conversion kits up to 10,100 ft above sea level. All other models are certified to 2,000 feet.

#### CONVERSION KIT NUMBERS

SP21065 for GNU100-200(A)
SP21066 for GNU100-250(A)
SP21067 for GNU100-270(A)

### Patented Anode Rods

Anode design utilizes multiple magnesium rods to ensure corrosion resistance for a long tank life.

### Warranty

3-Year limited tank warranty  
See Commercial Warranty Certificate for complete information.

**Efficiency** | All models tested according to ANSI test procedures, and meet or exceed the thermal efficiency and standby loss requirements of ASHRAE standard (EPact). Also exceeds energy efficiency codes of all states including California Energy Commission (CEC).

**Safety and Construction** | Design certified by CSA: For operation at 180 degrees; meets all safety and construction requirement of ANSI Z21.10.3; as an automatic storage or instantaneous water heater; as an automatic circulating tank water heater; and for operation on combustible floors and in alcove installations. **Certified for 150 PSI maximum working pressure (160 PSI for ASME models).**

**Optional Construction** | ASME construction is available on designated models.



## Rheem Universal Ultra Low NOx

35 to 100-Gallon Capacities  
125,000-399,900 BTU/h  
Natural Gas  
Top-Front-Rear Inlet/Outlet  
Water Connections



(On Selected Models)



INTEGRATED AIR & WATER




The new degree of comfort.




Commercial Gas  
Universal Ultra Low NOx Water Heaters

RECOVERY CAPACITIES (Up to 82% thermal efficiency)													
MODEL NUMBER	INPUT BTU/H	THERM. EFF.	GPH										
			40°F	50°F	60°F	70°F	80°F	90°F	100°F	110°F	120°F	130°F	140°F
GNU75-125	125,000	80%	303	242	202	173	152	135	121	110	101	93	87
GNU82-156	156,000	80%	378	303	252	216	189	168	151	138	126	116	108
GNU37-200*	199,900	82%	485	388	323	277	242	215	194	176	162	149	138
GNU76-200	199,900	80%	485	388	323	277	242	215	194	176	162	149	138
GNU91-200	199,900	82%	485	388	323	277	242	215	194	176	162	149	138
GNU100-200(A)	199,900	82%	485	388	323	277	242	215	194	176	162	149	138
GNU72-250(A)	250,000	80%	606	485	404	346	303	269	242	220	202	186	173
GNU100-250(A)	250,000	82%	606	485	404	346	303	269	242	220	202	186	173
GNU100-270(A)	270,000	82%	655	524	436	374	327	291	262	238	218	201	187
GNU65-360(A)	360,000	80%	873	698	582	499	436	388	349	317	291	269	249
GNU100-400(A)	399,900	80%	969	776	646	554	485	431	388	353	323	298	277

Recovery ratings are based on thermal efficiencies obtained in a CSA certified laboratory.  
(A) indicates available ASME model.

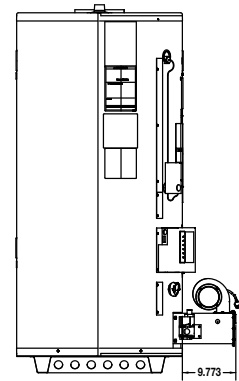

FIRST TIME DELIVERY (Includes useable storage and recovery for indicated times.)													
MODEL NUMBER	TANK CAP. GALLONS	INPUT BTU/H	TEMP. RISE AT 100°F IN GALLONS										MIN. TO REC. CONTENTS
			5 MIN.	10 MIN.	15 MIN.	20 MIN.	30 MIN.	45 MIN.	60 MIN.	120 MIN.	180 MIN.		
GNU75-125	75	125,000	63	73	83	93	113	143	174	209	295	416	37
GNU82-156	82	156,000	70	83	95	108	133	171	209	360	511	33	
GNU37-200*	35	199,900	41	56	72	88	119	167	214	403	562	11	
GNU76-200	76	199,900	69	86	102	118	150	199	247	441	635	24	
GNU91-200	91	199,900	80	96	112	128	161	209	258	451	645	28	
GNU100-200(A)	100	199,900	86	102	118	135	167	215	264	458	652	31	
GNU72-250(A)	72	250,000	71	91	111	131	172	232	293	535	778	18	
GNU100-250(A)	100	250,000	90	110	131	151	191	252	312	555	797	25	
GNU100-270(A)	100	270,000	92	114	135	157	201	266	332	594	855	23	
GNU65-360(A)	65	360,000	75	104	133	162	220	307	395	744	1093	11	
GNU100-400(A)	100	399,900	102	135	167	199	264	361	458	846	1233	15	

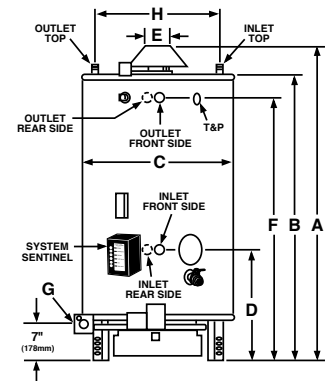

DIMENSIONS (Inches)													
MODEL NUMBER	A	B	C	D	E	F	G	H	WATER CONNECTIONS			APPROXIMATE SHIPPING WEIGHT	
									TOP IN/OUT	FRONT SIDE	REAR SIDE	STD.	ASME
									GNU75-125	65-1/2	61	26-1/4	25
GNU82-156	68-13/16	64	26-1/4	25	6	58-5/8	3/4	20	1-1/2	1-1/2	1-1/2	490 lbs.	N/A
GNU37-200*	49-1/4	43-3/8	26-1/4	25	6	37-5/8	3/4	20	1-1/2	1-1/2	1-1/2	405 lbs.	N/A
GNU76-200	68-13/16	64	26-1/4	25	6	58-5/8	3/4	20	1-1/2	1-1/2	1-1/2	540 lbs.	N/A
GNU91-200	76-5/16	71-13/16	26-1/4	30-5/8	6	66-3/8	3/4	20	1-1/2	1-1/2	1-1/2	600 lbs.	N/A
GNU100-200(A)	73-1/16	66-1/8	30-1/4	23-1/4	6	57-1/2	3/4	23	1-1/2	2	2	780 lbs.	835 lbs.
GNU72-250(A)	71-1/16	64-1/2	26-1/4	25	6	58-5/8	3/4	20	1-1/2	1-1/2	1-1/2	590 lbs.	630 lbs.
GNU100-250(A)	73-1/4	66-1/8	30-1/4	23-1/4	6	57-1/2	3/4	23	1-1/2	2	2	795 lbs.	835 lbs.
GNU100-270(A)	73-7/8	66-1/8	30-1/4	23-1/4	6	57-1/2	3/4	23	1-1/2	2	2	805 lbs.	845 lbs.
GNU65-360(A)	70-11/16	64-1/2	26-1/4	25	8	58-5/8	3/4	N/A	N/A	1-1/2	1-1/2	640 lbs.	680 lbs.
GNU100-400(A)	76	68-1/2	30-1/4	32-1/4	8	61-3/4	1	23	1-1/2	2	2	770 lbs.	810 lbs.

All Models Require a 120V / 1.5 Amp Power Source. (A) Suffix Indicates ASME Tank Construction Available.

\*Automatic circulating tank water heater

CLEARANCE TO COMBUSTIBLES (inches)			
MODEL NUMBER	SIDE	REAR	TOP
GNU75-125	2	2	12
GNU82-156	2	2	12
GNU37-200	2	2	12
GNU76-200	2	2	12
GNU91-200	2	2	12
GNU100-200(A)	2	4	12
GNU72-250(A)	6	6	12
GNU100-250(A)	2	4	12
GNU100-270(A)	2	4	12
GNU65-360(A)	6	6	12
GNU100-400(A)	6	6	12

**Recommended Specifications (for trade reference only)**

Water heater(s) shall be Universal ultra low NOx model \_\_\_\_\_, manufactured by Rheem, having gas input of \_\_\_\_\_ BTU/h and a recovery rate of \_\_\_\_\_ GPH at a 100°F temperature rise when tested and certified at \_\_\_\_\_ thermal efficiency. Water heater(s) shall have a storage capacity of \_\_\_\_\_ gallons. Water heater(s) shall have the CSA seal of certification and supplied with a factory installed CSA/ASME rated temperature and pressure relief valve. Tank(s) shall be furnished with a tube bundle having a double coating of high temperature porcelain enamel and furnished with magnesium anode rods rigidly supported. Water heater(s) shall meet or exceed the thermal efficiency and standby loss requirements of ASHRAE Standard 90.1b-2001. Tanks shall have a working pressure rating of 150 psi, and shall be completely factory assembled, including a pressure regulator properly adjusted for operation on \_\_\_\_\_ gas with stainless steel burners. Controls will be arranged for safety shutoff in event of pilot failure. Water heater(s) with inputs less than 360,000 BTU/h shall have top, front and rear side inlet/outlet water connections. Water heater(s) shall be covered by a three year limited warranty against tank leaks.

**When ordering ASME construction, place (A) after the model number (for trade reference only)**

Water heater(s) shall be constructed in accordance with the requirements of the ASME Boiler and Pressure Vessel Code, Section IV Part HLW.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

Rheem Water Heating • 1115 Northmeadow Parkway, Suite 100  
Roswell, Georgia 30076 • www.rheem.com

Rheem Canada Ltd./Ltée • 125 Edgeware Road, Unit 1  
Brampton, Ontario L6Y 0P5 • www.rheem.com



INTEGRATED AIR & WATER