

Product Submittal	
Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

HoldRite™ HR-W Series Washing Machine Outlet Box

Product Specification

HoldRite™ Washing Machine Outlet Boxes are designed for use in residential laundry spaces and allow for installation of water supply valves during the rough-in phase. Can be mounted for top or bottom supplied water lines and installed directly to a stud via flange holes or between studs using a HYCO bar or HoldRite™ 170. Outlet Box Assemblies include chrome-plated Hot and Cold supply valves with quarter-turn handles and 3/4" male threaded hose connections. Can be used with Copper, PEX, or CPVC. 2" drain socket and 3/4" IPS and CTS knockouts on top/bottom of box for connection of condensate/T&P drain lines. Face plate included. Optional integral water hammer arrestors for water shock wave prevention available. Drain funnel and other accessories sold separately. Fire-rated version available.





Materials

Valve:

- Body: Chrome-plated corrosion resistant DZR LF Brass
- Stem: Chrome-plated corrosion resistant DZR LF Brass
- Ball: Chrome-plated DZR LF Brass
- Seat: PTFE
- O-rings: EPDM Rubber
- Handle: Chrome-plated corrosion resistant AL Alloy
- Screw: Stainless Steel
- Nut: Chrome-plated Brass
- Ferrule: Brass

Arrestor: Stainless Steel, DZR LF Brass
Box: ABS
Face Plate: ABS (paintable)
Drain Funnel: ABS


Valve Performance


Maximum working temperature: 160 ˚F
Maximum working pressure: 125 PSI


Codes and Listings

Box: IAPMO PS54
Valves: ASME A112.18.1/CSA125.1, NSF/ANSI 14, NSF/ANSI/CAN 61,NSF/ANSI/CAN 372
Arrestors: ASSE1010
PEX-A Tubing: ASTM F876, ASTM F877, CSA B137.5 and listed for approval with the following connection methods: ASTM F1807/F2098/F1960/F2159/F3447/F3448
Copper Type L Tubing: ASTM B88
CPVC Tubing: ASTM D2486


Dimensions

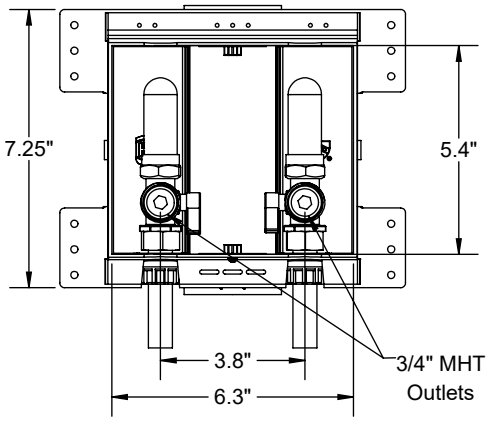

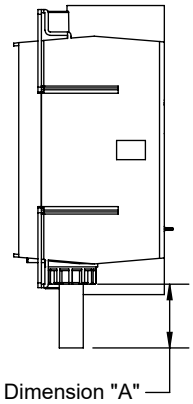


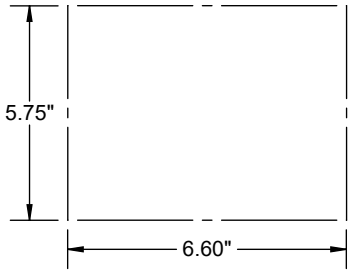


Minimum drywall cutout

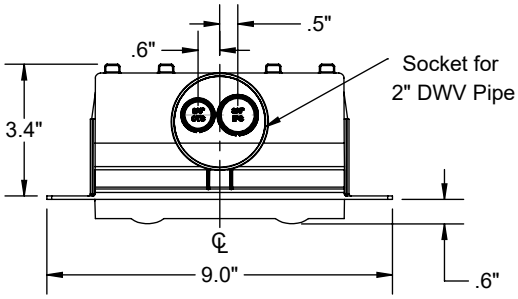


Part Number	Tube Type	Water Hammer Arrestor	Dimension "A"
☐HR-W-P	1/2" CTS PEX-A	-	1.60" Min.
☐HR-WA-P		✓	
☐HR-W-C	1/2" CTS CPVC	-	1.80" Min.
☐HR-WA-C		✓	
☐HR-W-M	1/2" CTS Copper Type L	-	2.60" Min.
☐HR-WA-M		✓	

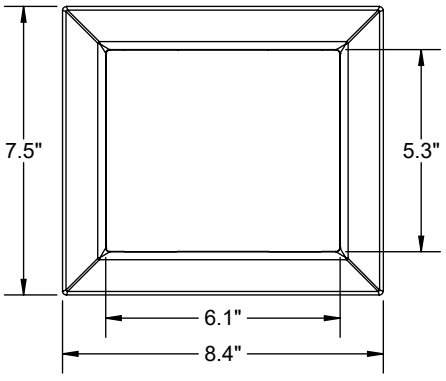



Face Plate adjustable between 1/2" to 1-1/4" drywall thickness



HR-W-FN
Drain Funnel
(Optional - Sold Separately)

US Contact: 1.877.700.4242 • sales@holdrite.com • holdrite.com
Canadian Contact 1.888.820.0120 • canadasales@rwc.com • holdrite.com

AN RWC BRAND