


HoldRite® Slider Bracket

The HoldRite Slider Bracket is a galvanized steel telescoping bracket for use in supporting tube or stub outs. Comes in 2 telescoping lengths pre-loaded with 1 or 2 variable closure clamps, supporting 1/2" - 1" copper, PEX or CPVC. Bendable end tabs allows attachment between studs, joists and can be recessed or surface mounted. Hole pattern on 3 sides permits use with a wide variety of other clamps and fittings.

Product Information

- Material:
 - Insert: TPV, natural (off-white)
 - Top & bottom clamp: nylon, medium blue, UL94V-2
 - Bracket: 24 gage, galvanized
- IAPMO listed, per standard PS42
- Compliant with IPC and UPC

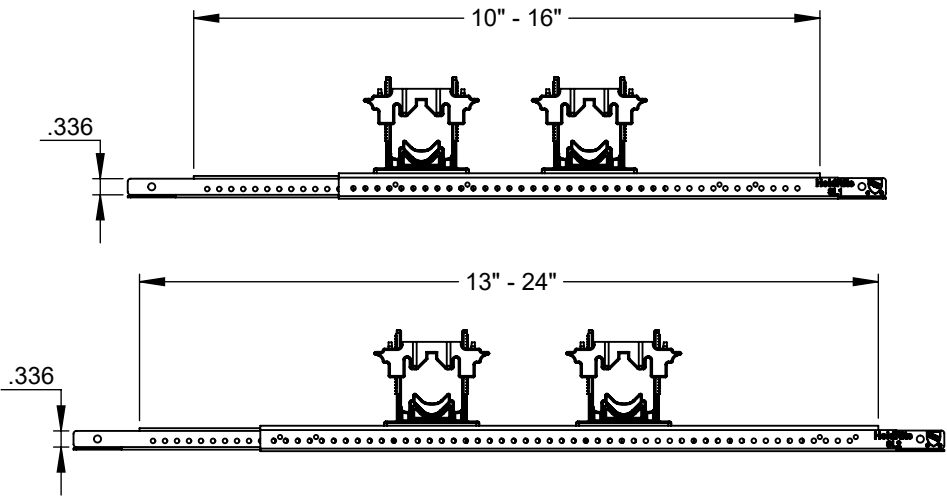

All Dimensions in Inches

#SL1 / SL1-1 / SL1-2

Beam Span (Inches)	Maximum Load (lbs.)
12	179
14.5	142
18	78

#SL2 / SL2-1 / SL2-2

Beam Span (Inches)	Maximum Load (lbs.)
16	140
22.5	53
24	44

#253 Clamp

Temperature (°F)	Maximum Load (lbs.)
-10° to +100°	91
+100° to +160°	68
+160° to +200°	55

Product Submittal	
Name	
Date	
Architect/Owner	
Contractor	
Tag	
Notes	

