


50NT-B

Comfort™ 13.4 SEER2 Single-Packaged Heat Pump System with Puron Advance™ (R-454B) Refrigerant Single Phase 2-5 Nominal Tons (Sizes 24-60) Three Phase 3-5 Nominal Tons (Sizes 36-60)



Turn to the experts

Product Data

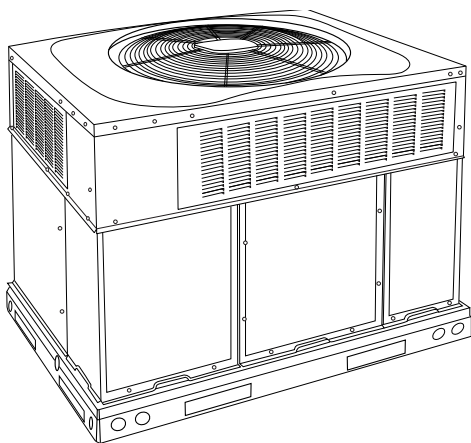

A09033

Fig. 1 – Unit 50NT-B

Single-Packaged Products with Energy-Saving Features and Puron Advance™ refrigerant.

- 13.4 SEER2
- 11.05 EER2
- 6.7 HSPF2
- ECM Motor-Standard
- Louvers-Standard
- Cabinet air leakage of 2.0% or less at 5 in. W.C. when tested in accordance with ASHRAE standard 193.
- Refrigerant leak detection dissipation system for added safety

Features/Benefits

One-piece Heat Pump unit with optional electric heater, low installation cost, dependable performance and easy maintenance.

Puron Advance is Carrier's Bryant's latest choice of refrigerant to help meet the 2025 GWP requirement. This unit is designed and tested with Puron Advance and contains a dissipation system.

Easy Installation

Factory-assembled package is a compact, fully self-contained, heat pump unit that is prewired, pre-piped, and pre-charged for minimum installation expense. These units are available in a variety of standard capacity ranges with voltage options to meet residential and light commercial requirements. Units are lightweight and install easily on a rooftop or at ground level. The high tech composite base eliminates rust problems associated with ground level applications.

Durable, dependable components

Scroll Compressors are designed for high efficiency. Each compressor is hermetically sealed against contamination to help promote longer life and dependable operation. Each compressor also has vibration isolation to provide quieter operation. All compressors have internal high pressure and overcurrent protection.

ECM Motor is standard on all models. Direct-drive, PSC (Permanent Split Capacitor) condenser-fan motors are designed to help reduce energy consumption and provide for cooling operation down to 40°F

(4.4°C) outdoor temperature. Low ambient kit is available as a field installed accessory.

Innovative Unit Base Design

On the inside a high-tech composite material will not rust and incorporates a sloped drain pan which improves drainage and helps inhibit mold, algae and bacterial growth. On the outside metal base rails provide added stability as well as easier handling and rigging.

Thermostat Controls designed to work as a system with Carrier's small packaged product.

Refrigerant system is designed to provide dependability. Liquid filter driers are used to promote clean, unrestricted operation. Each unit leaves the factory with non-ozone depleting and low global warming potential Puron Advance (R-454B) refrigerant charge. Refrigerant service connections make checking operating pressures easier. Factory-installed leak detection dissipation system for added safety

High and Low Pressure Switches provide added reliability for the compressor.

Indoor and Outdoor coils are computer-designed for optimum heat transfer and efficiency. The indoor coil is aluminum indoor coil and is located inside the unit for protection against damage. The outdoor coil is internally mounted on the top tier of the unit.

Low sound ratings ensure a quiet indoor and outdoor environment with sound ratings as low as 70.0 dBA.

Easy to service cabinets provide easy 3 panel accessibility to serviceable components during maintenance and installation. The base with integrated drain pan provides easy ground level installation with mounting pad. A nesting feature ensures a positive basepan to roof curb seal when the unit is roof mounted. A convenient 3/4-in. wide perimeter flange makes frame mounting on a rooftop easy.

Convertible duct configuration

Unit is designed for use in either downflow or horizontal applications. Each unit is converted from horizontal to downflow with the two standard duct covers. Downflow operation is easily provided in the field to allow vertical ductwork connections. The basepan utilizes seals on the bottom openings to ensure a positive seal in the vertical airflow mode.

Cabinets are constructed of heavy duty, phosphated, zinc-coated prepainted steel capable of withstanding 500 hours in salt spray. Interior surfaces of the evaporator and electric heater compartments are insulated with cleanable semi-rigid insulation board, which keeps the conditioned air from being affected by the outdoor ambient temperature and provides improved indoor air quality. (Conforms to American Society of Heating, Refrigeration and Air Conditioning Engineers No. 62P.) The sloped drain pan minimizes standing water in the drain. An external drain is provided.

Short-Cycling protection for the compressor is incorporated into our defrost control board ensuring a five minute delay (+/-2 minutes) before restarting compressor after shutdown for any reason.

Limited Warranty*

• Default 5 year parts limited warranty

-10 year parts limited warranty with timely registration. Equipment must be registered within 90 days of original installation, except in jurisdictions where warranty benefits cannot be conditioned on registration.

* Applies to original purchaser/homeowner and 5 years to subsequent owners.

• Default 5-year on compressor limited warranty

-10-year on compressor limited warranty with timely registration. Equipment must be registered within 90 days of original installation, except in jurisdictions where warranty benefits cannot be conditioned on registration.


* Applies to original purchaser/homeowner and 5 years to subsequent owners. See warranty certificate for complete details and restrictions

Table of Contents

Features/Benefits	1
Model Number Nomenclature	2
AHRI* Capacities	3
Physical Data	4
Accessories	5
Unit Dimensions - 24-30	7
Unit Dimensions - 36-60	8
Roof Curb Accessory Dimensions	9

Selection Procedure (with example)	10
Typical Piping and Wiring	20
Application Data	20
Balance Point Worksheet	21
Typical Connection Wiring Schematic - 208/230-1-60	24
Typical Ladder Wiring Schematic - 208/230-1-60	25
Controls	30
Guide Specifications	31

Model Number Nomenclature

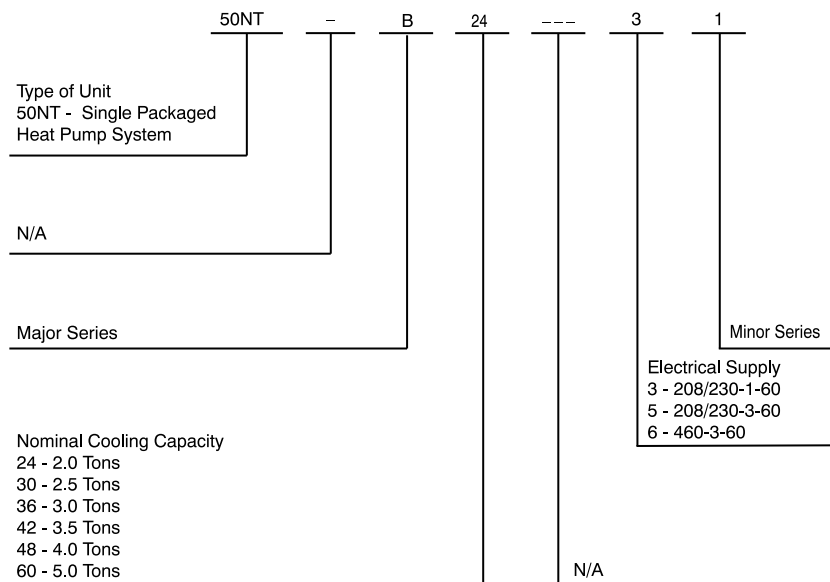

Use of the AHRI Certified TM Mark indicates a manufacturer's participation in the program. For verification of certification for individual products, go to www.ahridirectory.org.



SAP ORDERING NO.	NOMINAL COOLING CAPACITY (Btuh)	VOLTS-PHASE (60 HZ)	APPROX SHIP WT (LB)
50NT-B24---3	24,000	208/230-1	349
50NT-B30---3	30,000	208/230-1	384
50NT-B36---3	36,000	208/230-1	423
50NT-B36---5	36,000	208/230-3	423
50NT-B36---6	36,000	460-3	423
50NT-B42---3	42,000	208/230-1	444
50NT-B42---5	42,000	208/230-3	444
50NT-B42---6	42,000	460-3	444
50NT-B48---3	48,000	208/230-1	426
50NT-B48---5	48,000	208/230-3	426
50NT-B48---6	48,000	460-3	426
50NT-B60---3	60,000	208/230-1	475
50NT-B60---5	60,000	208/230-3	475
50NT-B60---6	60,000	460-3	475

AHRI* Capacities

Cooling Capacities and Efficiencies

UNIT SIZE	NOMINAL TONS	STANDARD CFM	COOLING CAPACITY (BTUH)†	EER2‡	SEER2**
24	2	750	22200	11.05	13.4
30	2.5	950	28600	11.05	13.4
36	3	1150	33800	11.05	13.4
42	3.5	1350	42000	11.05	13.4
48	4	1600	47000	11.05	13.4
60	5	1750	55000	11.05	13.4

Heat Pump Heating Capacities and Efficiencies

UNIT SIZE	HEATING CAPACITY (BTUH) @ 47°F (8.3°C)	COP @ 47°F (8.3°C)	HEATING CAPACITY (BTUH) @ 17°F (-8.3°C)	COP @ 17°F (-8.3°C)	HSPF2
24	24000	3.8	12400	2.2	6.7
30	27800	3.0	15800	2.1	6.7
36	35600	3.8	19900	2.4	6.7
42	41500	3.7	23400	2.3	6.7
48	45500	3.7	24800	2.26	6.7
60	57500	3.4	31000	2.3	6.7

LEGEND

dB—Sound Levels (decibels)

db—Dry Bulb

SEER2—Seasonal Energy Efficiency Ratio

wb—Wet Bulb

COP—Coefficient of Performance

HSPF2—Heating Season Performance Factor

* Air Conditioning, Heating & Refrigeration Institute.

**At “A” conditions—80°F (26.7°C) indoor db/67°F (19.4°C) indoor wb & 95°F (35°C) outdoor db.

†Rated in accordance with U.S. Government DOE Department of Energy) test procedures and/or AHRI Standards 210/240.

Notes:

1. Ratings are net values, reflecting the effects of circulating fan heat.

Ratings are based on:

Cooling Standard: 80°F (26.7°C) db, 67°F (19.4°C) wb indoor entering-air temperature and 95°F (35°C) db outdoor entering-air temperature.

2. Before purchasing this appliance, read important energy cost and efficiency information available from your retailer.

A-Weighted Sound Power Level (dBA)

UNIT SIZE	STANDARD RATING (dBA)	TYPICAL OCTAVE BAND SPECTRUM (dBA without tone adjustment)						
		125	250	500	1000	2000	4000	8000
24	70	55	59	65	66	61	57	49
30	72	57	62	68	68	63	57	49
36	71	63	59	65	67	61	57	50
42	74	58	63	69	69	64	62	55
48	75	59	64	69	70	67	63	56
60	72	60	63	66	67	64	61	55

NOTE: Tested in compliance with AHRI 270 but not listed with AHRI.

Physical Data

	24	30	36	42	48	60
Unit Size	2	2.5	3	3.5	4	5
Shipping Weight* (lb)	349	384	423	444	426	475
(kg)	159	174	192	201	193	215
Compressor Quantity	1					
Type	Scroll					
Refrigerant	R-410A					
Refrigerant Quantity (lb)	7.50	8.25	9.50	9.00	9.75	11.0
Quantity (kg)	3.4	3.7	4.3	4.1	4.4	5.0
Refrigerant Metering Device	Indoor TXV, Outdoor Dual Accuraters					
Minimum Conditioned Space Area (sq. ft.)	122	137	152	137	152	167
Orifice ID (in)	N/A					
(mm)						
Orifice OD (in)	0.032 (2)	0.032 (2)	0.040 (2)	0.042 (2)	0.046 (2)	0.046 (2)
(mm)	0.81 (2)	0.81 (2)	1.02 (2)	1.07 (2)	1.17 (2)	1.17 (2)
Outdoor Coil						
Rows...Fins/in,	1...21	2...21	1...21	1...21	2...21	2...21
face area (sq. ft.)	18.8	18.8	23.3	23.3	13.6	17.5
Outdoor Fan						
Nominal Airflow (cfm)	3000	3200	3500	3500	3000	3500
Diameter (in.)	24	24	26	26	26	26
Diameter (mm)	610	610	660	660	660	660
Motor hp (rpm)	1/10 (810)	1/5 (810)	1/5 (810)	1/5 (810)	1/5 (810)	1/5 (810)
Indoor Coil						
Rows...Fins/in,	3...15	3...17	3...17	3...17	3...17	3...17
face area (sq. ft.)	3.7	3.7	4.7	4.7	5.6	5.6
Indoor Blower						
Required Minimum Dissipation Airflow (cfm)	213	239	266	239	266	293
Nominal Airflow (cfm)	750	950	1150	1350	1600	1750
Size (in.)	10 x 10	10 x 10	11 x 10	11 x 10	11 x 10	11 x 10
Size (mm)	254 x 254	254 x 254	279 x 254	279 x 254	279 x 254	279 x 254
Motor hp (rpm)	1/2	1/2	1/2	3/4	1	1
High Pressure Switch (psig)	650 +/- 15					
Cutout	420 +/- 25					
Reset (Auto)						
Loss-of-Charge/Low Pressure Switch (psig)	20 +/- 5					
Cutout	45 +/- 10					
Reset (Auto)						
Return Air Filters	2 each 20x12x1 in.		1 each 24x14x1 in.		1 each 24x16x1 in.	
disposable†	508x305x25 mm		610x356x25 mm		610x406x25 mm	
			24x16x1 in.		24x18x1 in.	
			610x406x25 mm		610x457x25 mm	

*. For 460 volt units, add 14 lb (6.4 kg) to the weight.

†. Required filter sizes shown are based on the larger of the AHRI (Air Conditioning Heating and Refrigeration Institute) rated cooling airflow or the heating airflow velocity of 300-350 ft/minute for throwaway type or 450 ft/minute for high-capacity type. Air filter pressure drop for non-standard filters must not exceed 0.08 IN. W.C.
If using accessory filter rack refer to the filter rack installation instructions for correct filter size and quantity.

Accessories

PART NUMBER	DESCRIPTION		USED WITH
CPRFCURB011B00*	Roof Curb, 14-in. High		24 - 60
CPRFCURB013B00			36 - 60
CPADCURB001A00†	Adapter curb		24 - 30
CPADCURB002A00†			36 - 60
CPGSKTKIT001A00	Gasket Kit for existing roof curb with new base rail unit		All
CPECOMZR007B00	Economizer - Vertical, gear driven w/Filter Rack and 1-in. filter		24 - 30
CPECOMZR008A00			36 - 42
CPECOMZR009A00			48 - 60
CPECOMZR010A00	Economizer - Horizontal w/Filter Rack and 1-in filter.		24 - 30
CPECOMZR011A00			36 - 42
CPECOMZR012A00			48 - 60
AXB078ENT	Outdoor Enthalpy Control		ALL
CPMANDPR007A00	Manual Outside Air Damper - External w/Filter Rack and 1-in. filters		24 - 30
CPMANDPR008A00			36 - 42
CPMANDPR009A00			48 - 60
CPFILTRK007A00	Internal Filter Rack (includes 1-in. filters)		24 - 30
CPFILTRK008A00			36 - 42
CPFILTRK009A00			48 - 60
CPLOWAMB001A00	Low Ambient Control		ALL
CPDUCFLG002A00	Square to Round (1 set of 2, used with horizontal duct flanges only)		24 - 48
CPHSTART002A00	Compressor Start Assist Kit (single phase only)		ALL
CPCRKHTR008A00	240V Crankcase Heater Single Phase		24 - 36
CPCRKHTR004A00			42 - 60
NRTIMEGD001A00	Five Minute Compressor Delay		ALL
HN65KJ016	Relay Pilot Duty		ALL
CPFLUEDS001A00	Flue Discharge Deflector Assembly		ALL
ELECTRIC HEATERS (208/230 — SINGLE PHASE — 60 Hz)			
	Nominal Capacity (kW)	Fuses	
CPHEATER052B0‡	5.0	-	24 - 42
CPHEATER064B0‡	5.0	4	ALL
CPHEATER069B0‡	7.2	-	24
CPHEATER070B0‡	7.2	4	ALL
CPHEATER050B0‡	10.0	4	ALL
CPHEATER066B0‡	15.0	6	36 - 60
CPHEATER133B0‡	15.0	4	30
CPHEATER054B0‡	20.0	6	42 - 60
ELECTRIC HEATERS (208/230 — THREE PHASE — 60 Hz)			
CPHEATER055B0‡	5.0	-	36 - 60
CPHEATER056B0‡	10.0	-	36 - 48
CPHEATER068B0‡	10.0	6	36 - 60
CPHEATER058B0‡	15.0	6	36 - 60
CPHEATER059B0‡	20.0	6	42 - 60
ELECTRIC HEATERS (460 THREE PHASE — 60 Hz)			
CPHEATER061B0‡	10.0	-	36 - 60
CPHEATER062B0‡	15.0	-	36 - 60
CPHEATER063B0‡	20.0	-	42 - 60

*. CPRFCURB011B00 can be used with 42-60 size units with some overhang.

†. Can also be used when replacing other manufacturer's older generation units that contain a composite base without a metal base rail.



‡. Denotes digit can be 0, 1 or 2.

Note: If installing an accessory heater, the thermostat must have capability to energize "G" (fan) on a call for "W" (electric heat). TSTAT0406 and TSTAT0408 contain this feature.


Minimum Airflow for Reliable Electric Heater Operation (CFM)

SIZE	24	30	36	42	48	60
AIRFLOW (CFM)	800	1025	1250	1400	1710	1800



ECONOMIZER

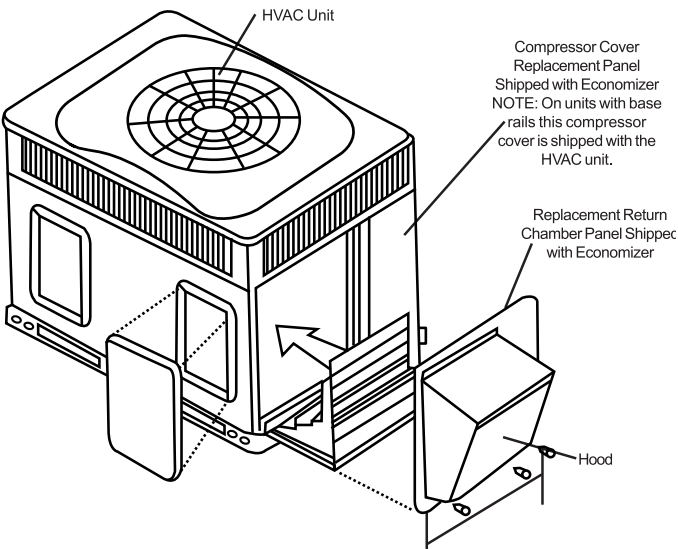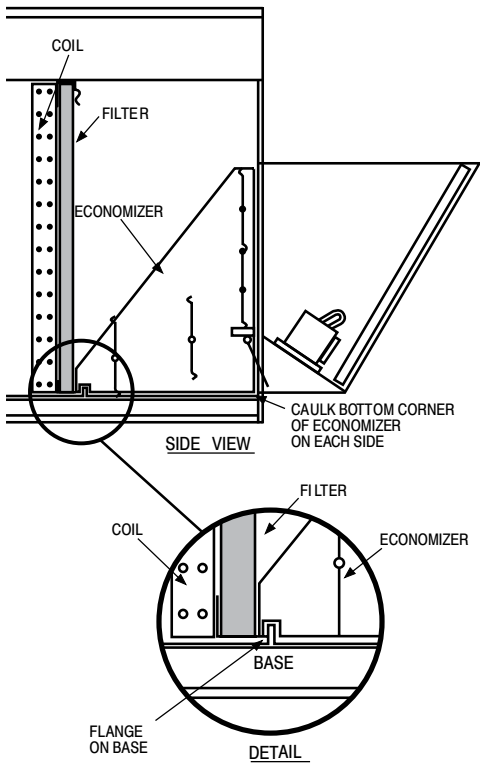

Vertical Economizer

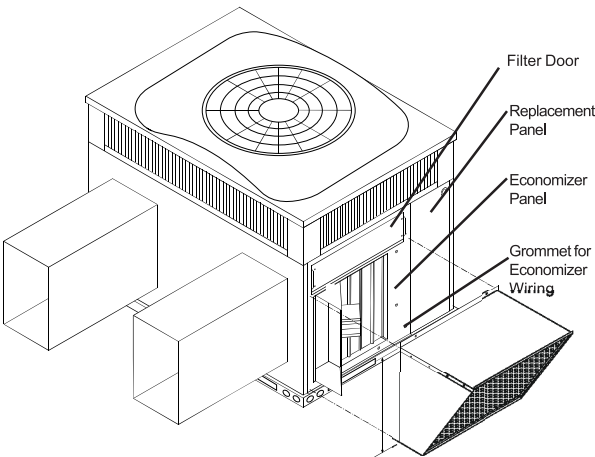

Horizontal Economizer

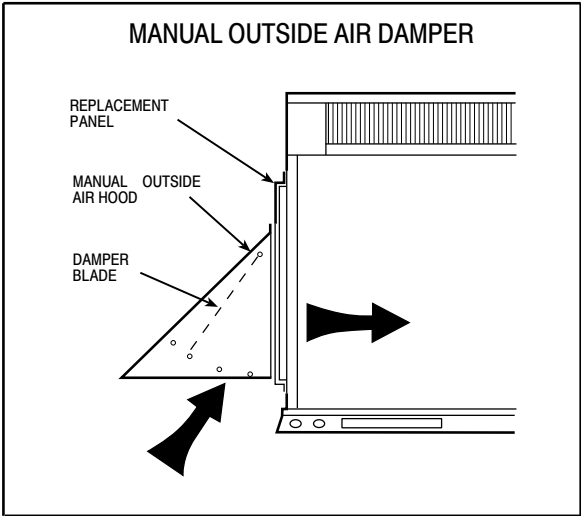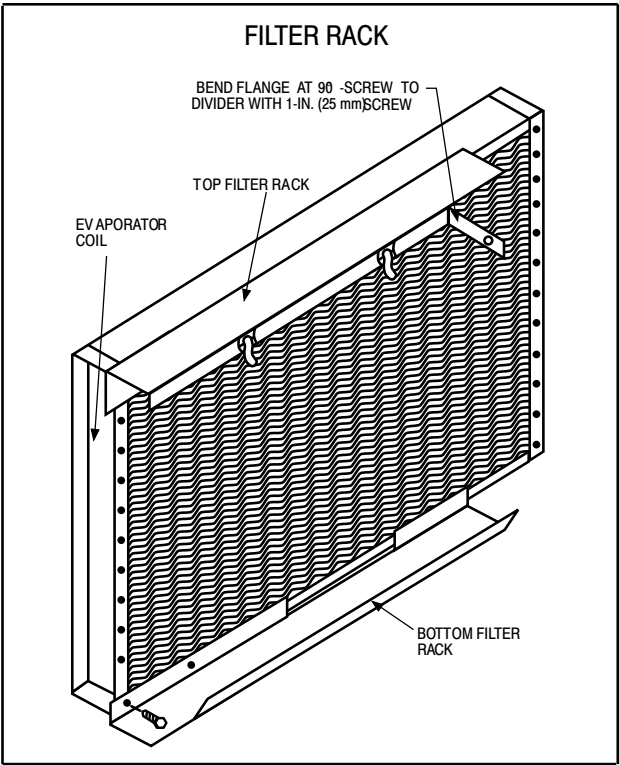


A09375

Unit Dimensions - 24-30

COOLING CAPACITY	UNIT WT.		UNIT HEIGHT IN/MM		CENTER OF GRAVITY IN/MM		
	LB	KG	"A"		X	Y	Z
24	338	153.3	51-3/4	1315	20-1/2	520.7	394
24	338	153.3	51-3/4	1315	20-1/2	520.7	394
30	373	169.2	51-3/4	1315	20-1/2	520.7	394

UNIT	CORNER HEIGHT LB/KG		
	"1"	"2"	"3"
24	86.3	39.2	76.2
24	86.3	39.2	76.2
30	95.3	43.2	83.9
30	95.3	43.2	83.9

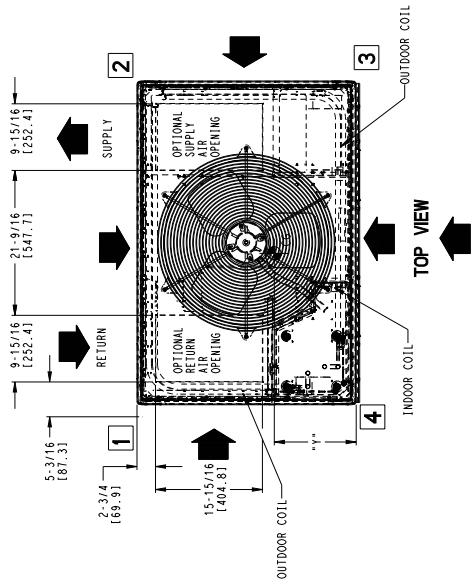

REQUIRED CLEARANCES TO COMBUSTIBLE MATL.

INCHES (MM)

TOP OF UNIT..... 2 (50.8)

DUCT SIDE OF UNIT..... 2 (50.8)

SIDE OPPOSITE DUCTS..... 14 (355.8)

BOTTOM OF UNIT..... 0 (0.0)

ELECTRICAL PANEL..... 36 (914.4)

REC. REQUIRED CLEARANCES

INCHES (MM)

BETWEEN UNITS, POWER ENTRY SIDE..... 42 (1066.8)

UNIT AND BLOCK OR CONCRETE WALLS AND OTHER GROUNDED SURFACES, POWER ENTRY SIDE..... 42 (1066.8)

REQUIRED CLEARANCE FOR OPERATION AND SERVICING

INCHES (MM)

EVAP. COIL ACCESS SIDE..... 36 (914.0)

POWER ENTRY SIDE..... 42 (1066.8)

(EXCEPT FOR REC REQUIREMENTS)

UNIT AND BLOCK OR CONCRETE WALLS AND OTHER GROUNDED SURFACES, POWER ENTRY SIDE..... 42 (1066.8)



DUCT SIDE OPPOSITE DUCTS..... 48 (1219.2)

DUCT SIDE OPPOSITE DUCTS..... 36 (914.0)

DUCT PANEL..... 12 (304.8)

***MINIMUM DISTANCES: IF UNIT IS PLACED LESS THAN 12 (304.8) FROM WALL SYSTEM, THEN SYSTEM PERFORMANCE MAY BE COMPROMISED.**

DIMENSIONS IN () ARE IN MILLIMETERS

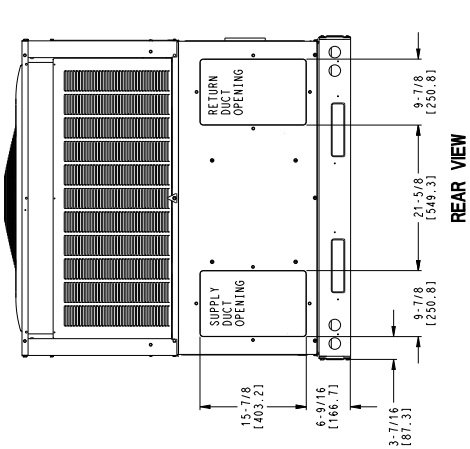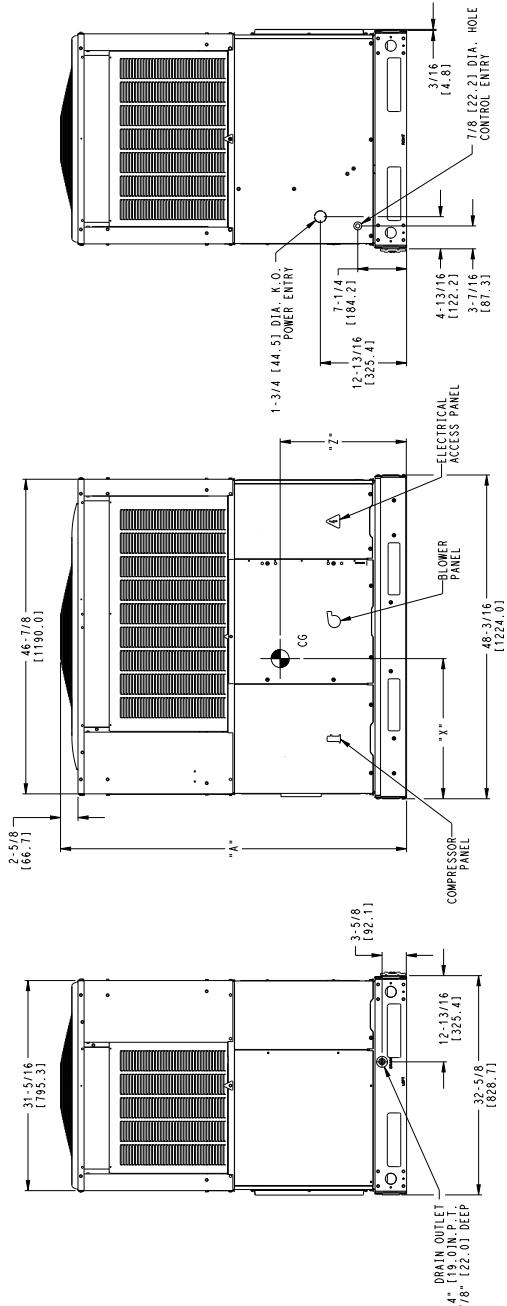

SD5986 - 4	-
------------	---

Unit Dimensions - 36-60

COOLING CAPACITY	UNIT WT. LB	UNIT HEIGHT IN/MM	CENTER OF GRAVITY IN/MM			
			Y	Z	Y	Z
36	409	184.2	54.3/4	1391	20-1/2	521
42	438	193.3	54.3/4	1437	20-1/2	521
48	467	202.0	54.3/4	1483	20-1/2	521
60	496	210.7	54.3/4	1529	20-1/2	521

UNIT	CORNER WEIGHT LBS/KG			
	1"	2"	3"	4"
36	89.2	40.3	35.8	19.0
42	93.8	42.6	37.7	20.4
48	98.6	45.1	40.3	22.1
60	103.4	47.6	42.9	23.8

REQUIRED CLEARANCES TO COMBUSTIBLE UNIT.

	INCHES (MM)
TOP OF UNIT, POWER ENTRY SIDE	14 (355.6)
TOP OF UNIT, POWER ENTRY SIDE, OPPOSITE DUCTS	14 (355.6)
TOP OF UNIT, POWER ENTRY SIDE, OPPOSITE DUCTS	14 (355.6)
BOTTOM OF UNIT, POWER ENTRY SIDE	0 (0.0)
BOTTOM OF UNIT, POWER ENTRY SIDE	36 (914.4)

NEC REQUIRED CLEARANCES



	INCHES (MM)
BETWEEN UNITS, POWER ENTRY SIDE	36 (914.4)
UNIT AND UNGROUNDED SURFACES, POWER ENTRY SIDE	36 (914.4)
UNIT AND BLOCK OR CONCRETE WALLS AND OTHER GROUNDED SURFACES, POWER ENTRY SIDE	42 (1066.8)

REQUIRED CLEARANCE FOR OPERATION AND SERVICE

	INCHES (MM)
EVAP. COIL ACCESS SIDE	42 (1066.8)
POWER ENTRY SIDE	42 (1066.8)
(EXCEPT FOR NEC REQUIREMENTS)	48 (1219.2)
DUCT OPPOSITE DUCTS	36 (914.4)
DUCT OPPOSITE DUCTS	12 (304.8)



*MINIMUM DISTANCES: IF UNIT IS PLACED LESS THAN 12 (304.8) FROM WALL OR OTHER SURFACE, THEN SYSTEM PERFORMANCE MAY BE COMPROMISED.

DIMENSIONS IN [] ARE IN MILLIMETERS

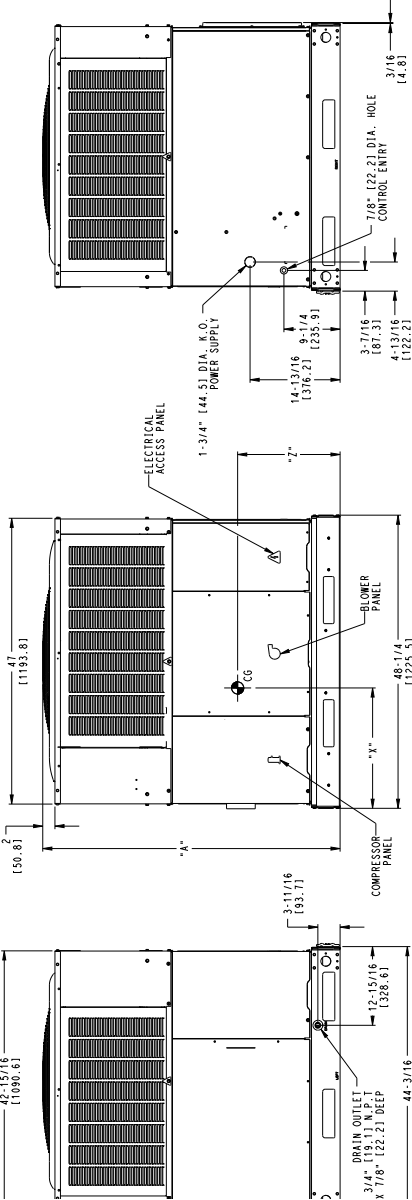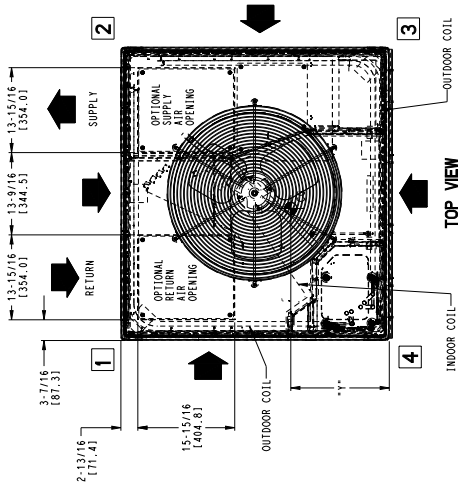


SD5986 - 4


Roof Curb Accessory Dimensions

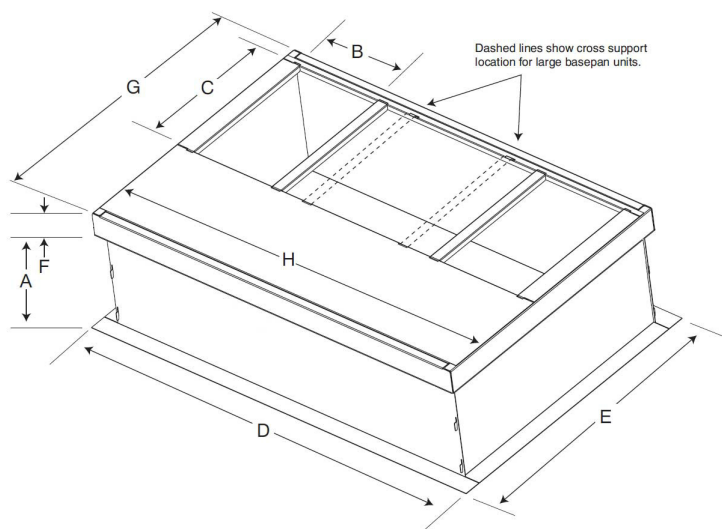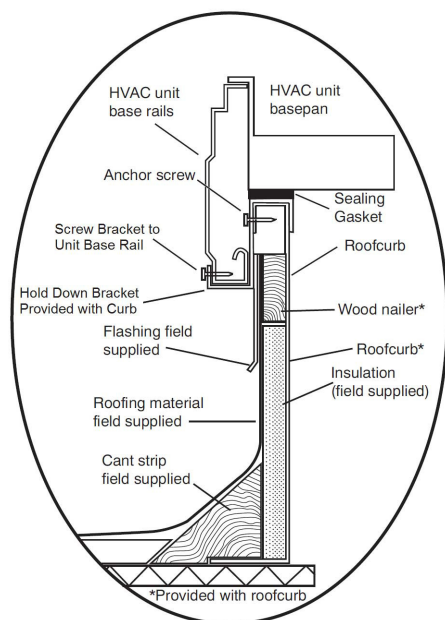

SMALL/COMMON CURB

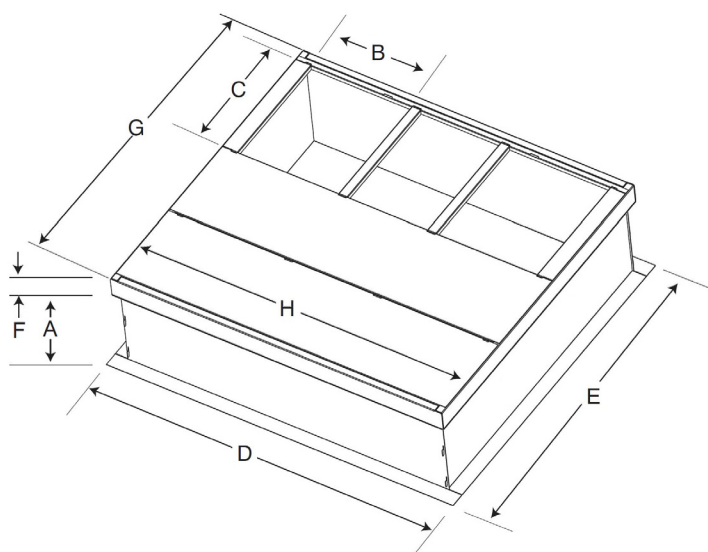

LARGE CURB

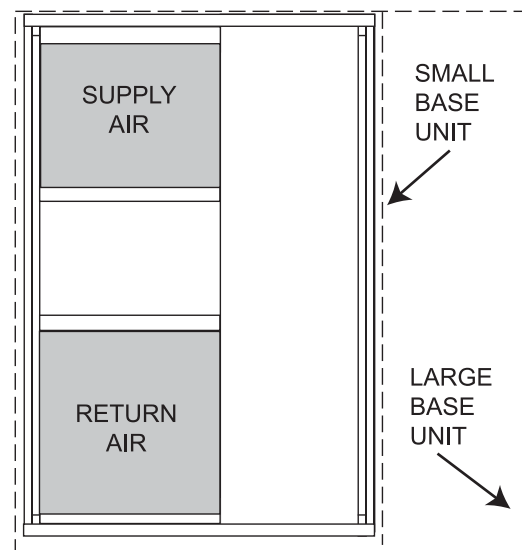

UNIT PLACEMENT ON
COMMON CURB

SMALL OR LARGE BASE UNIT

UNIT SIZE	CATALOG NUMBER	A IN. (mm)	B (small/common base) IN. (mm)*	B (large base) IN. (mm)*	C IN. (mm)	D IN. (mm)	E IN. (mm)	F IN. (mm)	G IN. (mm)	H IN. (mm)
Small or Large	CPRFCURB011B00	14 (356)	10 (254)	14 (356)	16 (406)	47.8 (1214)	32.4 (822)	2.7 (69)	30.6 (778)	46.1 (1170)
Large	CPRFCURB013B00	14 (356)	14 (356)				43.9 (1116)		42.2 (1072)	

A180216

*. Part Number CPRFCURB011B00 can be used on both small and large basepan units. The cross supports must be located based on whether the unit is a small basepan or a large basepan.

NOTES:

1. Roof curb must be set up for unit being installed.
2. Seal strip must be applied, as required, to unit being installed.
3. Roof curb is made of 16-gauge steel.
4. Attach ductwork to curb (flanges of duct rest on curb).
5. Insulated panels: 1-in. (25 mm) thick fiberglass 1 lb. density.

Selection Procedure (with example)
Determine cooling and heating requirements at design conditions:

Given:

Required Cooling Capacity (TC).....29,000Btuh
Sensible Heat Capacity (SHC).....21,000 Btuh
Required Heating Capacity42,000 Btuh
Condenser Entering Air Temperature95°F (35°C)
Indoor-Air Temperature80°F (27°C) edb 67°F (19°C) ewb
Evaporator Air Quantity..... 1000 CFM
External Static Pressure 0.300 IN. W.C.
Electrical Characteristics 208-1-60

Select unit based on required cooling capacity.
Enter Performance Data table at condenser entering temperature of 95°F (35°C). Unit 30 at 950 CFM and 67°F (19°C) ewb (entering wet bulb) will provide a total capacity of 28,600 Btuh and a SHC of 21,200 Btuh. Calculate SHC correction, if required, using Note 4 under Cooling Capacities tables.

Select heating capacity of unit to provide design condition requirement.

In the Heating Capacities and Efficiencies table, note that the 30 size unit will deliver 27,800 BTUH at the AHRI high temp rating point. To achieve 42,000 BTUH, accessory electric heat will be required. Use the Balance Point Worksheet to plot the load line with the unit capacity. The difference between the load line and unit capacity at the design heating temperature is the amount of electric heat that will be required.

Determine fan speed and power requirements at design conditions.

Before entering the air delivery tables, calculate the total static pressure required. From the given example, the Wet Coil Pressure Drop Table, and the Filter Pressure Drop Table:

External Static Pressure	0.300 IN. W.C.
Filter	0.060 IN. W.C.
Wet Coil Pressure Drop	<u>0.060 IN. W.C.</u>
Total Static Pressure	0.42 IN. W.C.

Enter the table for Dry Coil Air Delivery- At 0.42 IN. W.C. ESP (external static pressure) and MED-HIGH speed the motor delivers between 1037 CFM and 987 CFM. Interpolation estimates 1027 CFM at .42 IN. W.C. MED-HIGH delivers CFM needed.

Select unit that corresponds to power source available.

The Electrical Data Table shows that the unit is designed to operate at 208/230-1-60.

Performance Data
24 Cooling Extended Performance Table

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES deg F (C)																	
		75 (23.9)			85 (29.4)			95 (35)			105 (40.6)			115 (46.1)			125 (51.7)		
		Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW
CFM	EWB	Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens	
700	57 (13.9)	22.6	22.6	1.5	21.8	21.8	1.7	20.8	20.8	1.9	17.5	17.5	2.3	16.6	16.6	2.5	15.8	15.8	2.6
	62 (16.7)	23.5	22.0	1.5	22.4	21.4	1.7	21.4	20.3	1.9	17.9	16.8	2.3	17.0	15.4	2.5	16.3	14.2	2.6
	63* (17.2)	24.0	17.7	1.5	22.9	17.2	1.7	21.6	16.6	1.9	17.9	14.3	2.3	16.8	13.6	2.5	15.8	13.3	2.6
	67 (19.4)	25.8	18.5	1.6	24.6	17.9	1.7	23.2	17.3	1.9	19.3	14.9	2.3	18.1	14.2	2.5	16.9	13.8	2.6
	72 (22.2)	28.1	14.8	1.6	26.8	14.1	1.7	25.4	13.6	1.9	21.0	11.6	2.3	19.7	10.9	2.5	18.5	10.5	2.7
750	57 (13.9)	22.2	22.2	1.6	21.5	21.1	1.7	20.4	19.8	1.9	17.2	16.3	2.3	16.3	15.0	2.5	15.6	13.9	2.6
	62 (16.7)	22.5	21.4	1.6	21.5	20.9	1.7	20.5	19.8	1.9	17.2	16.3	2.3	16.3	15.0	2.5	15.6	13.9	2.6
	63* (17.2)	22.7	17.3	1.6	21.7	16.7	1.7	20.5	16.1	1.9	17.0	13.9	2.3	16.0	13.2	2.5	14.9	12.9	2.6
	67 (19.4)	24.4	18.0	1.6	23.3	17.4	1.7	22.0	16.8	1.9	18.3	14.5	2.3	17.2	13.8	2.5	16.1	13.5	2.6
900	72 (22.2)	26.6	14.4	1.6	25.4	13.8	1.7	24.0	13.2	1.9	19.9	11.3	2.3	18.7	10.6	2.5	17.5	10.2	2.7
	57 (13.9)	24.5	24.5	1.6	23.7	23.7	1.8	22.6	22.5	1.9	18.9	18.6	2.3	18.0	17.1	2.5	17.2	15.8	2.7
	62 (16.7)	24.8	24.7	1.6	23.7	23.7	1.8	22.6	22.5	1.9	18.9	18.6	2.3	18.0	17.1	2.5	17.2	15.8	2.7
	63* (17.2)	25.1	19.7	1.6	23.9	19.1	1.8	22.6	18.4	1.9	18.7	15.8	2.3	17.6	15.1	2.5	16.5	14.7	2.7
	67 (19.4)	27.0	20.5	1.6	25.7	19.8	1.8	24.3	19.2	2.0	20.2	16.5	2.3	18.9	15.7	2.5	17.7	15.3	2.7
	72 (22.2)	29.4	16.4	1.6	28.1	15.7	1.8	26.5	15.1	2.0	22.0	12.9	2.4	20.6	12.1	2.5	19.3	11.7	2.7

* At 75°F (23.9 °C) entering dry bulb—Tennessee Valley Authority [TVA] rating conditions; all others at 80°F (26.7 °C) entering dry bulb. See Legend and Notes.

24 Heating Extended Performance Table -10-60°F (-23.3-15.6°C)

INDOOR AIR		OUTDOOR COIL ENTERING AIR TEMPERATURE																															
		-10°F (-23.3°C)				0°F (-17.8°C)				10°F (-12.2°C)				20°F (-6.7°C)				30°F (-1.1°C)				40°F (4.4°C)				50°F (8.3°C)				60°F (15.6°C)			
		Capacity (Mbtuh)		Total Sys	kW	Capacity (Mbtuh)		Total Sys	kW	Capacity (Mbtuh)		Total Sys	kW	Capacity (Mbtuh)		Total Sys	kW	Capacity (Mbtuh)		Total Sys	kW	Capacity (Mbtuh)		Total Sys	kW	Capacity (Mbtuh)		Total Sys	kW				
EDB	CFM	Total	Integ	Total		Integ	Total	Integ		Total	Integ	Total		Integ	Total	Integ		Total	Integ	Total		Integ	Total	Integ		Total	Integ	Total		Integ	Total	Integ	
65°F (18.3°C)	700	5.6	5.2	1.46	8.3	7.6	1.50	10.5	9.6	1.56	13.7	12.4	1.61	16.8	14.7	1.67	20.0	20.0	1.76	25.4	25.4	1.85	28.5	28.5	1.98								
	750	5.7	5.2	1.43	8.4	7.7	1.47	10.6	9.8	1.53	13.8	12.5	1.58	17.0	14.9	1.63	20.2	20.2	1.71	25.6	25.6	1.80	28.8	28.8	1.92								
	900	5.8	5.4	1.51	8.5	7.9	1.56	10.8	9.9	1.61	14.0	12.6	1.65	17.2	15.0	1.71	20.4	20.4	1.78	25.9	25.9	1.87	29.0	29.0	1.98								
70°F (21.1°C)	700	5.5	5.0	1.52	8.1	7.4	1.57	10.2	9.4	1.63	13.3	12.0	1.68	16.4	14.4	1.75	19.5	19.5	1.83	24.7	24.7	1.93	27.8	27.8	2.06								
	750	5.5	4.9	1.49	8.2	7.3	1.54	10.3	9.4	1.59	13.4	12.4	1.64	16.6	15.4	1.70	19.7	19.7	1.78	25.0	25.0	1.88	28.1	28.1	2.00								
	900	5.7	5.2	1.57	8.3	7.7	1.61	10.5	9.6	1.67	13.6	12.3	1.72	16.7	14.7	1.77	19.8	19.8	1.85	25.2	25.2	1.94	28.2	28.2	2.05								
75°F (23.9°C)	700	5.4	4.9	1.58	7.9	7.3	1.63	10.0	9.2	1.70	13.0	11.8	1.75	16.2	14.2	1.82	19.3	19.3	1.91	24.5	24.5	2.01	27.5	27.5	2.14								
	750	5.4	5.0	1.55	8.0	7.4	1.60	10.1	9.3	1.65	13.2	11.9	1.71	16.4	14.4	1.77	19.5	19.5	1.85	24.7	24.7	1.95	27.8	27.8	2.08								
	900	5.6	5.1	1.63	8.2	7.5	1.67	10.3	9.5	1.73	13.3	12.1	1.78	16.6	14.5	1.84	19.6	19.6	1.92	25.0	25.0	2.01	28.0	28.0	2.13								

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

Performance Data
30 Cooling Extended Performance Table

EVAPORATOR		CONDENSER ENTERING AIR TEMPERATURES deg F (C)																	
AIR		75 (23.9)			85 (29.4)			95 (35)			105 (40.6)			115 (46.1)			125 (51.7)		
CFM	EWB	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW
		Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens	
875	57	29.0	29.0	1.9	28.0	28.0	2.1	26.7	26.7	2.3	22.7	22.7	2.7	21.5	21.5	3.0	20.3	20.3	3.2
	62	30.1	27.3	1.9	28.8	26.7	2.1	27.4	25.2	2.3	23.3	21.1	2.7	22.1	19.2	3.0	20.9	17.7	3.2
	63	30.7	22.1	1.9	29.3	21.3	2.1	27.7	20.6	2.3	23.3	17.9	2.7	21.9	16.9	3.0	20.2	16.5	3.2
	67	33.0	23.0	1.9	31.6	22.2	2.1	29.8	21.5	2.3	25.0	18.7	2.7	23.5	17.6	3.0	21.7	17.2	3.2
950	72	36.0	18.4	1.9	34.4	17.6	2.1	32.5	16.9	2.3	27.3	14.6	2.8	25.6	13.6	3.0	23.7	13.1	3.3
	57	28.9	28.1	1.9	27.9	26.5	2.1	26.6	24.9	2.3	22.6	20.8	2.8	21.5	18.9	3.0	20.3	17.5	3.2
	62	29.2	27.0	1.9	27.9	26.3	2.1	26.6	24.9	2.3	22.6	20.8	2.8	21.5	18.9	3.0	20.3	17.5	3.2
	63	29.5	21.8	1.9	28.2	21.1	2.1	26.6	20.4	2.3	22.3	17.7	2.8	21.0	16.7	3.0	19.4	16.3	3.2
	67	31.7	22.7	1.9	30.3	21.9	2.1	28.6	21.2	2.3	24.0	18.4	2.8	22.6	17.4	3.0	20.9	17.0	3.2
1125	72	34.6	18.1	1.9	33.0	17.3	2.1	31.3	16.7	2.4	26.2	14.4	2.8	24.6	13.4	3.0	22.8	12.9	3.3
	57	31.5	31.5	2.0	30.4	29.9	2.1	28.9	28.0	2.4	24.6	23.4	2.8	23.4	21.3	3.1	22.1	19.7	3.3
	62	31.8	30.7	2.0	30.4	29.6	2.1	29.0	28.0	2.4	24.6	23.4	2.8	23.4	21.3	3.1	22.1	19.7	3.3
	63	32.2	24.5	2.0	30.7	23.7	2.1	29.0	22.9	2.4	24.3	19.9	2.8	22.9	18.8	3.1	21.2	18.3	3.3
	67	34.6	25.5	2.0	33.0	24.7	2.2	31.2	23.9	2.4	26.2	20.7	2.8	24.6	19.6	3.1	22.7	19.1	3.3
1125	72	37.7	20.4	2.0	36.0	19.5	2.2	34.1	18.8	2.4	28.5	16.2	2.9	26.8	15.1	3.1	24.8	14.5	3.3

* At 75°F (23.9 °C) entering dry bulb—Tennessee Valley Authority [TVA] rating conditions; all others at 80°F (26.7 °C) entering dry bulb. See Legend and Notes.

30 Heating Extended Performance Table -10-60°F (-23.3-15.6°C)

INDOOR AIR		OUTDOOR COIL ENTERING AIR TEMPERATURE																													
		-10°F (-23.3°C)				0°F (-17.8°C)				10°F (-12.2°C)				20°F (-6.7°C)				30°F (-1.1°C)				40°F (4.4°C)				50°F (8.3°C)				60°F (15.6°C)	
EDB	CFM	Capacity (Mbtuh)		Total Sys kW	Capacity (Mbtuh)		Total Sys kW	Capacity (Mbtuh)		Total Sys kW	Capacity (Mbtuh)		Total Sys kW	Capacity (Mbtuh)		Total Sys kW	Capacity (Mbtuh)		Total Sys kW	Capacity (Mbtuh)		Total Sys kW	Capacity (Mbtuh)		Total Sys kW	Capacity (Mbtuh)		Total Sys kW			
		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ	Total
65°F (18.3°C)	875	7.6	7.0	1.9	10.7	9.9	2.0	13.3	12.2	2.1	17.0	15.3	2.1	20.6	18.1	2.2	23.7	23.7	2.3	29.4	29.4	2.6	33.1	33.1	2.7						
	950	7.7	7.1	1.9	10.8	10.0	2.0	13.4	12.3	2.0	17.1	15.5	2.1	20.8	18.3	2.2	24.0	24.0	2.3	29.7	29.7	2.5	33.4	33.4	2.7						
	1125	7.9	7.3	2.0	11.0	10.2	2.0	13.6	12.5	2.1	17.3	15.7	2.2	21.0	18.4	2.3	24.2	24.2	2.3	30.0	30.0	2.5	33.6	33.6	2.7						
70°F (21.1°C)	875	7.4	6.8	2.0	10.5	9.6	2.1	12.9	11.9	2.2	16.5	14.9	2.2	20.1	17.6	2.3	23.1	23.1	2.4	28.6	28.6	2.7	32.2	32.2	2.8						
	950	7.5	6.7	2.0	10.6	9.5	2.0	13.1	11.9	2.1	16.7	15.3	2.2	20.3	18.9	2.3	23.4	23.4	2.4	28.9	28.9	2.6	32.5	32.5	2.8						
	1125	7.7	7.1	2.1	10.8	9.9	2.1	13.3	12.2	2.2	16.9	15.3	2.3	20.5	17.9	2.3	23.5	23.5	2.4	29.2	29.2	2.6	32.7	32.7	2.8						
75°F (23.9°C)	875	7.3	6.7	2.1	10.2	9.4	2.2	12.7	11.7	2.3	16.2	14.6	2.3	19.9	17.4	2.4	22.9	22.9	2.5	28.3	28.3	2.8	31.9	31.9	3.0						
	950	7.4	6.8	2.1	10.4	9.5	2.1	12.8	11.8	2.2	16.3	14.8	2.3	20.1	17.6	2.4	23.1	23.1	2.4	28.6	28.6	2.7	32.2	32.2	2.9						
	1125	7.5	6.9	2.1	10.5	9.7	2.2	13.0	12.0	2.3	16.5	15.0	2.3	20.3	17.8	2.4	23.3	23.3	2.5	28.9	28.9	2.7	32.4	32.4	2.9						

Performance Data
36 Cooling Extended Performance Table

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES deg F (C)																	
		75 (23.9)			85 (29.4)			95 (35)			105 (40.6)			115 (46.1)			125 (51.7)		
		Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW
CFM	EWB	Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens	
1050	57 (13.9)	33.6	33.6	2.3	32.4	32.4	2.5	30.9	30.9	2.8	26.2	26.2	3.0	24.3	24.3	3.4	23.2	23.2	3.7
	62 (16.7)	34.9	33.5	2.3	33.3	32.7	2.5	31.8	30.9	2.8	27.0	25.6	3.0	25.0	23.5	3.4	23.9	21.7	3.7
	63* (17.2)	35.6	27.0	2.3	34.0	26.1	2.5	32.1	25.3	2.8	26.9	21.7	3.0	24.7	20.7	3.4	23.1	20.2	3.7
	67 (19.4)	38.3	28.2	2.3	36.5	27.2	2.6	34.5	26.3	2.9	28.9	22.6	3.0	26.5	21.6	3.4	24.8	21.1	3.7
	72 (22.2)	41.7	22.5	2.4	39.8	21.5	2.6	37.7	20.7	2.9	31.6	17.7	3.0	28.9	16.6	3.5	27.0	16.0	3.8
1150	57 (13.9)	33.7	33.7	2.3	32.6	32.6	2.6	31.0	30.8	2.9	26.4	25.5	3.0	24.4	23.4	3.5	23.3	21.6	3.7
	62 (16.7)	34.1	33.4	2.3	32.6	32.5	2.6	31.1	30.8	2.9	26.4	25.5	3.0	24.4	23.4	3.5	23.3	21.6	3.7
	63* (17.2)	34.5	26.9	2.3	32.9	26.0	2.6	31.1	25.2	2.9	26.1	21.6	3.0	23.9	20.6	3.5	22.4	20.1	3.7
	67 (19.4)	37.1	28.0	2.4	35.4	27.1	2.6	33.4	26.2	2.9	28.1	22.5	3.0	25.7	21.5	3.5	24.0	21.0	3.7
1350	72 (22.2)	40.4	22.4	2.4	38.6	21.4	2.6	36.5	20.6	2.9	30.6	17.6	3.1	28.0	16.5	3.5	26.2	15.9	3.8
	57 (13.9)	36.4	36.4	2.4	35.2	35.2	2.6	33.5	33.5	2.9	28.5	28.4	3.1	26.4	26.1	3.5	25.2	24.1	3.8
	62 (16.7)	36.8	36.8	2.4	35.2	35.2	2.6	33.5	33.5	2.9	28.5	28.4	3.1	26.4	26.1	3.5	25.2	24.1	3.8
	63* (17.2)	37.2	30.0	2.4	35.6	29.0	2.6	33.6	28.0	2.9	28.2	24.1	3.1	25.8	23.0	3.5	24.2	22.4	3.8
	67 (19.4)	40.0	31.3	2.4	38.2	30.2	2.7	36.1	29.2	2.9	30.3	25.1	3.1	27.8	24.0	3.5	26.0	23.4	3.8
1350	72 (22.2)	43.6	25.0	2.5	41.7	23.9	2.7	39.4	23.0	3.0	33.0	19.6	3.1	30.3	18.4	3.6	28.3	17.8	3.8

* At 75°F (23.9 °C) entering dry bulb—Tennessee Valley Authority [TVA] rating conditions; all others at 80°F (26.7 °C) entering dry bulb. See Legend and Notes.

36 Heating Extended Performance Table -10-60°F (-23.3-15.6°C)

INDOOR AIR		OUTDOOR COIL ENTERING AIR TEMPERATURES°F (°C)																							
		-10 (-23.3)			0 (-17.8)			10 (-12.2)			20 (-6.7)			30 (-1.1)			40 (4.4)			50 (10)			60 (15.6)		
EDB °F (°C)	CFM	Capacity MBtuh		Total Sys	Capacity MBtuh		Total Sys	Capacity MBtuh		Total Sys	Capacity MBtuh		Total Sys	Capacity MBtuh		Total Sys	Capacity MBtuh		Total Sys	Capacity MBtuh		Total Sys	Capacity MBtuh		Total Sys
		Total	Integ	KW	Total	Integ	KW	Total	Integ	KW	Total	Integ	KW	Total	Integ	KW	Total	Integ	KW	Total	Integ	KW	Total	Integ	KW
65°F (18.3°C)	1050	8.9	8.2	2.1	12.9	11.8	2.1	16.1	14.8	2.2	21.5	19.4	2.3	26.1	22.9	2.4	30.1	30.1	2.4	37.2	37.2	2.6	41.9	41.9	2.8
	1150	9.0	8.3	2.1	13.0	12.0	2.1	16.3	15.0	2.2	21.7	19.6	2.3	26.4	23.1	2.3	30.4	30.4	2.4	37.6	37.6	2.6	42.3	42.3	2.7
	1350	9.3	8.5	2.2	13.2	12.2	2.2	16.5	15.2	2.3	21.9	19.8	2.4	26.6	23.3	2.4	30.6	30.6	2.5	38.0	38.0	2.7	42.5	42.5	2.8
70°F (21.1°C)	1050	8.7	8.0	2.2	12.5	11.5	2.2	15.7	14.4	2.3	20.9	18.9	2.4	25.4	22.3	2.5	29.3	29.3	2.5	36.2	36.2	2.7	40.8	40.8	2.9
	1150	8.8	7.8	2.1	12.7	11.4	2.2	15.8	14.4	2.3	21.1	19.4	2.4	25.7	23.9	2.4	29.6	29.6	2.5	36.6	36.6	2.7	41.2	41.2	2.9
	1350	9.0	8.3	2.2	12.9	11.9	2.3	16.1	14.8	2.4	21.3	19.3	2.4	25.9	22.7	2.5	29.8	29.8	2.6	37.0	37.0	2.8	41.4	41.4	2.9
75°F (23.9°C)	1050	8.5	7.8	2.3	12.3	11.3	2.3	15.4	14.1	2.4	20.5	18.5	2.5	25.2	22.1	2.6	29.0	29.0	2.6	35.9	35.9	2.8	40.4	40.4	3.0
	1150	8.6	7.9	2.2	12.4	11.4	2.3	15.5	14.3	2.4	20.7	18.7	2.5	25.4	22.3	2.5	29.3	29.3	2.6	36.2	36.2	2.8	40.8	40.8	3.0
	1350	8.8	8.1	2.3	12.6	11.6	2.4	15.7	14.5	2.5	20.9	18.9	2.5	25.7	22.5	2.6	29.5	29.5	2.7	36.6	36.6	2.9	41.0	41.0	3.0

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

Performance Data
42 Cooling Extended Performance Table

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES deg F (C)																	
		75 (23.9)			85 (29.4)			95 (35)			105 (40.6)			115 (46.1)			125 (51.7)		
		Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW
CFM	EWB	Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens	
1225	57 (13.9)	42.0	42.0	2.8	40.5	40.5	3.1	38.6	38.6	3.5	34.8	34.8	3.9	32.8	32.8	4.2	31.0	31.0	4.5
	62 (16.7)	43.6	39.7	2.8	41.6	38.7	3.1	39.7	36.6	3.5	35.7	33.4	3.9	33.7	30.6	4.2	31.9	27.9	4.5
	63* (17.2)	44.5	32.0	2.8	42.5	30.9	3.1	40.1	29.9	3.5	35.6	28.4	3.9	33.2	26.9	4.2	30.8	26.0	4.5
	67 (19.4)	47.8	33.3	2.9	45.6	32.2	3.2	43.1	31.1	3.5	38.3	29.6	3.9	35.7	28.0	4.2	33.2	27.1	4.5
	72 (22.2)	52.1	26.7	2.9	49.8	25.5	3.2	47.1	24.5	3.5	41.8	23.1	3.9	39.0	21.6	4.3	36.1	20.6	4.5
1350	57 (13.9)	42.4	41.4	2.9	41.0	39.1	3.2	39.0	36.7	3.5	35.1	33.5	3.9	33.1	30.6	4.3	31.4	28.0	4.5
	62 (16.7)	42.9	39.7	2.9	41.0	38.8	3.2	39.1	36.7	3.5	35.1	33.5	3.9	33.1	30.6	4.3	31.4	28.0	4.5
	63* (17.2)	43.4	32.0	2.9	41.4	31.0	3.2	39.1	30.0	3.5	34.8	28.5	3.9	32.4	27.0	4.3	30.1	26.1	4.5
	67 (19.4)	46.6	33.4	2.9	44.5	32.3	3.2	42.0	31.2	3.6	37.4	29.6	3.9	34.9	28.1	4.3	32.3	27.1	4.5
	72 (22.2)	50.8	26.7	2.9	48.5	25.5	3.2	45.9	24.6	3.6	40.7	23.1	4.0	38.0	21.6	4.3	35.3	20.6	4.6
1575	57 (13.9)	45.5	45.5	3.0	44.0	43.3	3.2	41.9	40.6	3.6	37.7	37.1	4.0	35.5	33.9	4.3	33.7	31.0	4.6
	62 (16.7)	46.0	44.5	3.0	44.0	42.9	3.2	41.9	40.6	3.6	37.7	37.1	4.0	35.5	33.9	4.3	33.7	31.0	4.6
	63* (17.2)	46.5	35.5	3.0	44.4	34.4	3.2	42.0	33.2	3.6	37.3	31.5	4.0	34.8	29.9	4.3	32.3	28.9	4.6
	67 (19.4)	50.0	37.0	3.0	47.8	35.8	3.3	45.1	34.6	3.6	40.1	32.9	4.0	37.4	31.1	4.3	34.7	30.1	4.6
	72 (22.2)	54.5	29.6	3.0	52.1	28.3	3.3	49.3	27.2	3.7	43.7	25.6	4.1	40.8	24.0	4.4	37.8	22.9	4.7

* At 75°F (23.9 °C) entering dry bulb—Tennessee Valley Authority [TVA] rating conditions; all others at 80°F (26.7 °C) entering dry bulb. See Legend and Notes.

42 Heating Extended Performance Table -10-60°F (-23.3-15.6°C)

INDOOR AIR		OUTDOOR COIL ENTERING AIR TEMPERATURES °F (°C)																													
		-10 (-23.3)				0 (-17.8)				10 (-12.2)				20 (-6.7)				30 (-1.1)				40 (4.4)				50 (10)				60 (15.6)	
EDB °F (°C)	CFM	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW			
		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ	
65°F (18.3°C)	1225	10.5	9.7	2.5	15.2	14.0	2.6	19.0	17.5	2.7	25.3	22.9	2.8	30.8	27.0	2.9	35.4	35.4	2.9	43.9	43.9	3.2	49.4	49.4	3.4						
	1350	10.7	9.8	2.5	15.3	14.1	2.6	19.2	17.6	2.7	25.6	23.1	2.7	31.1	27.3	2.8	35.8	35.8	2.9	44.3	44.3	3.2	49.9	49.9	3.4						
	1575	10.9	10.0	2.6	15.6	14.3	2.7	19.4	17.9	2.8	25.8	23.4	2.8	31.4	27.5	2.9	36.0	36.0	3.0	44.8	44.8	3.2	50.1	50.1	3.4						
70°F (21.1°C)	1225	10.3	9.4	2.6	14.8	13.6	2.7	18.5	17.0	2.8	24.6	22.3	2.9	30.0	26.3	3.0	34.5	34.5	3.1	42.7	42.7	3.4	48.1	48.1	3.6						
	1350	10.4	9.2	2.6	14.9	13.4	2.7	18.7	17.0	2.8	24.9	22.9	2.9	30.3	28.2	2.9	34.9	34.9	3.0	43.2	43.2	3.3	48.6	48.6	3.5						
	1575	10.6	9.8	2.7	15.2	14.0	2.8	18.9	17.4	2.9	25.1	22.8	3.0	30.5	26.8	3.0	35.1	35.1	3.1	43.6	43.6	3.4	48.8	48.8	3.6						
75°F (23.9°C)	1225	10.1	9.2	2.7	14.5	13.3	2.8	18.1	16.7	2.9	24.1	21.9	3.0	29.7	26.0	3.1	34.2	34.2	3.2	42.3	42.3	3.5	47.6	47.6	3.7						
	1350	10.2	9.4	2.7	14.6	13.5	2.8	18.3	16.8	2.9	24.4	22.1	3.0	30.0	26.3	3.1	34.5	34.5	3.1	42.7	42.7	3.4	48.1	48.1	3.7						
	1575	10.4	9.6	2.8	14.9	13.7	2.9	18.5	17.1	3.0	24.6	22.3	3.1	30.2	26.5	3.1	34.8	34.8	3.2	43.2	43.2	3.5	48.3	48.3	3.7						

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

Performance Data
48 Cooling Extended Performance Table

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES deg F																			
		75 (23.9)			85 (29.4)			95 (35)			105 (40.6)			115 (46.1)			125 (51.7)				
CFM	EWB	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW		
		Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens			
1400	57 (13.9)	46.2	46.2	3.2	44.6	44.6	3.5	42.5	42.5	3.9	37.9	37.9	4.5	34.8	34.8	4.9	32.4	32.4	5.2		
	62 (16.7)	48.0	44.4	3.2	45.9	43.3	3.5	43.7	40.9	3.9	38.9	37.0	4.5	35.8	33.4	4.9	33.3	29.4	5.2		
	63* (17.2)	49.0	35.8	3.2	46.8	34.6	3.5	44.2	33.4	3.9	38.8	31.4	4.5	35.3	29.4	4.9	32.2	27.4	5.2		
	67 (19.4)	52.7	37.3	3.3	50.3	36.1	3.6	47.5	34.8	4.0	41.8	32.8	4.5	38.0	30.7	4.9	34.6	28.6	5.2		
	72 (22.2)	57.4	29.8	3.3	54.8	28.5	3.6	51.9	27.4	4.0	45.5	25.5	4.6	41.4	23.6	4.9	37.8	21.7	5.3		
1600	57 (13.9)	48.5	48.0	3.3	46.8	45.3	3.6	44.6	42.5	4.0	39.7	38.5	4.6	36.5	34.7	5.0	34.0	30.6	5.3		
	62 (16.7)	49.0	46.1	3.3	46.8	45.0	3.6	44.6	42.5	4.0	39.7	38.5	4.6	36.5	34.7	5.0	34.0	30.6	5.3		
	63* (17.2)	49.6	37.2	3.3	47.3	36.0	3.6	44.7	34.8	4.0	39.3	32.7	4.6	35.7	30.6	5.0	32.6	28.5	5.3		
	67 (19.4)	53.3	38.7	3.3	50.9	37.5	3.6	48.0	36.2	4.1	42.2	34.0	4.6	38.4	31.9	5.0	35.0	29.7	5.3		
1800	72 (22.2)	58.1	31.0	3.4	55.5	29.6	3.7	52.5	28.5	4.1	46.0	26.5	4.6	41.9	24.5	5.0	38.2	22.6	5.3		
	57 (13.9)	50.2	50.2	3.4	48.4	48.4	3.7	46.2	45.5	4.1	41.1	41.1	4.7	37.8	37.1	5.0	35.2	32.7	5.3		
	62 (16.7)	50.7	49.8	3.4	48.4	48.1	3.7	46.2	45.5	4.1	41.1	41.1	4.7	37.8	37.1	5.0	35.2	32.7	5.3		
	63* (17.2)	51.3	39.7	3.4	49.0	38.4	3.7	46.3	37.1	4.1	40.7	34.9	4.7	37.0	32.7	5.0	33.7	30.5	5.3		
	67 (19.4)	55.1	41.4	3.4	52.7	40.0	3.7	49.7	38.7	4.1	43.7	36.4	4.7	39.7	34.0	5.0	36.3	31.7	5.3		
	72 (22.2)	60.1	33.1	3.4	57.4	31.6	3.7	54.3	30.4	4.2	47.7	28.4	4.7	43.3	26.2	5.1	39.5	24.1	5.4		

* At 75°F (23.9 °C) entering dry bulb—Tennessee Valley Authority [TVA] rating conditions; all others at 80°F (26.7 °C) entering dry bulb. See Legend and Notes.

48 Heating Extended Performance Table -10-60°F (-23.3-15.6°C)

INDOOR AIR		OUTDOOR COIL ENTERING AIR TEMPERATURES °F (°C)																				
		-10 (-23.3)			0 (-17.8)			10 (-12.2)			20 (-6.7)			30 (-1.1)			40 (4.4)			50 (10)		
EDB	CFM	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW	Capacity MBtuh		Total Sys KW
		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ		Total	Integ	
65°F (18.3°C)	1400	12.2	11.2	2.7	15.4	14.2	2.7	21.3	19.6	2.8	26.4	23.9	2.9	27.0	23.7	3.0	33.0	33.0	3.1	48.1	48.1	3.4
	1600	12.3	11.3	2.7	15.6	14.4	2.8	21.6	19.8	2.9	26.7	24.2	3.0	27.3	23.9	3.1	33.4	33.4	3.2	48.6	48.6	3.4
	1800	12.5	11.5	2.8	15.8	14.6	2.9	21.8	20.0	3.0	26.9	24.4	3.0	27.5	24.1	3.1	33.6	33.6	3.2	49.1	49.1	3.5
70°F (21.1°C)	1400	11.9	10.9	2.8	15.0	13.8	2.8	20.8	19.1	3.0	25.7	23.3	3.1	26.3	23.1	3.2	32.2	32.2	3.3	46.8	46.8	3.6
	1600	12.0	10.7	2.8	15.2	13.7	2.9	21.0	19.1	3.0	26.0	23.9	3.1	26.6	24.7	3.2	32.5	32.5	3.3	47.3	47.3	3.6
	1800	12.2	11.2	2.9	15.4	14.2	3.0	21.2	19.5	3.1	26.2	23.7	3.2	26.8	23.5	3.3	32.7	32.7	3.3	47.8	47.8	3.6
75°F (23.9°C)	1400	11.6	10.7	2.9	14.7	13.6	3.0	20.4	18.7	3.1	25.2	22.8	3.2	26.1	22.8	3.3	31.8	31.8	3.4	46.4	46.4	3.7
	1600	11.8	10.8	2.9	14.9	13.7	3.0	20.6	18.9	3.1	25.5	23.1	3.2	26.3	23.1	3.3	32.2	32.2	3.4	46.8	46.8	3.7
	1800	12.0	11.0	3.0	15.1	13.9	3.1	20.8	19.1	3.2	25.7	23.3	3.3	26.6	23.3	3.4	32.4	32.4	3.5	47.3	47.3	3.8

Performance Table
60 Cooling Extended Performance Table

EVAPORATOR AIR		CONDENSER ENTERING AIR TEMPERATURES deg F (C)																	
		75 (23.9)			85 (29.4)			95 (35)			105 (40.6)			115 (46.1)			125 (51.7)		
		Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW	Capacity MBtuh		Total System KW
CFM	EWB	Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens		Total	Sens	
1600	57 (13.9)	55.4	55.4	4.0	53.5	53.5	4.3	50.9	50.9	4.8	41.2	41.2	5.5	39.3	39.3	5.8	37.2	37.2	6.1
	62 (16.7)	57.5	51.7	4.0	54.9	50.4	4.3	52.4	47.7	4.8	42.4	39.9	5.5	40.4	37.6	5.8	38.2	35.9	6.1
	63* (17.2)	58.7	41.7	4.0	56.0	40.3	4.3	52.9	38.9	4.8	42.3	33.9	5.5	39.9	33.1	5.8	37.0	33.5	6.1
	67 (19.4)	63.1	43.4	4.0	60.2	42.0	4.4	56.8	40.6	4.9	45.5	35.3	5.5	42.9	34.5	5.8	39.8	34.9	6.1
	72 (22.2)	68.7	34.7	4.0	65.7	33.2	4.4	62.1	31.9	4.9	49.5	27.5	5.6	46.8	26.6	5.9	43.4	26.5	6.2
1750	57 (13.9)	55.6	53.5	4.0	53.6	50.5	4.4	51.1	47.4	4.9	41.4	39.7	5.5	39.4	37.4	5.9	37.3	35.7	6.2
	62 (16.7)	56.2	51.4	4.0	53.6	50.1	4.4	51.2	47.4	4.9	41.4	39.7	5.5	39.4	37.4	5.9	37.3	35.7	6.2
	63* (17.2)	56.8	41.4	4.0	54.2	40.1	4.4	51.2	38.7	4.9	40.9	33.7	5.5	38.6	32.9	5.9	35.8	33.3	6.2
	67 (19.4)	61.1	43.2	4.0	58.3	41.8	4.4	55.0	40.3	4.9	44.0	35.1	5.5	41.5	34.3	5.9	38.5	34.7	6.2
2000	72 (22.2)	66.5	34.5	4.1	63.5	33.0	4.5	60.1	31.7	5.0	48.0	27.4	5.6	45.3	26.4	5.9	42.0	26.4	6.2
	57 (13.9)	58.4	58.1	4.1	56.4	54.9	4.5	53.7	51.5	5.0	43.5	43.1	5.6	41.5	40.6	6.0	39.3	38.8	6.2
	62 (16.7)	59.1	56.4	4.1	56.4	54.4	4.5	53.8	51.5	5.0	43.5	43.1	5.6	41.5	40.6	6.0	39.3	38.8	6.2
	63* (17.2)	59.7	45.0	4.1	57.0	43.5	4.5	53.8	42.0	5.0	43.0	36.6	5.6	40.6	35.7	6.0	37.6	36.2	6.2
	67 (19.4)	64.2	46.9	4.1	61.3	45.3	4.5	57.8	43.8	5.0	46.3	38.1	5.6	43.7	37.2	6.0	40.5	37.7	6.2
	72 (22.2)	70.0	37.5	4.2	66.8	35.8	4.6	63.2	34.5	5.1	50.4	29.7	5.7	47.6	28.7	6.0	44.1	28.6	6.3

* At 75°F (23.9 °C) entering dry bulb—Tennessee Valley Authority [TVA] rating conditions; all others at 80°F (26.7 °C) entering dry bulb. See Legend and Notes.

60 Heating Extended Performance Table -10-60°F (-23.3-15.6°C)

INDOOR AIR		OUTDOOR COIL ENTERING AIR TEMPERATURE																													
		-10°F (-23.3°C)				0°F (-17.8°C)				10°F (-12.2°C)				20°F (-6.7°C)				30°F (-1.1°C)				40°F (4.4°C)				50°F (8.3°C)				60°F (15.6°C)	
EDB	CFM	Capacity (Mbtuh)		Total Sys	Capacity (Mbtuh)		Total Sys	Capacity (Mbtuh)		Total Sys	Capacity (Mbtuh)		Total Sys	Capacity (Mbtuh)		Total Sys	Capacity (Mbtuh)		Total Sys	Capacity (Mbtuh)		Total Sys	Capacity (Mbtuh)		Total Sys	Capacity (Mbtuh)		Total Sys			
		Total	Integ	kW	Total	Integ	kW	Total	Integ	kW	Total	Integ	kW	Total	Integ	kW	Total	Integ	kW	Total	Integ	kW	Total	Integ	kW	Total	Integ	kW			
65°F (18.3°C)	1600	15.1	13.8	3.61	21.4	19.7	3.71	27.9	25.7	3.85	32.0	29.0	3.99	32.2	28.2	4.11	41.7	41.7	4.23	60.3	60.3	4.63	67.8	67.8	4.94						
	1750	15.2	14.0	3.57	21.7	19.9	3.66	28.2	26.0	3.80	32.4	29.3	3.93	32.6	28.5	4.04	42.1	42.1	4.15	60.9	60.9	4.53	68.5	68.5	4.82						
	2000	15.5	14.3	3.65	21.9	20.2	3.74	28.5	26.2	3.87	32.6	29.5	3.99	32.8	28.8	4.10	42.4	42.4	4.21	61.5	61.5	4.57	68.8	68.8	4.84						
70°F (21.1°C)	1600	14.7	13.5	3.77	20.9	19.2	3.87	27.2	25.0	4.02	31.2	28.2	4.17	31.4	27.5	4.29	40.6	40.6	4.41	58.7	58.7	4.83	66.0	66.0	5.15						
	1750	14.8	13.2	3.72	21.1	19.0	3.82	27.5	25.0	3.96	31.5	29.0	4.09	31.7	23.1	4.21	41.0	41.0	4.33	59.3	59.3	4.72	66.7	66.7	5.03						
	2000	15.1	13.9	3.80	21.4	19.7	3.88	27.8	25.6	4.02	31.8	28.8	4.15	32.0	28.0	4.26	41.3	41.3	4.37	59.9	59.9	4.75	67.0	67.0	5.03						
75°F (23.9°C)	1600	14.4	13.2	3.93	20.4	18.8	4.03	26.7	24.5	4.19	30.5	27.6	4.34	31.1	27.2	4.47	40.2	40.2	4.60	58.1	58.1	5.03	65.3	65.3	5.37						
	1750	14.5	13.4	3.87	20.7	19.0	3.97	27.0	24.8	4.11	30.9	27.9	4.26	31.4	27.5	4.38	40.6	40.6	4.50	58.7	58.7	4.91	66.0	66.0	5.23						
	2000	14.8	13.6	3.94	20.9	19.3	4.03	27.2	25.0	4.17	31.1	28.2	4.30	31.7	27.7	4.42	40.9	40.9	4.53	59.3	59.3	4.93	66.3	66.3	5.22						

Manufacturer reserves the right to change, at any time, specifications and designs without notice and without obligations.

Performance Data (Continued)

LEGEND

- BF — Bypass Factor
- edb — Entering Dry-Bulb
- Ewb — Entering Wet-Bulb
- kW — Total Unit Power Input
- SHC — Sensible Heat Capacity (1000 Btuh)
- TC — Total Capacity (1000 Btuh) (net)
- rh —Relative Humidity

COOLING NOTES:

- 1.Ratings are net; they account for the effects of the evaporator-fan motor power and heat.
- 2.Direct interpolation is permissible. Do not extrapolate.
- 3.The following formulas may be used:

$$t_{ldb} = t_{edb} - \frac{\text{Sensible capacity (Btuh)}}{1.10 \times \text{CFM}}$$

$$t_{lwb} = \text{Wet-bulb temperature corresponding to enthalpy air leaving evaporator coil (} t_{lwb} \text{)}$$

$$h_{lwb} = h_{ewb} - \frac{\text{total capacity (Btuh)}}{(4.5 \times \text{CFM})}$$

Where: h_{ewb} = Enthalpy of air entering evaporator coil

- 4.The SHC is based on 80°F (26.6°C) edb temperature of air entering evaporator coil. Below 80°F (26.6°C) edb, subtract (corr factor x CFM) from SHC. Above 80°F (26.6°C) edb, add (corr factor x CFM) to SHC.
Correction Factor = 1.10 x (1 + BF) x (edb - 80).
- 5.Integrated capacity is maximum (instantaneous) capacity less the effect of frost on the outdoor coil and the heat required to defrost it.

Multiplication Factors

HEATER VOLT RATING	VOLTAGE DISTRIBUTION	MULTIPLICATION FACTOR
240	200	0.69
	208	0.75
	230	0.92
	240	1.00
480	460	0.92

Dry Coil Air Delivery* - Horizontal and Downflow Discharge Sizes 24-60

Unit Size	Motor Speed	Tap	ESP (in. W.C.)										
				0.1	0.2	0.3	0.4	0.5	0.6	0.7	0.8	0.9	1
24	Low	Blue	CFM	723	563	308	---	---	---	---	---	---	---
			BHP	0.09	0.07	0.06	---	---	---	---	---	---	---
	Med-Low	Pink	CFM	829	766	696	606	538	470	406	341	283	220
			BHP	0.11	0.12	0.12	0.13	0.13	0.14	0.14	0.15	0.15	0.16
	Medium**	Red	CFM	1065	1016	966	914	857	783	716	667	617	566
			BHP	0.19	0.20	0.20	0.21	0.22	0.23	0.23	0.24	0.24	0.25
	Med-High	Orange	CFM	1097	1048	999	949	893	833	751	701	651	603
			BHP	0.21	0.21	0.22	0.22	0.23	0.24	0.25	0.25	0.26	0.26
	High	Black	CFM	1215	1173	1129	1085	1038	989	936	854	803	760
			BHP	0.26	0.27	0.28	0.28	0.29	0.30	0.31	0.32	0.32	0.33
30	Low	Blue	CFM	643	552	455	348	225	---	---	---	---	---
			BHP	0.09	0.10	0.11	0.11	0.11	---	---	---	---	---
	Med-Low	Pink	CFM	817	744	673	597	516	431	325	190	---	---
			BHP	0.14	0.15	0.15	0.16	0.17	0.17	0.18	0.18	---	---
	Medium**	Red	CFM	1159	1104	1045	990	937	878	821	759	693	618
			BHP	0.31	0.32	0.33	0.33	0.34	0.35	0.36	0.37	0.37	0.38
	Med-High	Orange	CFM	1201	1147	1095	1037	987	934	877	818	755	671
			BHP	0.34	0.35	0.36	0.37	0.37	0.38	0.39	0.40	0.41	0.40
	High	Black	CFM	1291	1236	1181	1131	1080	1033	978	909	792	661
			BHP	0.41	0.42	0.43	0.43	0.44	0.45	0.46	0.45	0.43	0.40
36	Low	Blue	CFM	1069	1006	955	896	847	800	755	700	649	598
			BHP	0.16	0.17	0.18	0.19	0.20	0.21	0.22	0.23	0.24	0.24
	Med-Low	Pink	CFM	1154	1100	1045	997	936	886	847	804	749	699
			BHP	0.19	0.20	0.21	0.23	0.24	0.24	0.25	0.26	0.27	0.28
	Medium**	Red	CFM	1295	1247	1199	1152	1104	1050	997	955	918	875
			BHP	0.26	0.27	0.28	0.29	0.30	0.31	0.32	0.33	0.33	0.34
	Med-High	Orange	CFM	1421	1374	1328	1283	1236	1188	1137	1089	1042	1011
			BHP	0.32	0.33	0.35	0.36	0.37	0.38	0.39	0.40	0.41	0.41
	High	Black	CFM	1505	1464	1423	1380	1336	1292	1242	1199	1145	1096
			BHP	0.38	0.39	0.40	0.42	0.43	0.43	0.44	0.45	0.46	0.47
42	Low	Blue	CFM	956	899	843	786	729	676	621	558	504	435
			BHP	0.13	0.13	0.14	0.15	0.16	0.16	0.17	0.18	0.18	0.19
	Med-Low	Pink	CFM	1201	1153	1107	1060	1012	965	917	871	828	782
			BHP	0.21	0.22	0.22	0.23	0.24	0.25	0.26	0.27	0.28	0.29
	Medium**	Red	CFM	1443	1402	1361	1322	1284	1243	1204	1164	1124	1084
			BHP	0.32	0.33	0.34	0.35	0.36	0.37	0.38	0.39	0.40	0.42
	Med-High	Orange	CFM	1529	1491	1451	1411	1376	1338	1300	1261	1223	1185
			BHP	0.37	0.39	0.40	0.41	0.42	0.43	0.44	0.45	0.46	0.47
	High	Black	CFM	1604	1565	1529	1490	1455	1421	1385	1348	1310	1274
			BHP	0.42	0.44	0.45	0.46	0.47	0.48	0.49	0.50	0.51	0.52
48	Low	Blue	CFM	641	551	462	385	289	216	163	115	---	---
			BHP	0.05	0.06	0.06	0.07	0.07	0.08	0.08	0.09	---	---
	Med-Low	Pink	CFM	1437	1395	1351	1307	1265	1221	1176	1132	1084	1039
			BHP	0.29	0.30	0.31	0.32	0.33	0.34	0.35	0.36	0.37	0.38
	Medium**	Red	CFM	1771	1735	1699	1664	1627	1592	1557	1522	1486	1450
			BHP	0.51	0.52	0.53	0.55	0.56	0.57	0.58	0.59	0.61	0.62
	Med-High	Orange	CFM	1928	1897	1862	1830	1796	1764	1732	1698	1620	1512
			BHP	0.64	0.65	0.67	0.68	0.69	0.71	0.72	0.73	0.71	0.66
	High	Black	CFM	2212	2167	2124	2061	1976	1892	1794	1699	1567	1438
			BHP	0.97	0.99	1.00	0.97	0.95	0.91	0.86	0.82	0.77	0.71
60	Low	Blue	CFM	641	551	462	385	289	216	163	115	---	---
			BHP	0.05	0.06	0.06	0.07	0.07	0.08	0.08	0.09	---	---
	Med-Low	Pink	CFM	1437	1395	1351	1307	1265	1221	1176	1132	1084	1039
			BHP	0.29	0.30	0.31	0.32	0.33	0.34	0.35	0.36	0.37	0.38
	Medium**	Red	CFM	1914	1881	1848	1814	1780	1748	1716	1681	1619	1512
			BHP	0.62	0.64	0.65	0.67	0.68	0.69	0.71	0.72	0.71	0.66
	Med-High	Orange	CFM	1928	1897	1862	1830	1796	1764	1732	1698	1620	1512
			BHP	0.64	0.65	0.67	0.68	0.69	0.71	0.72	0.73	0.71	0.66
	High	Black	CFM	2212	2167	2124	2061	1976	1892	1794	1699	1567	1438
			BHP	0.97	0.99	1.00	0.97	0.95	0.91	0.86	0.82	0.77	0.71

Shaded areas indicate speed/static combinations that are not permitted for dehumidification speed.

* Air delivery values are without air filter and are for dry coil (See Wet Coil Pressure Drop Table).

** Factory-shipped cooling speed

NOTE: Deduct field-supplied air filter pressure drop and wet coil pressure drop to obtain external static pressure available for ducting.

Filter Pressure Drop Table (IN. W.C.)

Filter Size in. (mm)	Cooling Tons	Standard CFM (SCFM)																
		600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
600-1400 CFM 12x20x1+12x20x1 (305x508x25+305x508x25)	2.0, 2.5	0.03	0.04	0.05	0.06	0.06	0.07	0.07	0.08	0.08	-	-	-	-	-	-	-	-
1200-1800CFM 16x24x1+14x24x1 (406x610x25+356x610x25)	3.5	-	-	-	-	0.04	0.05	0.06	0.07	0.08	0.09	0.09	0.10	0.11	0.12	0.12	-	-
1500-2200CFM 16x24x1+18x24x1 (406x610x25+457x610x25)	3.0, 4.0, 5.0	-	-	-	-	-	-	-	-	-	0.04	0.06	0.08	0.10	0.11	0.13	0.14	0.15

Wet Coil Pressure Drop (IN. W.C.)

Unit Size	Standard CFM (SCFM)																
	600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
24	0.03	0.04	0.04	0.05	0.06												
30				0.05	0.06	0.07	0.08	0.11									
36				0.06	0.06	0.09	0.10	0.11	0.14								
42					0.05	0.05	0.06	0.07	0.08	0.08	0.09	0.09	0.11				
48							0.04	0.06	0.09	0.10	0.10	0.11	0.12	0.13	0.14		
48, 60									0.05	0.06	0.07	0.07	0.08	0.09	0.10	0.12	0.13

Economizer with 1-in. Filter Pressure Drop (IN. W.C.)

Filter Size in. (mm)	Cooling Tons	Standard CFM (SCFM)																
		600	700	800	900	1000	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200
600-1400 CFM 12x20x1+12x20x1 (305x508x25+305x508x25)	2.0, 2.5	-	-	0.08	0.09	0.10	0.11	0.11	0.13	0.14	-	-	-	-	-	-	-	-
1200-1800CFM 16x24x1+14x24x1 (406x610x25+356x610x25)	3.5	-	-	-	-	-	0.09	0.09	0.10	0.12	0.13	0.15	0.17	0.17	0.19	0.21	-	-
1500-2200CFM 16x24x1+18x24x1 (406x610x25+457x610x25)	3.0, 4.0, 5.0	-	-	-	-	-	-	-	-	-	0.15	0.17	0.18	0.20	0.21	0.22	0.23	0.23


Electric Heat Pressure Drop Table (IN. W.C.)**Small Cabinet: 24-30**

STATIC	STANDARD CFM (SCFM)											
	500	600	700	800	900	1000	1100	1200	1300	1400	1500	1600
5kw	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.07
7.5 kw	0.00	0.00	0.00	0.00	0.00	0.00	0.02	0.03	0.05	0.07	0.08	0.09
10 kw	0.00	0.00	0.00	0.00	0.00	0.02	0.04	0.06	0.07	0.09	0.10	0.11
15 kw	0.00	0.00	0.00	0.02	0.04	0.06	0.08	0.10	0.12	0.14	0.16	0.18
20 kw	0.00	0.00	0.02	0.04	0.06	0.08	0.09	0.11	0.13	0.15	0.17	0.19

Electric Heat Pressure Drop Table (IN. W.C.)**Large Cabinet 36-60**

STATIC	STANDARD CFM (SCFM)														
	1100	1200	1300	1400	1500	1600	1700	1800	1900	2000	2100	2200	2300	2400	2500
5kw	0.00	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12
7.5 kw	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13
10 kw	0.00	0.00	0.01	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13
15 kw	0.00	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.14	0.15
20 kw	0.02	0.03	0.04	0.05	0.06	0.07	0.08	0.09	0.10	0.11	0.12	0.13	0.14	0.15	0.16

Typical Piping and Wiring

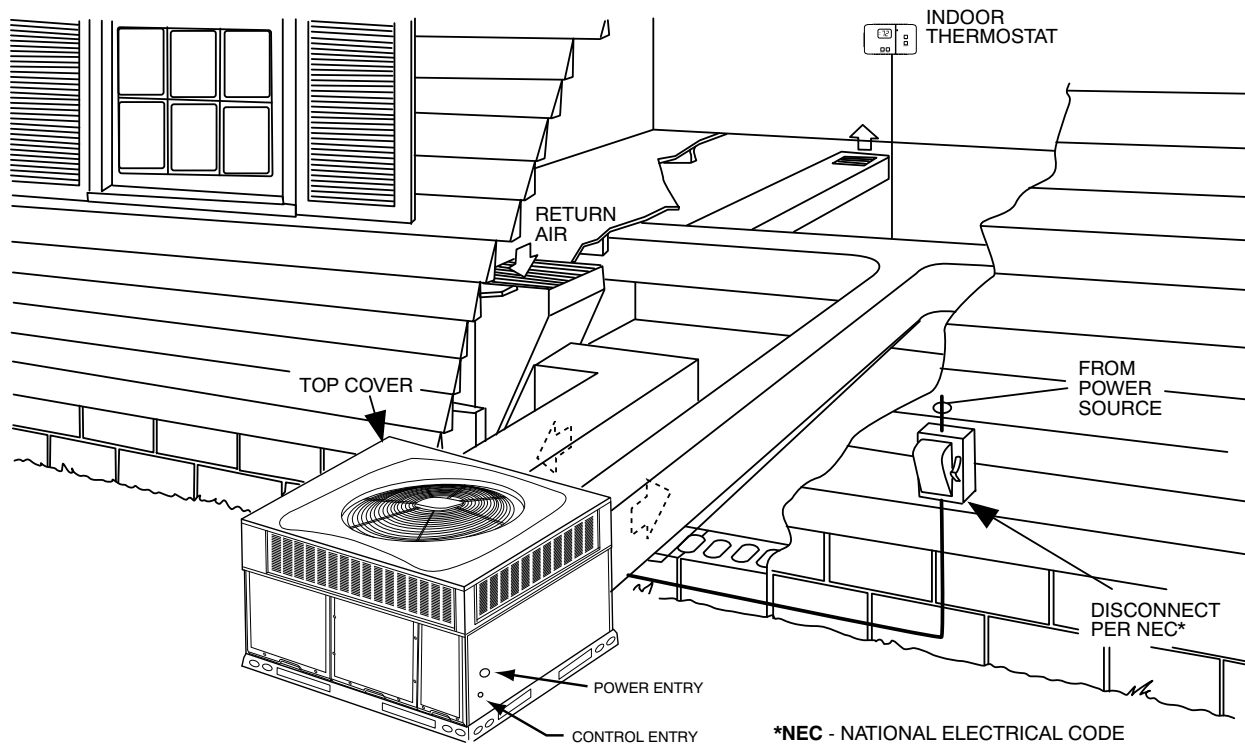

A09238

Application Data

Condensate trap — A 2-in. (51 mm) condensate trap must be field supplied.

Ductwork — Secure downflow discharge ductwork to roof curb. For horizontal discharge applications, attach ductwork to unit with flanges.

To convert a unit to downflow discharge — Units are equipped with factory-installed inserts in the downflow openings. Removal of the inserts is similar to removing an electrical knock-out. Units installed in horizontal discharge orientation do not require duct covers.

Maximum cooling airflow — To minimize the possibility of condensate blow-off from the evaporator, airflow through the units should not exceed 450 CFM per ton.


Minimum cooling airflow — Minimum cooling airflow is 350 CFM per ton in cooling mode. Airflow can be lower in certain modes when humidity removal is an issue however, low airflow could result in indoor coil freezing and/or refrigerant floodback.

Minimum ambient cooling operation temperature — All standard units have a minimum ambient cooling operating temperature of 40°F (4.4°C). With accessory low ambient temperature kit, units can operate at temperatures down to 0°F (17.8°C).

Maximum operating outdoor air temperature for cooling is 125°F (51.7°C).

Balance Point Worksheet

BALANCE POINT WORKSHEET

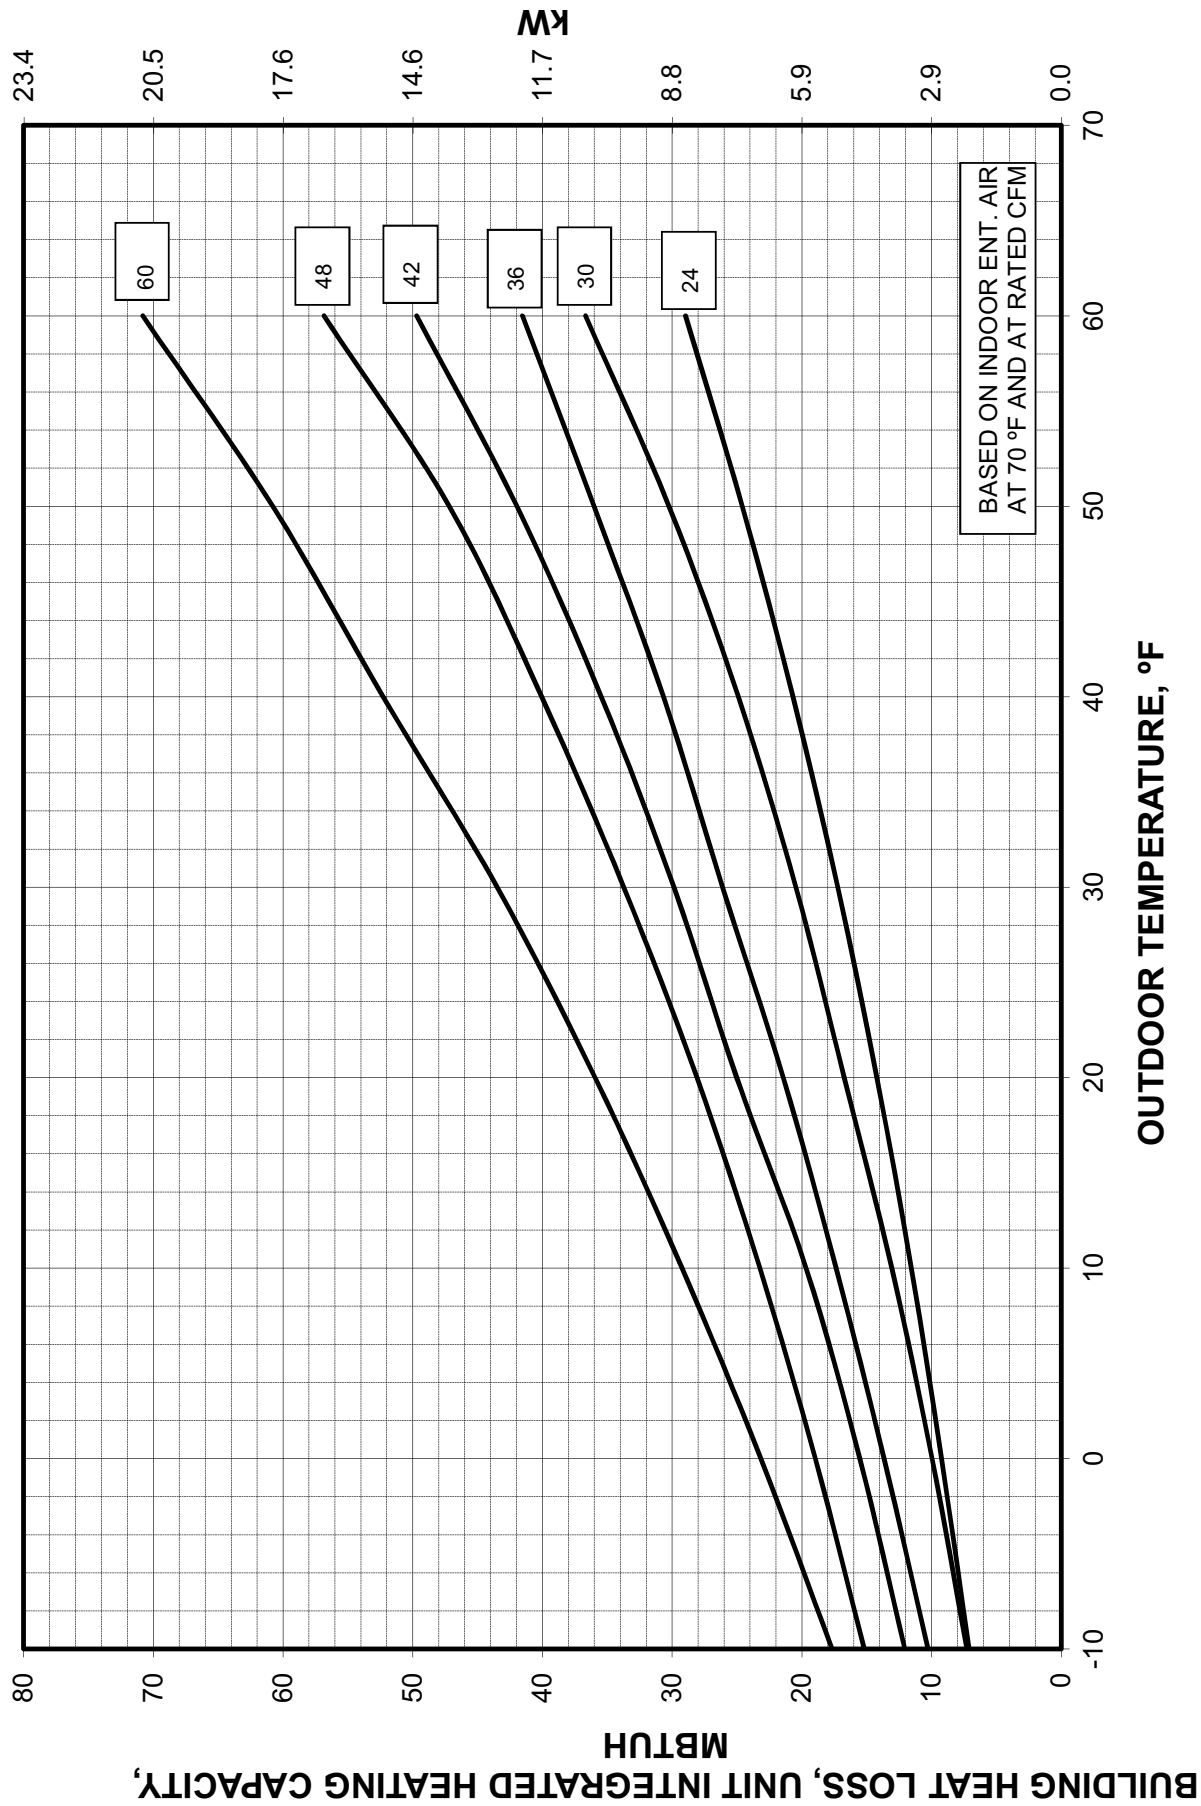

A150725

Electrical Data

MODEL	NOMINAL V-PH-HZ	VOLTAGE RANGE		COMPRESSOR		OFM	IFM	NOMINAL ELECTRIC HEAT	POWER SUPPLY			
		MIN	MAX	RLA	LRA	FLA	FLA	kW	FLA	MCA	MOCP	
24	208/230-1-60	197	253	11.8	63	0.71	3.9	-/-	-/-	18.9	30	
								3.8/5	18.1/20.8	41.6/45	45/45	
								5.4/7.2	25.9/30	51.3/56.5	60/60	
								7.5/10	36.1/41.7	64.1/71.1	70/80	
30	208/230-1-60	197	253	13.9	67	1.05	3.9	-/-	-/-	22.4	35	
								3.8/5	18.1/20.8	45/48.3	45/50	
								5.4/7.2	25.9/30	54.7/59.8	60/60	
								7.5/10	36.1/41.7	67.5/74.5	70/80	
								11.3/15	54.2/62.5	90.1/100.5	100/110	
36	208/230-1-60	197	253	14.4	86	1.05	3.8	-/-	-/-	22.9	35	
								3.8/5	18.1/20.8	45.5/48.9	50/50	
								5.4/7.2	25.9/30	55.2/60.4	60/70	
								7.5/10	36.1/41.7	68/75	70/80	
								11.3/15	54.2/62.5	90.6/101	100/110	
36	208/230-3-60	197	253	9	70	1.05	3.8	-/-	-/-	16.2	25	
								3.8/5	10.4/12	29.1/31.1	30/35	
								5.4/7.2	20.8/24.1	42.1/46.2	45/50	
								11.3/15	31.2/36.1	55.1/61.2	60/70	
36	460-3-60	414	506	4.1	39	0.53	1.2	-	-	6.8	15	
								10	12	21.9	25	
								15	18	29.4	30	
42	208/230-1-60	197	253	18.1	95	1.05	5.8	-/-	-/-	29.5	45	
								3.8/5	18.1/20.8	52.1/55.5	60/60	
								5.4/7.2	25.9/30	61.9/67	70/70	
								7.5/10	36.1/41.7	74.6/81.6	80/90	
								11.3/15	54.2/62.5	97.2/107.6	100/110	
42	208/230-3-60	197	253	12.2	123	1.05	5.8	15/20	72.2/83.3	119.7/133.6	125/150	
								-/-	-/-	22.2	30	
								3.8/5	10.4/12	35.1/37.1	40/40	
								5.4/7.2	20.8/24.1	48.1/52.2	50/60	
								11.3/15	31.2/36.1	61.1/67.2	70/70	
42	460-3-60	414	506	6.9	60	0.53	1.7	15/20	41.4/47.9	73.9/82	80/90	
								-	-	10.8	15	
								10	12	25.9	30	
								15	18	33.4	35	
48	208/230-1-60	197	253	19.4	102	1.2	6.9	20	24.1	41	45	
								-/-	-/-	32.4	50	
								3.8/5	18.1/20.8	55/58.4	60/60	
								5.4/7.2	25.9/30	64.7/69.9	70/70	
								7.5/10	36.1/41.7	77.5/84.5	80/90	
48	208/230-3-60	197	253	12	123	1.05	6.9	11.3/15	54.2/62.5	100.1/110.5	110/125	
								15/20	72.2/83.3	122.6/136.5	125/150	
								-/-	-/-	23	35	
								3.8/5	10.4/12	36/38	40/40	
								5.4/7.2	20.8/24.1	49/53.1	50/60	
48	460-3-60	414	506	6.3	60	0.53	2.3	11.3/15	31.2/36.1	62/68.1	70/70	
								15/20	41.4/47.9	74.7/82.8	80/90	
								-	-	10.7	15	
								10	12	25.7	30	
60	208/230-1-60	197	253	23.9	148	1.1	6.9	15	18	33.2	35	
								20	24.1	40.8	45	
								-/-	-/-	37.8	60	
								3.8/5	18.1/20.8	60.5/63.9	70/70	
								5.4/7.2	25.9/30	70.3/75.4	80/80	
60	208/230-3-60	197	253	13.1	93	1.05	6.9	7.5/10	36.1/41.7	83/90	90/90	
								11.3/15	54.2/62.5	105.6/116	110/125	
								15/20	72.2/83.3	128.1/142	150/150	
								-/-	-/-	24.4	35	
								3.8/5	10.4/12	37.3/39.3	40/40	
60	460-3-60	414	506	6.6	60	0.53	2.3	5.4/7.2	20.8/24.1	50.3/54.5	60/60	
								11.3/15	31.2/36.1	63.3/69.5	70/70	
								15/20	41.4/47.9	76.1/84.2	80/90	
								-	-	11.1	15	
60	460-3-60	414	506	6.6	60	0.53	2.3	10	12	26.1	30	
								15	18	33.6	35	
								20	24.1	41.2	45	

See Legend and Notes.

LEGEND

FLA - Full Load Amps
 IFM - Indoor Fan Motor
 LRA - Locked Rotor Amps
 MCA - Minimum Circuit Amps
 MOCP - Maximum Over Current Protection
 OFM - Outdoor Fan Motor
 RLA - Rated Load Amps


NOTES:

1. In compliance with NEC (National Electrical Code) requirements for multimotor and combination load equipment (refer to NEC Articles 430 and 440), the overcurrent protective device for the unit shall be Power Supply fuse or circuit breaker.
2. Minimum wire size is based on 60 C copper wire. If other than 60 C wire is used, or if length exceeds wire length in table, determine size from NEC.
3. Unbalanced 3-Phase Supply Voltage
Never operate a motor where a phase imbalance in supply voltage is greater than 2%. Use the following formula to determine the percentage of voltage imbalance

% Voltage imbalance

$$= 100 \times \frac{\text{max voltage deviation from average voltage}}{\text{average voltage}}$$

EXAMPLE: Supply voltage is 230-3-60.



AB = 228 v

BC = 231 v

AC = 227 v

$$\text{Average Voltage} = \frac{228 + 231 + 227}{3}$$

$$= \frac{686}{3}$$

$$= 229$$

Determine maximum deviation from average voltage.

$$(AB) 229 - 228 = 1 \text{ v}$$

$$(BC) 231 - 229 = 2 \text{ v}$$

$$(AC) 229 - 227 = 2 \text{ v}$$

Maximum deviation is 2 v.

Determine percent of voltage imbalance

$$\% \text{ Voltage Imbalance} = 100 \times \frac{2}{229}$$

$$= 0.8\%$$

This amount of phase imbalance is satisfactory as it is below the maximum allowable 2%.


IMPORTANT: If the supply voltage phase imbalance is more than 2%, contact your local electric utility company immediately.

A09604

Typical Connection Wiring Schematic - 208/230-1-60

CONNECTION WIRING DIAGRAM


DANGER: ELECTRICAL SHOCK HAZARD DISCONNECT POWER BEFORE SERVICING

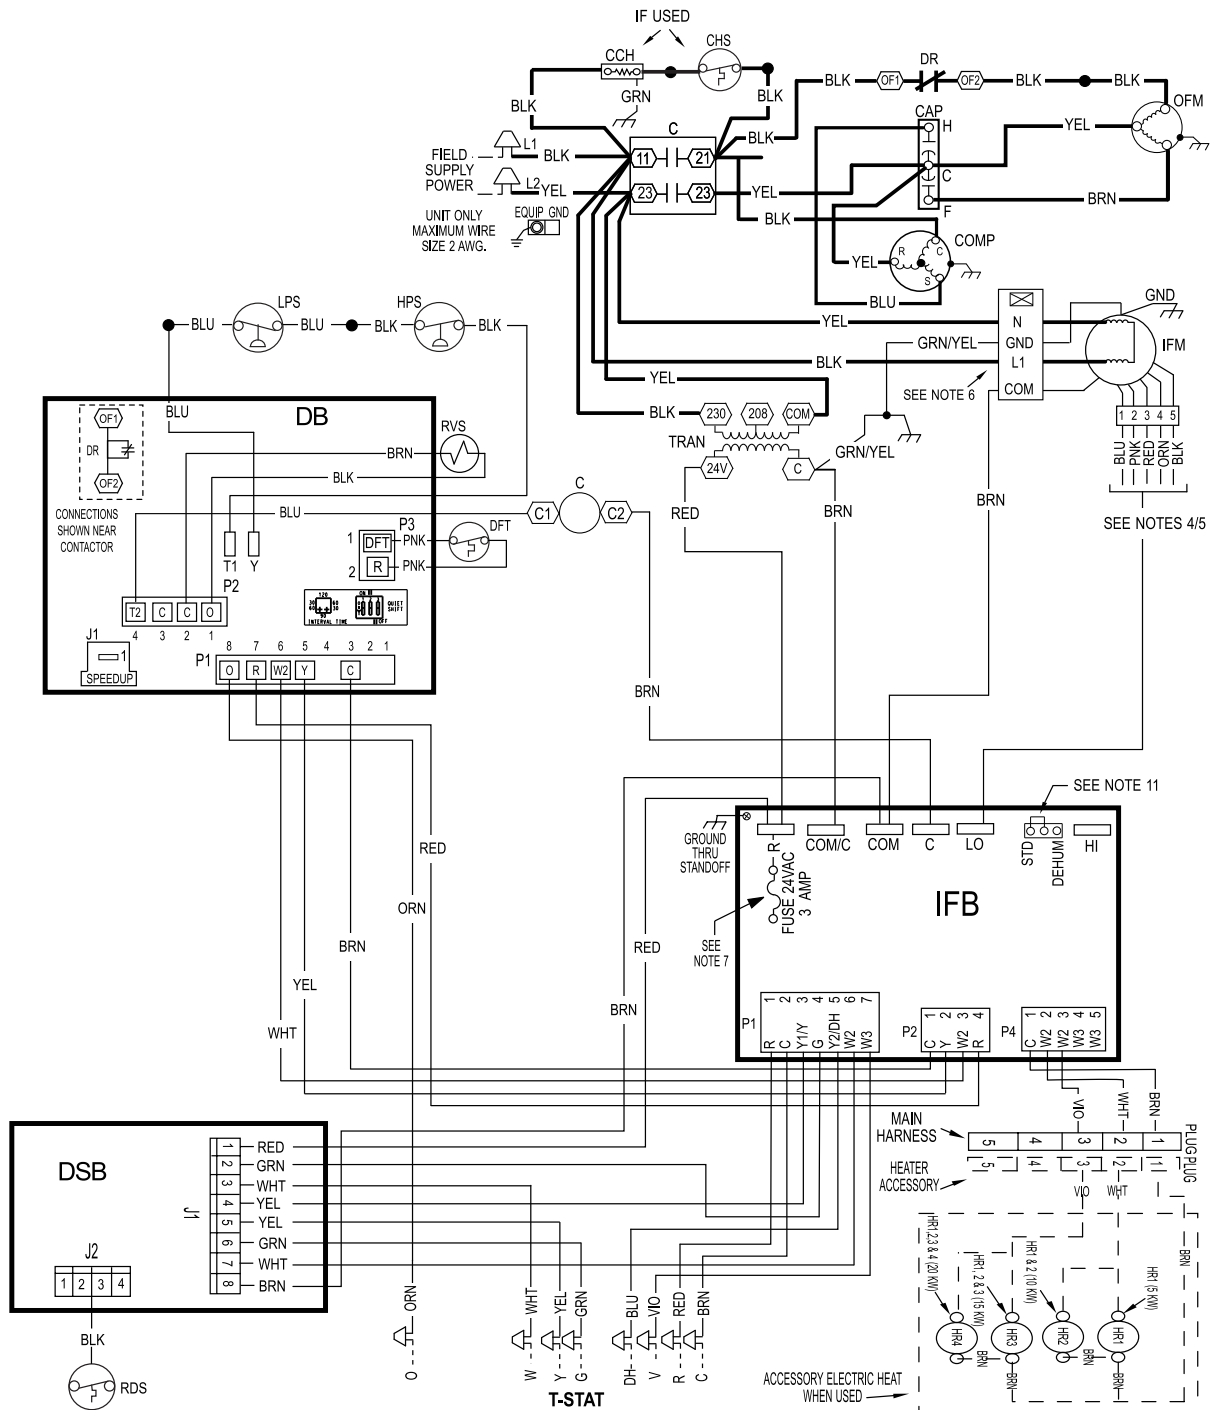

NOTES:

- IF ANY OF THE ORIGINAL WIRES FURNISHED ARE REPLACED IT MUST BE REPLACED WITH THE SAME OR ITS EQUIVALENT.
- SEE PRE SALE LITERATURE FOR THERMOSTATS.
- USE 75 DEGREES C COPPER CONDUCTORS FOR FIELD INSTALLATION.
- REFER TO INSTALLATION INSTRUCTIONS FOR CORRECT SPEED SELECTION FOR IFM.
- RELOCATION OF SPEED TAPS MAY BE REQUIRED WHEN USING FIELD INSTALLED ELECTRIC HEATERS. CONSULT INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED TAP SETTING.
- "DO NOT DISCONNECT PLUG UNDER LOAD".
- THIS FUSE IS MANUFACTURED BY LITTLE FUSE, P/N 287003.
- N.E.C. CLASS 2, 24V.
- UNIT FACTORY - SHIPPED IN STD. MODE.
- CCH NOT USED ON ALL UNITS.
- DEHUM FEATURE CANNOT BE USED WHEN ECONOMIZER IS INSTALLED.
- UNIT FACTORY - SHIPPED IN STD. MODE.

UNIT COMPONENT ARRANGEMENT

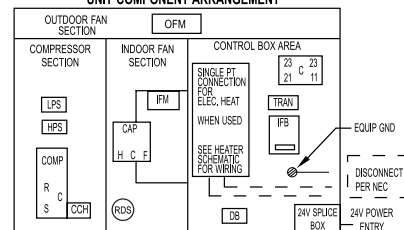

DANGER: ELECTRICAL SHOCK HAZARD DISCONNECT POWER BEFORE SERVICING

△ FIELD SPLICE	⬡ SPLICE (MARKED)	--- ACCESSORY OR OPTIONAL WIRING	CCH CRANKCASE HEATER
○ TERMINAL (MARKED)	— FACTORY LOW VOLTAGE	— FACTORY HI VOLTAGE	CHS CRANKCASE HEATER SWITCH
○ TERMINAL (UNMARKED)	- - FIELD CONTROL WIRING	C CONTACTOR	COMP COMPRESSOR MOTOR
● SPLICE	— - FIELD POWER WIRING	CAP CAPACITOR	CTD COMPRESSOR TIME DELAY

DB DEFROST BOARD	DSB DISSIPATION BOARD	IFB INDOOR FAN BOARD	RDS REFRIG. DETECTION SENSOR
DH DEHUM	GND GROUND	IFM INDOOR FAN MOTOR	RVS REVERSING VALVE
DFT DEFROST TEMPERATURE SWITCH	HPS HIGH PRESSURE SWITCH	LPS LOW PRESSURE SWITCH	TRAN TRANSFORMER
DR DEFROST RELAY (SEE DB)	HR HEATER RELAY	OFM OUTDOOR FAN MOTOR	T-STAT THERMOSTAT



A240138


DANGER: ELECTRICAL SHOCK HAZARD DISCONNECT POWER BEFORE SERVICING



1. IF ANY OF THE ORIGINAL WIRES FURNISHED ARE REPLACED IT MUST BE REPLACED WITH THE SAME OR ITS EQUIVALENT.
2. SEE PRE SALE LITERATURE FOR THERMOSTATS.
3. USE 75 DEGREES C COPPER CONDUCTORS FOR FIELD INSTALLATION.
4. REFER TO INSTALLATION INSTRUCTIONS FOR CORRECT SPEED SELECTION FOR IFM.
5. RELOCATION OF SPEED TAPS MAY BE REQUIRED WHEN USING FIELD INSTALLED ELECTRIC HEATERS. CONSULT INSTALLATION INSTRUCTIONS TO DETERMINE CORRECT SPEED TAP SETTING.
6. "DO NOT DISCONNECT PLUG UNDER LOAD".
7. THIS FUSE IS MANUFACTURED BY LITTLE FUSE, P/N 287003.
8. DEHUM FEATURE CANNOT BE USED WHEN ECONOMIZER IS INSTALLED. UNIT FACTORY - SHIPPED IN STD MODE.
9. N.E.C. CLASS 2, 24V.
10. CCH NOT USED ON ALL UNITS.
11. REMOVE YELLOW SPLICE WHEN ECONOMIZER AND ECONOMIZER RELAYS ARE USED AND CONNECT TO RELAY R1 AS SHOWN.
12. WHEN ECONOMIZER AND ECONOMIZER RELAYS ARE USED CONNECT THE YELLOW AND BLACK WIRES TO RELAY "R" AS SHOWN. RELAY KIT REQUIRED WITH ECONOMIZER AND HEAT PUMP / DUAL FUEL UNITS.
13. WHEN ECONOMIZER AND ECONOMIZER RELAYS ARE USED. INSTALL WIRES AS SHOWN ONTO THE COILS OF RELAY R AND RELAY R1.

DANGER: ELECTRICAL SHOCK HAZARD DISCONNECT POWER BEFORE SERVICING

FIELD SPLICE	SPLICE (MARKED)	ACCESSORY OR OPTIONAL WIRING	CCH CRANKCASE HEATER	DH DEHUM
TERMINAL (MARKED)	FACTORY LOW VOLTAGE	FACTORY HI VOLTAGE	CHS CRANKCASE HEATER SWITCH	DFT DEFROST TEMPERATURE SWITCH
TERMINAL (UNMARKED)	FIELD CONTROL WIRING	C CONTACTOR	COMP COMPRESSOR MOTOR	DR DEFROST RELAY (SEE DB)
SPLICE	FIELD POWER WIRING	CAP CAPACITOR	DB DEFROST BOARD	DSB DISSIPATION BOARD
HR HEATER RELAY				
ECON ECONOMIZER	IFB INDOOR FAN BOARD	RDS REFRIG. DETECTION SENSOR		
EQUIP EQUIPMENT	IFM INDOOR FAN MOTOR	RVS REVERSING VALVE		
GND GROUND	LPS LOW PRESSURE SWITCH	STD STANDARD MODE		
HPS HIGH PRESSURE SWITCH	OFM OUTDOOR FAN MOTOR	TRAN TRANSFORMER		
		T-STAT THERMOSTAT		





DANGER: ELECTRICAL SHOCK HAZARD DISCONNECT POWER BEFORE SERVICING



- A240141

DANGER: ELECTRICAL SHOCK HAZARD DISCONNECT POWER BEFORE SERVICING

	FIELD SPICE		SPICE (MARKED)		ACCESSORY OR OPTIONAL WIRING	CCH	CRANKCASE HEATER
	TERMINAL (MARKED)		FACTORY LOW VOLTAGE		FACTORY HI VOLTAGE	CHS	CRANKCASE HEATER SWITCH
	TERMINAL (UNMARKED)		FIELD CONTROL WIRING	C	CONTACTOR	COMP	COMPRESSOR MOTOR
	SPICE		FIELD POWER WIRING	CAP	CAPACITOR	DB	DEFROST BOARD
DEHUM	DEHUM	ECON	ECONOMIZER	IFB	INDOOR FAN BOARD	RDS	REFRIG. DETECTION SENSOR
DEF	DEFROST TEMPERATURE SWITCH	EQUIP	EQUIPMENT	IMF	INDOOR FAN MOTOR	RVS	REVERSING VALVE
DR	DEFROST RELAY (SEE DB)	GND	GROUND	LPS	LOW PRESSURE SWITCH	STD	STANDARD MODE
DSB	DISSIPATION BOARD	HPS	HIGH PRESSURE SWITCH	OFM	OUTDOOR FAN MOTOR	TRAN	TRANSFORMER
		HR	HEATER RELAY	OFR	OUTDOOR FAN RELAY	T-STAT	THERMOSTAT

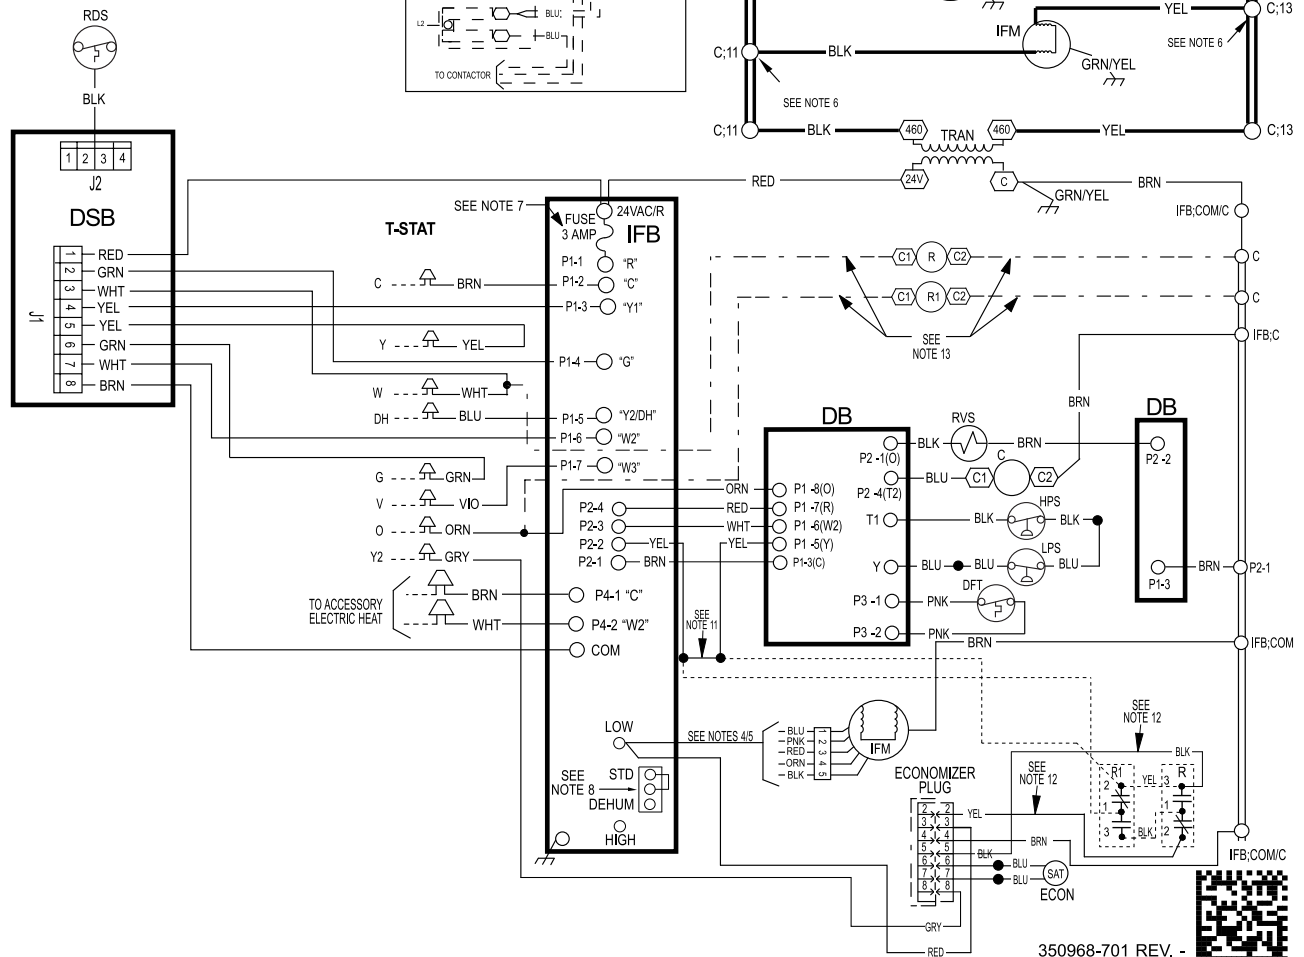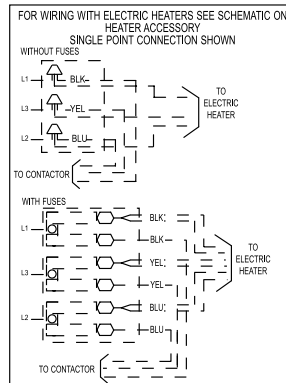

350968-701 REV. -



Controls

Operating Sequence

When power is supplied to unit, the transformer (TRAN) is energized.

On units with crankcase heater, heater is also energized.

Cooling — With the thermostat in the cooling position, the thermostat makes circuit R-O. This energizes the reversing valve solenoid (RVS) and places the unit in standby condition for cooling.

As the space temperature rises, the thermostat closes circuit R-Y. A circuit is made to contactor (C), starting the compressor (COMP) and outdoor-fan motor (OFM). Circuit R-G is made at the same time and starts the indoor-fan motor (IFM).

When the thermostat is satisfied, contacts open, deenergizing C. The COMP and OFM stop, and the IFM stops after the preselected time delay.

Heating — On a call for heat, thermostat makes circuits R-Y and R-G.

A circuit is made to C, starting COMP and OFM. Circuit R-G also is completed, energizing IFR and starting IFM after the selected time delay.

Should room temperature continue to fall, circuit R-W is made through second-stage thermostat. If optional electric heat package is used, a relay is energized, bringing on first bank of supplemental electric heat. When thermostat is satisfied, contacts open, deenergizing contactor and relay; motors and heaters deenergize.

Demand Defrost Mode— The defrost mode is factory set to an initial 60-minute time interval. It may also be adjusted to an initial interval of 30, 90, or 120 minutes. During operation, the control optimizes current defrost time based on the previous defrost interval and previous defrost period. If the previous defrost period is less than 2 minutes for two consecutive defrost cycles the control will lengthen the defrost interval by 15 minutes, up to a maximum of 120 minutes or 30 minutes greater than the original setpoint, whichever comes first. If the previous defrost period is more than 5 minutes for two consecutive defrost cycles the control will shorten the defrost interval by 15 minutes, down to a minimum of 30 minutes or 30 minutes from the original setpoint, whichever is first. After the defrost condition is satisfied, or after a maximum of 10 minutes in defrost mode, the unit will resume normal heating operation.

Guide Specifications

Packaged Heat Pump System

HVAC Guide Specifications

Size Range: 2 to 5 Tons, Nominal Cooling

Part 1 } General

SYSTEM DESCRIPTION

Outdoor, packaged, air-to-air heat pump unit utilizing a hermetic scroll compressor for cooling duty and optional electric heating. Unit shall discharge supply air vertically or horizontally as shown on contract drawings. Outdoor fan/coil section shall have a draw-thru design with vertical discharge for minimum sound levels.

QUALITY ASSURANCE

- Unit shall be rated in accordance with AHRI Standards 210/240 and 270.
- Unit shall be designed in accordance with UL Standard 1995.
- Unit shall be manufactured in a facility registered to ISO 9001 manufacturing quality standard.
- Unit shall be UL listed and c-UL certified as a total package for safety requirements.
- Roof curb shall be designed to conform to NRCA Standards.
- Insulation and adhesives shall meet NFPA 90A requirements for flame spread and smoke generation.
- Cabinet insulation shall meet ASHRAE Standard 62P.

DELIVERY, STORAGE AND HANDLING

Unit shall be stored and handled per manufacturer's recommendations.

Part 2 } Products

EQUIPMENT

General:

Factory-assembled, single-piece, heat pump unit. Contained within the enclosure shall be all factory wiring, piping, controls, refrigerant charge (R-410A), and special features required prior to field start-up.

Unit Cabinet:

- Unit cabinet shall be constructed of phosphated, zinc-coated, pre-painted steel capable of withstanding 500 hours of salt spray.
- Normal service shall be through 3 removable cabinet panels.
- The unit shall be constructed on a rust proof unit base that has an externally trapped, integrated sloped drain.
- Indoor fan compartment top surface shall be insulated with a minimum 1/2-in. (13 mm) thick, flexible fiberglass insulation, coated on the air side and retained by adhesive and mechanical means. The indoor wall sections will be insulated with a minimum semi-rigid, foil-faced board capable of being wiped clean. Aluminum foil-faced fiberglass insulation shall be used in the entire indoor air cavity section.
- Unit shall have a field-supplied condensate trap.
- Metal Insulated Duct Covers for side discharge will be standard on all sizes.
- Unit insulation conforms to ASHRAE 62P.

Fans:

- The indoor fan shall be 5-speed, direct-drive, as shown on equipment drawings.
- Fan wheel shall be made from steel and shall be double-inlet type with forward-curved blades with corrosion resistant finish. Fan wheel shall be dynamically balanced.
- Outdoor fan shall be direct-drive, propeller-type with aluminum blades riveted to corrosion resistant steel spiders, be dynamically balanced, and discharge air vertically.

Compressor:

- Fully hermetic compressors with factory-installed vibration isolation.
- Scroll compressors shall be standard on all units.

Coils:

- Indoor coils shall have aluminum plate fins mechanically bonded to seamless aluminum tubes with all joints brazed. Tube sheet openings shall be belled to prevent tube wear. Outdoor coil shall have aluminum fins with copper tubing.

Refrigerant Metering Device:

- Refrigerant metering device shall be thermostatic expansion valve or fixed orifice for cooling, and fixed orifice for heating.

Filters:

- Filter section shall consist of field-installed, throwaway, 1-in. (25 mm) - thick fiberglass filters of commercially available sizes.

Controls and Safeties:

- Unit controls shall be complete with a self-contained, low-voltage control circuit.
- Units shall incorporate an internal compressor protector that provides reset capability.

Operating Characteristics:

- Unit shall be capable of starting and running at 125°F (51.7°C) ambient outdoor temperature.
- Compressor with standard controls shall be capable of operation down to 40°F (4.4°C) ambient outdoor temperature in cooling mode.
- Unit shall be provided with 90-second fan time delay after the thermostat is satisfied.

Electrical Requirements:

- All unit power wiring shall enter the unit cabinet at a single location.

Motors:

- Compressor motors shall be of the refrigerant-cooled type with line-break thermal and current overload protection.
- All fan motors shall have permanently lubricated bearings, and inherent, automatic reset, thermal overload protection.
- Condenser fan motor shall be totally enclosed.
- Evaporator fan motor to be ECM Motor.

Special Features Available:

- Compressor Start Kit (single phase units only):
Shall provide additional starting torque for single-phase compressors.
- Thermostat:
To provide for two-stage heating and one-stage cooling in addition manual or automatic changeover and indoor fan control.
- Crankcase Heater:
Shall provide anti-floodback protection for lowload cooling applications.
- Economizer:
(Horizontal - Field installed accessory)
(Vertical - Field installed accessory)
 - a. Economizer controls capable of providing free cooling using outside air.
 - b. Equipped with low leakage dampers not to exceed 3% leakage, at 1.0 IN. W.C. pressure differential.
 - c. Spring return motor shuts off outdoor damper on power failure.

Guide Specifications (Continued)

- Electric Heaters
 - a. Electric heater shall be available as a field installed option.
 - b. Heater elements shall be open wire type, adequately supported and insulated with ceramic bushings.
 - c. Electric heater packages must provide single point power connection capability.
- Filter Rack Kit:

Shall provide filter mounting for downflow applications. Offered as a field installed accessory.
- Flat Roof Curb:

Curbs shall have seal strip and a wood nailer for flashing and shall be installed per manufacturer's instructions.
- Low Ambient Package:

Shall consist of a solid-state control and outdoor coil temperature sensor for controlling outdoor-fan motor operation, which shall allow unit to operate down to 0°F (-17.7°C) outdoor ambient temperature.
- Manual Outdoor Air Damper:

Package shall consist of damper, birdscreen, and rainhood which can be preset to admit outdoor air for year-round ventilation.
- Square-To-Round Duct Transitions (24-48 size):

Shall have the ability to convert the supply and return openings from rectangular to round.
- Time Guard II

Automatically prevents the compressor from restarting for at least 4 minutes and 45 seconds after shutdown of the compressor. Not required when a corporate programmable thermostat is applied or with a RTU-MP control. Offered as a field installed accessory.
- Dual Point Electric Heaters|

Allows you to power the electric heater and unit contactor separately by having two individual field power supply circuits connected respectively.
- Cabinet air leakage of 2.0% or less at .5 in. W.C. when tested in accordance with ASHRAE standard 193.
- Louver Metal Outdoor Coil Grille

Shall provide hail and vandalism protection.

Training

My Learning Center is your central location for professional residential HVAC training resources that help strengthen careers and businesses. We believe in providing high quality learning experiences both online and in the classroom.

Access My Learning Center with your HVACpartners credentials at www.mlctraining.com. Please contact us a mylearning@carrier.com with questions.