



Commercial Renaissance™ Line Classic® Series Packaged Air Conditioners



RACD Series

Cooling Efficiencies up to: 11.2 EER & 14.8 IEER

Nominal Sizes: 7.5, 8.5, 10 & 12.5 Tons [26.4, 29.9, 35.2 & 44.0 kW]

Cooling Capacities: 88k Btu/h [25.78 kW] to 148k Btu/h [43.36 kW]

Refrigerant Type: R-454B

ASHRAE 90.1 2022 Compliant Models



TABLE OF CONTENTS

Unit Features and Benefits.....3-12

Model Number Identification13

Options14

Selection Procedure15

General Data16

General Data Notes17

Gross Systems Performance Data.....18-25

Airflow Performance.....26-41

Electrical Data42-45

Electric Heater Kits.....46-56

A2L Refrigerant Installation Safety Data57

Dimensional Data58-60

Field Installed Accessories.....61-90

Guide Specifications91-97

Limited Warranty98



RACDYB STANDARD FEATURES INCLUDE:

- Factory charged with R-454B refrigerant
- Wired and run tested
- Scroll compressors with internal line break overload and high pressure protection
- Models have two stages of cooling
- Convertible airflow – vertical down flow or horizontal side flow
- Forkable base rails for easy handling and lifting
- Cooling operation up to 125°F ambient
- MicroChannel evaporator and condenser coil
- PlusOne® ServiceSmart package includes:
 Qwik-Change Flex-Fit Rack
 Qwik-Slide Blower Assembly
 Qwik-Clean Drain Pan
- Overflow condensate sensor
- PlusOne® Diagnostics with Dual 7-Segment LED Display to meet code compliance
- One-piece top cover and base pan with drawn supply and return opening
- Two-piece control door
- ¼ turn fasteners on filter access door
- Color-coded and labeled wiring
- External lockable gauge ports
- TXV refrigerant metering system
- Solid-core liquid line filter drier
- High pressure and low pressure/loss of charge protection with built in Smart Logic
- Insulation encapsulated throughout entire unit
- High performance belt drive motor with variable pitch pulleys and quick adjust belt system
- Blower with Variable Frequency Drive (VFD) control is standard
- Industry standard footprint and matching connections
- MERV 8 & MERV 13 filters are available as a field-installed option
- Refrigerant leak detection system

Designing for Sustainability with Low GWP



For 2025, the Environmental Protection Agency (EPA) has set a global warming potential (GWP) limit of 700 for refrigerant used in most heating and cooling systems. This new requirement will result in a 78%¹ lower GWP than previous-generation refrigerants—with only minimal changes to system installation. For us, this is another step toward our ongoing sustainability goal of reducing greenhouse gas emissions, while still delivering an exceptional level of energy efficient, dependable comfort.

¹When comparing the GWP of R-454B to R-410A refrigerant.

FACTORY INSTALLED OPTIONS:

- Louvered panels
- Hinged access doors
- PlusOne® HumidiDry® Dehumidification System
- Low ambient/freeze stat
- Non-powered convenience outlet
- Downflow Economizer (Title 24 and ASHRAE 90.1 2022 Compliant)
- Supply and return smoke detector
- ElectroFin® E-Coat for MicroChannel Condenser Coil
- ClearControl™ Direct Digital Control (DDC)
- Comfort Alert®/Phase-monitor Protection

FIELD INSTALLED ACCESSORY EQUIPMENT:


Accessory	Model Number	Factory Installation Available?
Economizers		
DDC Economizer with Single Enthalpy (Downflow) <i>MicroMetl Economizer with Honeywell Controller</i>	RXRD-01MDDBM3	Yes
DDC Economizer with Single Enthalpy (Horizontal) <i>MicroMetl Economizer with Honeywell Controller</i>	RXRD-01MDHBM3	No
Non-DDC Economizer with No Controls (Downflow) <i>MicroMetl Economizer, Belimo Actuator</i>	RXRD-31MDDAM3	No
Non-DDC Economizer with Single Enthalpy (Downflow) <i>MicroMetl Economizer with Siemens Controls</i>	RXRD-11MDDAM3	Yes
Non-DDC Economizer with Single Enthalpy (Downflow) <i>Ruskin Rooftop Systems Economizer with RRS Basic Controller</i>	RXRD-41MDDAM3	Yes
Non-DDC Economizer with Single Enthalpy (Downflow) <i>Ruskin Rooftop Systems Economizer with SiemensController</i>	RXRD-51MDDAM3	Yes
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>MicroMetl Economizer with Siemens Controls</i>	RXRD-11MDHAM3	No
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>Ruskin Rooftop Systems Economizer with RRS Basic Controller</i>	RXRD-41MDHAM3	No
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>Ruskin Rooftop Systems Economizer with SiemensController</i>	RXRD-51MDHAM3	No
Economizer Universal DDC Interface Kit	RXRX-DDC01	Yes

FIELD INSTALLED ACCESSORY EQUIPMENT (CONTINUED):

Accessory	Model Number	Factory Installation Available?
Comfort Alert ¹ (3 Phase) DDC	RXXR-AZ01	Yes
Comfort Alert ¹ (3 Phase) Non-DDC	RXXR-AZ02	Yes
Communication Card, BACnet	RXXR-AY01	No
Communication Card, LonWorks	RXXR-AY02	No
Concentric Adapter 7.5/8.5 Ton Drop	RXMC-DD01	No
Concentric Adapter 10 Ton Drop	RXMC-DD02	No
Concentric Adapter 12.5 Ton Drop	RXMC-DD03	No
Concentric Diffuser 7.5/8.5 Ton Drop	RXRN-AED2000	No
Concentric Diffuser 10.0 Ton Drop	RXRN-AED3415	No
Concentric Diffuser 12.5 Ton Drop	RXRN-AED3618	No
Concentric Diffuser 7.5/8.5 Ton Flush	RXRN-AEF2000	No
Concentric Diffuser 10.0 Ton Flush	RXRN-AEF3415	No
Concentric Diffuser 12.5 Ton Flush	RXRN-AEF3618	No
Convenience Outlet, Unwired	RXXR-BN01	Yes
Dual Enthalpy Kit (for Honeywell Jade™)	RXXR-BV01	No
Dual Enthalpy Kit DDC (for Honeywell DDC)	RXXR-BV02	No
Dual Enthalpy, Temperature and Humidity Sensor (for Ruskin Basic Controller)	PD955977	No
Dual Enthalpy, Temperature and Humidity Sensor (for Siemens)	PD555460	No
Electric Heater Kits	RXJJ-DD10CP	Yes
	RXJJ-DD15CP	Yes
	RXJJ-DD20CP	Yes
	RXJJ-DD30CP	Yes
	RXJJ-DD40CP	Yes
	RXJJ-DD10DNV	Yes
	RXJJ-DD15DNV	Yes
	RXJJ-DD20DNV	Yes
	RXJJ-DD30DNV	Yes
	RXJJ-DD40DNV	Yes
	RXJJ-DD10Y	No
	RXJJ-DD15Y	No
	RXJJ-DD20Y	No
	RXJJ-DD30Y	No
	RXJJ-DD40Y	No
Freeze Stat Kit	RXXR-AM01	Yes
Fresh Air Damper, Manual	RXRF-ADA1	No
Fresh Air Damper, Motorized	RXRF-ADB1	No
Fresh Air Damper, Motorized (DDC)	RXRF-ADC1	No
Low-Ambient Control Kit	RXRZ-A04	Yes

¹One (1) Comfort Alert required per compressor²Compatible with roofcurbs RXKG-CAE14 or RXKG-CAE24

Accessory	Model Number	Factory Installation Available?
MERV 8 Filter 7.5 & 8.5 Ton	RXMF-M08A22020	No
MERV 8 Filter 10 & 12.5 Ton	RXMF-M08A22520	No
MERV 13 Filter 7.5 & 8.5 Ton	RXMF-M13A22020	No
MERV 13 Filter 10 & 12.5 Ton	RXMF-M13A22520	No
Outdoor Coil Louver Kit - 7.5 & 8.5 Ton	RXXR-ADD04A	Yes
Outdoor Coil Louver Kit - 10 & 12.5 Ton	RXXR-ADD04B	Yes
Power Exhaust (230V) Kit, Convertible (MicroMetl)	RXXR-CDF01C	No
Power Exhaust (460V) Kit, Convertible (MicroMetl)	RXXR-CDF01D	No
Power Exhaust (230V) Kit for Downflow Economizer (RRS)	RXXR-RDF01C	No
Power Exhaust (460V) Kit for Downflow Economizer (RRS)	RXXR-RDF01D	No
Power Exhaust (575V) Kit for Downflow Economizer (RRS)	RXXR-RDF01Y	No
Power Exhaust (230V) Kit for Horizontal Economizer (RRS)	RXXR-RDF03C	No
Power Exhaust (460V) Kit for Horizontal Economizer (RRS)	RXXR-RDF03D	No
Power Exhaust (575V) Kit for Horizontal Economizer (RRS)	RXXR-RDF03Y	No
Roofcurb Adapter ²	RXXR-DDCAE	No
Roofcurb, 14"	RXKG-DDD14	No
Roofcurb, 14" Welded	RXKG-SD14	No
Roofcurb, 24"	RXKG-DDD24	No
Roofcurb, 24" Welded	RXKG-SD24	No
Sensor, Carbon Dioxide (Wall Mount)	RXXR-AR02	No
Sensor, Room Humidity	RHC-ZNS4	No
Sensor, Room Temperature and Relative Humidity	RHC-ZNS5	No
Single Point Wiring Kit	RXJX-AC0605	No
	RXJX-AC0805	No
	RXJX-AD0605	No
	RXJX-AC0909	No
	RXJX-AD0609	No
Smoke Detector Kit, Return	RXXR-BS03	No
Smoke Detector Kit, Return/Supply	RXXR-BS04	No
Unfused Service Disconnect	RXXR-BP01	Yes

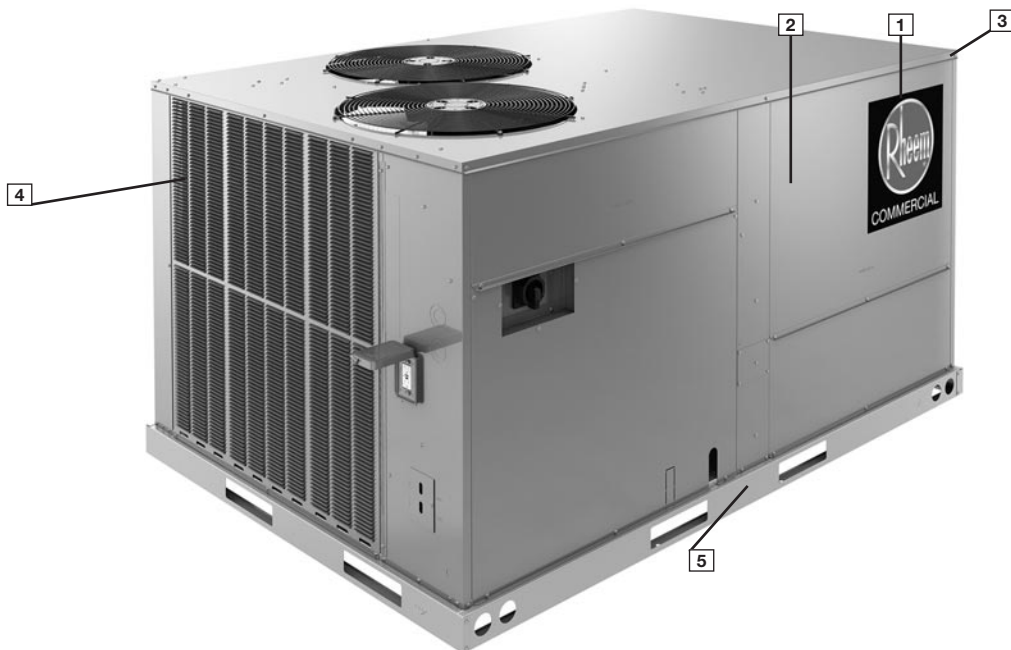

Cabinet and Foundation

Outwardly, the large *Rheem® Commercial Series* label ([1]) identifies the brand to the customer. The sheet-metal cabinet ([2]) uses 18-gauge material for structural components with an underlying coat of G90. To ensure the leak-proof integrity of these units, the design utilizes a one-piece top with a 1/8" drip lip ([3]) as well as gasket-protected panels and screws. The Rheem hail guard (optional) ([4]) sets the standard for coil protection in the industry. Electro deposition, baked-on enamel that is tested to withstand a rigorous 1000-hour salt spray test, per ASTM B117.


Anything built to last must start with the right foundation. Following that model, the foundation is comprised of 14-gauge, commercial-grade, full perimeter base rails ([5]) that integrate fork slots and rigging holes to save set-up time on the job site.

Easy Installation

The Renaissance line features a footprint that simplifies the replacement process by eliminating the need for a new curb adapter and being able to match inlet, outlet and electrical connections of the most common/industry-standard configurations.


Base Pan

The base pan is stamped to form a 7/8" flange around the supply and return cover, which eliminates the worry of water entering the conditioned space ([6]). All insulation is secured with both adhesive and mechanical fasteners, and all edges are hidden.

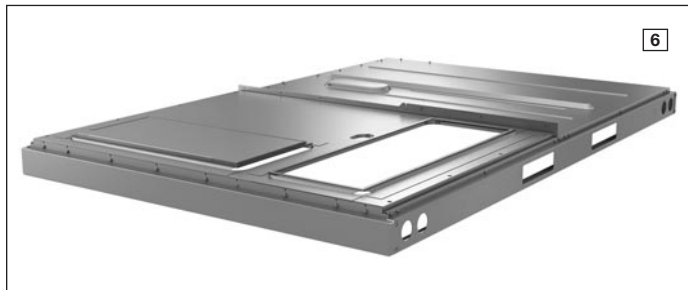

Drain Pan

The Qwik-Clean Drain Pan ([7]) is made from a composite material that resists the growth of harmful bacteria. With both side and center drain options, the drain pan slides out completely for easy cleaning. It also features a standard overflow switch.

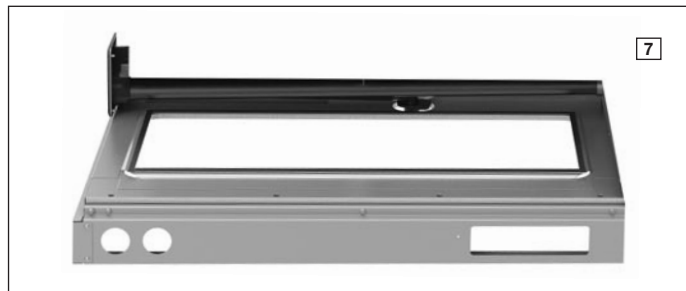

Test Standards


During development, each unit was tested to U.L. 60335-2-40, AHRI 340-360 as well as other Rheem-required reliability tests. Rheem adheres to stringent ISO 9002 quality procedures, and each unit bears the U.L. and AHRI certification labels located on the unit nameplate. Contractors can be assured that when a Rheem package unit arrives at the job, it is ready to go with a factory charge and quality checks.

Easy Access

All major compartments are easily accessible from the front of the unit: the electrical compartment, blower compartment, heating section, and outdoor section. Each compartment has mechanical fasteners. Panels are permanently embossed with the compartment name (e.g. control/filter access, blower access, and electric heat access). The filter compartment is accessed through a large, mechanically fastened panel. Information is readily available on the outside of the panel, with a nameplate that contains the model and serial numbers, electrical data, and other important unit information. Hinged access is available as an option for the electrical, blower, and filter compartments.

Charging Charts, Wiring Diagrams, & Labels

The unit charging chart is located on the outside of the compressor access panel. Electrical wiring diagrams are found on the control box cover, which allows contractors to move them to more readable locations. The model and serial numbers are located on the right of the control box. Having this information on the inside means easier model identification for the life of the product. The production line quality test assurance label is also placed in this location ([8]).



Filter Rack


Located within the filter compartment, the Qwik-Change Flex-Fit Rack ([9]) allows easy changeover between 2" and 4" standard size and readily available filters.



Blower Assembly


Removing three screws provides full access to the blower compartment. Inside, the Qwik-Slide Blower Assembly ([10]) is incredibly easy to access and remove. This makes servicing internal components such as blower motor, TXV, and microchannel coil much easier. The entire assembly slides out by removing the 3/8" screws from the blower retention bracket. The adjustable motor pulley ([11]) can easily be adjusted by loosening the bolts on either side of the motor mount. Removing the bolts allows for easy removal of the blower pulley by pushing the blower assembly up to loosen the belt. Once the pulley is removed, the motor sheave can be adjusted to the desired number of turns, ranging from 0 to 6 turns open.

Where the demands for the job require high static, Rheem offers drives that deliver nominal airflow up to 2" of static. By referring to the airflow performance tables listed in the installation instructions, proper static pressure and CFM requirements can be dialed in. The scroll housing ([12]) and blower scroll provide quiet and efficient airflow. The blower sheave is secured by an "H" bushing that firmly secures the pulley to the blower shaft, resulting in years of trouble-free operation. The "H" bushing allows for easy removal of the blower pulley from the shaft. This is an improvement from a set screw, which can score the shaft and create burrs that make blower-pulley removal difficult.

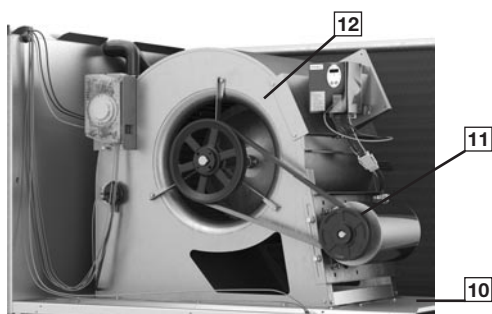


High and Low Pressure Switches & Freeze Stat

High pressure ([13]) and low pressure ([14]) switches are standard. They are located in the outdoor section along with the low-ambient control ([15]). The optional Freeze Stat ([16]) (standard on models with ClearControl), is clipped onto the suction line in the blower compartment. The low ambient control allows the compressor to operate down to 0 degrees ambient temperature by cycling the outdoor fans on high pressure. The high-pressure switch shuts off the compressors if pressures exceeding 610 PSIG are detected. The low-pressure switch shuts off the compressors if low pressure is detected due to loss of charge. Built-in Smart Logic reduces nuisance calls by only shutting off compressors after the third detection. The freeze stat protects the compressor if the evaporator coil gets too cold (below freezing) due to low airflow.

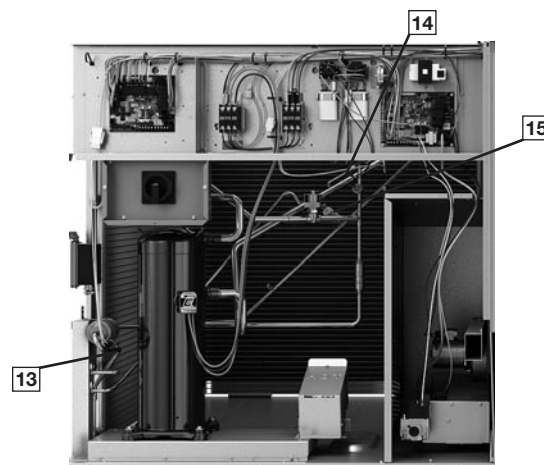


MicroChannel Evaporator & TXV

The MicroChannel Evaporator ([17]) is accessible through the blower compartment, and through the filter rack, to simplify cleaning. The evaporator uses microchannel technology for maximum heat transfer, light weight, fewer manually brazed connections and reduced refrigerant charge. The TXV metering device maintains superheat over a wide range of varying temperatures optimizing unit performance for all conditions.

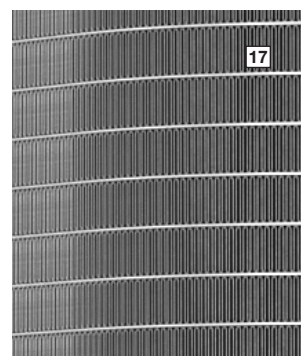


Control Box

Inside the control box (18), each electrical component is clearly labeled; that label matches the component to the wire diagram for ease of trouble shooting. All wiring is numbered on each end of the termination and is color-coded to match the wiring diagram. The control transformer has a low voltage circuit breaker that trips if an electrical short occurs. There is a blower contactor and compressor contactor for each compressor.

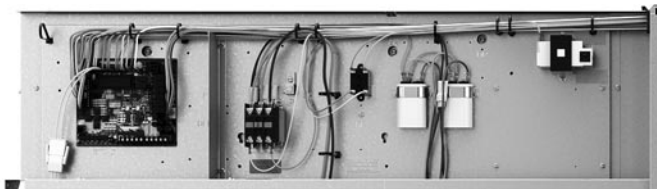

ClearControl

The optional ClearControl system consisting of a rooftop unit controller, temperature sensors, and pressure sensors, allows real-time monitoring and communication between rooftop units. The Rooftop Unit Controller (RTU-C) that is factory mounted and wired into the control panel. The RTU-C is a solid-state, micro-processor-based control board that provides flexible control and extensive diagnostics for all unit functions. The RTU-C, using proportional/integral control algorithms, performs specific unit functions that govern unit operation in response to zone conditions, system temperatures, system pressures, ambient conditions, and electrical inputs. The RTU-C features a 16 x 2 character LCD display and a five-button keypad for local configuration and direct diagnosis of the system (20). Features include a clogged filter switch (CFS), fan proving switch (FPS), return air temperature sensor (RAT), discharge air temperature sensor (DAT), and outdoor air temperature sensor (OAT). Freeze sensors (FS) are used in place of freeze stats to allow measurement of refrigerant suction line temperatures.

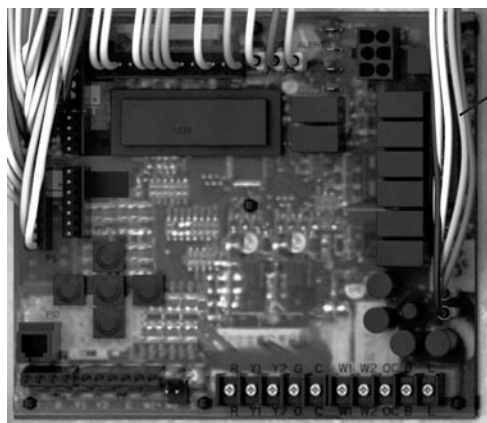


The RACD with the RTU-C is specifically designed to be applied in four distinct applications:

- 1. BACnet Communication** — The RACD is compatible with a third party building management system that supports the BACnet Application Specific Controller device profile, with the use of a field installed BACnet Communication Module. The BACnet Communication Module plugs onto the unit RTU-C controller and allows communication between the RTU-C and the BACnet MSTP network. A zone sensor, a BACnet network zone sensor, a BACnet thermostat, or DDC controller may be used to send the zone temperature or thermostat demands to the RTU-C. The BACnet Communication Module is compatible with MSTP EIA-485 daisy chain networks communicating at 38.4 bps. It is compatible with twisted pair, shielded cables.
- 2. LonWorks Communication** — The RACD is compatible with a third party building management system that supports the LonMark Space Comfort Controller (SCC) functional profile or LonMark Discharge Air Controller (DAC) functional profile. This is accomplished with a field installed LonMark communication module. The LonMark Communication Module plugs onto the RTU-C controller and allows communication between the RTU-C and a LonWorks network. A zone sensor, a LonTalk network zone sensor, or a LonTalk thermostat or DDC controller may be used to send the zone temperature or thermostat demands to the RTU-C. The LonMark Communication Module utilizes an FTT-10A free topology transceiver communicating at 78.8 kbps. It is compatible with Echelon qualified, twisted pair cable, Belden 8471, or NEMA Level 4 cables. The module can communicate up to 1640 feet with no repeater. The LonWorks limit of 64 nodes per segment applies to this device.
- 3. 24V Thermostat Compatibility** — The RACD is compatible with a programmable 24 volt thermostat. Connections are made via conventional thermostat screw terminals. Extensive unit status and diagnostics are displayed on the LCD screen of the RTU-C.
- 4. Zone Sensor Compatibility** — The RACD is compatible with a zone sensor and a mechanical or solid state time clock connected to the RTU-C. Extensive unit status and diagnostics are displayed on the LCD screen of the RTU-C.

Comfort Alert

A factory or field installed Comfort Alert (21) module is available for power phase-monitoring protection and additional compressor diagnostics. The alarms can be displayed on the RTU-C display, through the (BAS) network, or connected to the "L-Terminal" of a thermostat for notification.

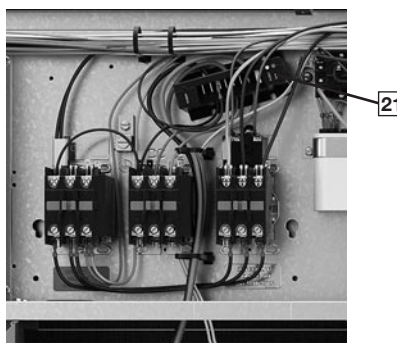


Variable Frequency Drive

The supply fan Variable Frequency Drive (VFD) (22) optimizes energy usage year round by providing a lower speed for first stage cooling operation, improving IEER over the conventional constant fan system. Operating in the constant fan mode at the reduced speed can use as little as $\frac{1}{5}$ of the energy of a conventional constant fan system. Also, by operating at a lower speed on first stage cooling, up to 126% more moisture is removed, improving comfort during low load operation. VFD comes standard. The VFD supply fan factory option meets California Title 24 and ASHRAE 90.1-2022 requirements for multi blower speed control. VFD also ramps up to the desired speed, reducing stress on the supply fan components and noise from a sudden inrush of air. Because the airflow is cut in half during first stage cooling and constant fan operation, noise is much less during these modes of operation.




Convenience Outlet

For added convenience in the field, the factory-installed option of non-powered convenience (23) outlet is available. Low and high voltage can enter from the side or through the base. Low-voltage connections are made through the low-voltage terminal strip. For ease of access, the U.L.-required low voltage barrier can be temporarily removed for low-voltage termination and then reinstalled. The high-voltage connection is terminated at the number 1 compressor contactor. The suggested mounting for the field-installed disconnect or circuit breaker is on the exterior side of the electrical control box.




External Lockable Gauge Ports

To the right left of the compressor compartment are the externally mounted lockable gauge ports. They are permanently identified by embossed lettering that identifies the compressor circuit, high pressure connection, (24) and low pressure connection (25). Because the gauge ports are mounted externally, an accurate diagnostic of system operation can be performed without removing access panels. Brass caps on the Schrader fitting ensure the gauge parts are leak proof.



Compressor

The compressor compartment houses the heart-beat of the unit. The scroll compressor (26) is known for its long life and for reliable, quiet, and efficient operation. The suction and discharge lines are designed with shock loops (27) to absorb the strain and stress that the starting torque, steady state operation, and shut-down cycle impose on the refrigerant tubing. Units have two stages of efficient cooling operation. Each unit comes standard with a filter dryer.

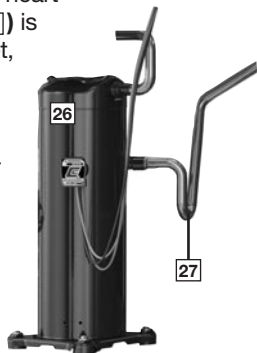


Condenser Fans

The condenser fan motors (28) can easily be accessed and maintained through the top of the unit. A down-mount fan provides corrosion protection and easy removal. The polarized plug connection allows the motor to be changed quickly and eliminates the need to snake wires through the unit.



MicroChannel Condenser Technology

The outdoor coil uses the latest MicroChannel technology (29) for the most effective method of heat transfer. The outdoor coil is protected by optional louvered panels, which allow unobstructed airflow while protecting the unit from both the environment and vandalism.

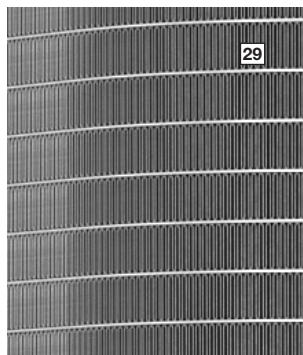

Coil Coating

Every unit offers the option of factory-applied ElectroFin E-Coat condenser coating (30) that delivers superior corrosion resistance for outdoor coils to operate in the harshest of environments.




Economizer and Dampers

Each unit is designed for both down flow or horizontal applications (31) for job configuration flexibility. The return air compartment can also contain an economizer. Each unit is pre-wired for the economizer to allow quick, plug-in installation. Available as a factory-installed option, the economizer provides free cooling when outdoor conditions are suitable and also provides fresh air to meet local requirements. It comes standard with single enthalpy controls, which can be upgraded to dual enthalpy easily in the field. The economizer control has a minimum position set point, an outdoor-air set point, a mixed-air set point, and a CO₂ set point. Barometric relief is standard on all economizers.

Power Exhaust is easily field-installed.

The power exhaust is housed in the barometric relief opening and is easily slipped in with a plugin assembly. The wire harness to the economizer also has accommodations for a smoke detector.

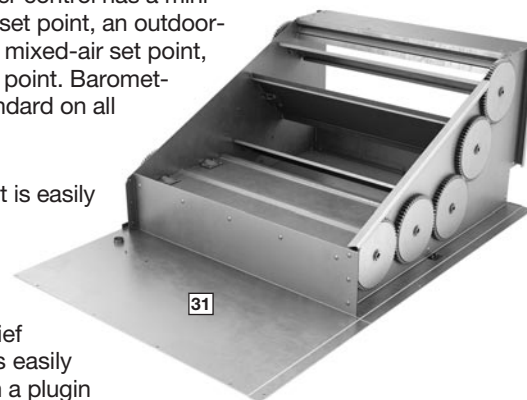

The damper minimum position, actual damper position, power exhaust on/off set point, mixed air temperature limit set point, and Demand Controlled Ventilation (DCV) set point can be read and adjusted at the unit controller display or remotely through a network connection. The Space CO₂ level, mixed air temperature, and Economizer Status (free cooling available, single or dual enthalpy) can be read at the unit controller display or remotely through a network connection. Economizer faults will trigger a network alarm and can be read at the unit controller display or remotely through a network connection.

Roofcurb

The Rheem roofcurb (32) is made for tool-less assembly at the jobsite by engaging tabs in slots of adjacent curb sides, which makes the assembly process quick and easy.



Refrigerant Leak Detection

In the event of a detected refrigerant leak, the refrigerant leak detection sensor will trigger the mitigation procedure that shuts off the compressor(s) and turns on the indoor blower motor.


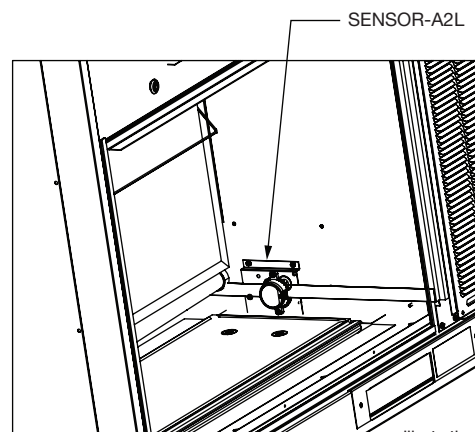


Illustration
ST-A1365-27-00

If a field-installed vertical economizer will be installed during the unit installation, the A2L leak detection sensor must be relocated as shown below. For More information, refer to the unit installation and Operation Manual.

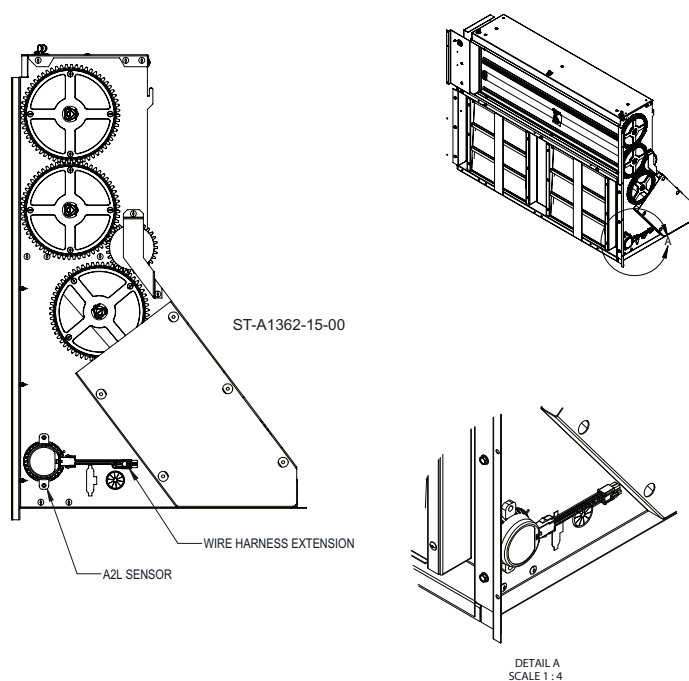

HUMIDIDRY SYSTEM FEATURES

HumidiDry is Rheem's exclusive dehumidification package unit solution. It delivers maximum humidity control without compromising desired temperature set point for a high degree of comfort. HumidiDry maintains humidity levels at a desired set point when there's little or no demand for air conditioning. The HumidiDry rooftop unit is controlled by a thermostat and humidistat. The thermostat takes priority on single-stage system. When the thermostat is activated by temperatures that exceed it set point, HumidiDry operates like a standard rooftop unit. It can operate on first stage cooling when demand is low or at full capacity when air conditioning load is high. Unlike other rooftop or reheat units, HumidiDry is uniquely designed so the VFD will operate at a low speed, increasing moisture removal during first-stage cooling operation. This provides initial defense for controlling humidity. When temperature is desirable but humidity exceeds the humidistat set point, the HumidiDry rooftop unit initiates a dehumidification cycle using a combination of hot gas and sub-cooled liquid reheat and the VFD operates at low speed. During this cycle, the HumidiDry rooftop unit delivers dry, neutral air. On a two-stage system, it is possible for both a thermostat and humidistat to register readings above set point. Under this condition, the system runs in the high stage dehumidification cycle, and the VFD operates on high speed. This provides dry conditioned air.

Figure 1 shows the refrigerant path during the normal cooling mode. The liquid refrigerant leaves the TXV with the sudden pressure drop causing the liquid to expand to a vapor and absorbing the heat from the supply air going through the evaporator coil. The refrigerant vapor then travels to the compressor where it is elevated to a higher pressure and temperature. The superheated refrigerant vapor next carries the heat to the outside coil where the heat is then rejected and the refrigerant condenses into a subcooled liquid where the process repeats itself.

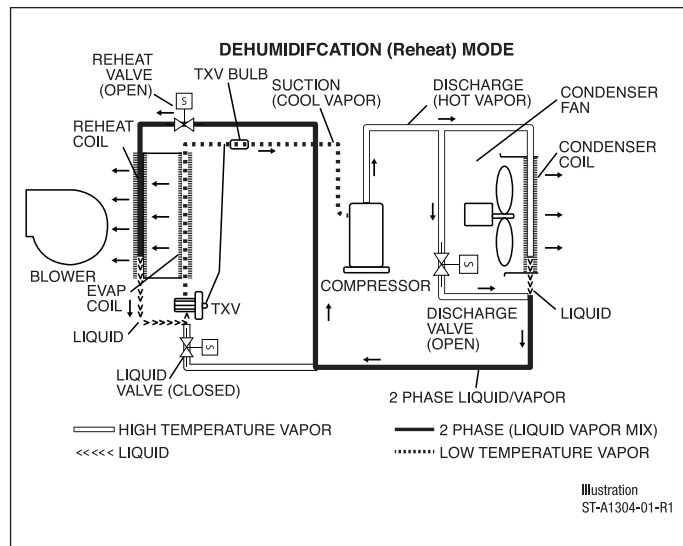
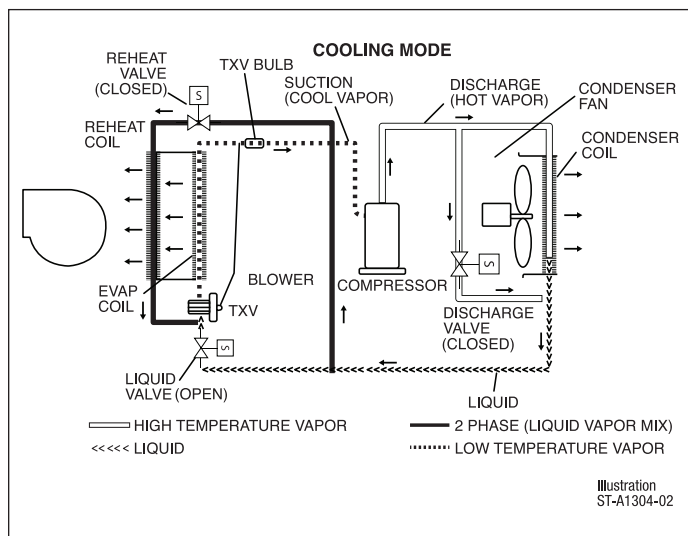


Figure 2 shows the refrigerant path during the reheat mode. When the reheat cycle is energized by the RTU-C, the reheat solenoid valve, upstream of the reheat coil opens. The liquid solenoid valve ahead of the TXV, closes. The discharge solenoid valve, in the compressor discharge line, opens. The liquid refrigerant leaves the TXV with the sudden pressure drop causing the liquid to expand to a vapor and absorbing the heat from the supply air going through the evaporator coil. The refrigerant vapor then travels to the compressor where it is elevated to a higher pressure and temperature. The refrigerant next carries the heat to a parallel path between the outside condenser coil and a bypass circuit. Some of the heat is rejected outdoors. The ratio of heat rejected outdoors versus indoors is controlled by an outdoor fan motor controller (OFMC) that monitors the two-phase temperature and varies the fan speed. This 2-phase refrigerant vapor is then sent to the reheat coil. As the refrigerant travels through the reheat coil it condenses into a subcooled liquid where the process repeats itself.

R	AC	D	Y	B	090	A	C	F	15	2	A	A	***
1	23	4	5	6	789	10	11	12	13 14	15	16	17	18 19 20

1—Brand

R = Rheem

2, 3—Unit Type

AC = Packaged AC

4—Cabinet Type

D = Medium Commercial

5—Refrigerant

Y = R-454B

6—Efficiency Level

B = Standard Efficiency

7, 8, 9—Capacity

090 = 7.5 ton

102 = 8.5 ton

120 = 10 ton

150 = 12.5 ton

10—Major series

A = 1st Design

11—Voltage

C = 3 PH, 208-230V, 60 Hz

D = 3 PH, 460V, 60 Hz

Y = 3 PH, 575V, 60 Hz

12—Drive

F = Belt Drive – VFD Low

G = Belt Drive – VFD Medium

H = Belt Drive – VFD High

13, 14—Heat Capacity

00 = No Heat

10 = 10 kW

15 = 15 kW

20 = 20 kW

30 = 30 kW

40 = 40 kW

15—Number of stages

0 = No stages

1 = 1 stage

2 = 2 stage

16—Control

A = Core Command

B = Core Command &
Comfort Alert

C = ClearControl

D = ClearControl &
Comfort Alert

17—Minor series

A = 1st Design

18, 19, 20—Option Code

See next page

FACTORY INSTALLED OPTION CODES FOR RACD (7.5 TO 12.5 TON)

18					19			20			
LV = Louver protection					LF = Low Ambient / Freeze Stat			EC = Economizer			
RH ¹ = HumidiDry/HGRH (Hot Gas Reheat)					NP = Non-powered Convenience Outlet			SS = Supply Smoke			
								RS = Return Smoke			
HA = Hinged Access											
CC = Coil Coating											
Option code character highlighted below											
A	None				A	None		0	None		
B	LV				B	LF		1	EC		
C	HA				C	NP		2	RS		
D	LV	HA			D	LF	NP	3	EC	RS	
E	LV	CC						4	SS	RS	
F	LV	HA	CC					5	EC	SS	RS
N	RH										
P	LV	RH									
Q	RH	HA									
R	LV	RH	CC								
S	LV	RH	HA								
T	LV	RH	HA	CC							


¹Only available with ClearControl.

Instructions for Factory Installed Option(s) Selection

Note: Three characters following the model number will be utilized to designate a factory-installed option or combination of options. If no factory option(s) is required, "AAO" follows the model number.

- **Step 1:** In the table above, based on the desired features, choose option code character from highlighted options on the left side under the number 18. For example, the option code character "E" has Louver protection and Coil Coating.
- **Step 2:** In the table above, based on the desired features, choose option code character from highlighted options on the left side under the number 19. For example, the option code character "D" has Low Ambient / Freeze Stat and Non-powered convenience outlet.
- **Step 3:** In the table above, based on the desired features, choose option code character from highlighted options on the left side under the number 20. For example, the option code character "3" has Economizer and Return Smoke.
- The resulting option code from examples above is: "ED3"
- **Step 4:** Add your option code selection to the end of model number

◦ Example: RACDYB090ACF150AA ED3 = RACDYB090ACF150AAED3

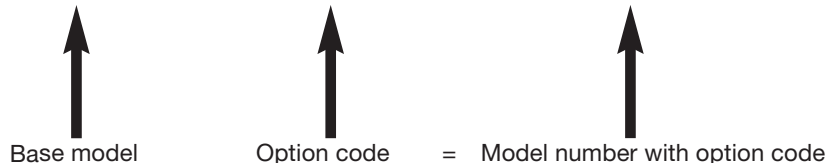

To select an RACD Cooling and Heating unit to meet a job requirement, follow this procedure, with example, using data supplied in this specification sheet.

1. DETERMINE COOLING AND HEATING REQUIREMENTS AND SPECIFIC OPERATING CONDITIONS FROM PLANS AND SPECS.

Example:

Voltage—	230 V – 3 Phase – 60 Hz
Total Cooling Capacity—	118,000 Btu/h [34.57 kW]
Sensible Cooling Capacity—	79,600 Btu/h [23.32 kW]
Heating Capacity—	150,000 Btu/h [40 kW]
*Condenser Entering Air—	95°F [35.0°C] DB
*Evaporator Mixed Air Entering—	65°F [18.3°C] WB
	78°F [25.6°C] DB
*Indoor Air Flow (vertical)—	3600 CFM [1699 L/s]
*External Static Pressure—	0.40 in. WG [.10 kPa]

2. SELECT UNIT TO MEET COOLING REQUIREMENTS.

Since total cooling is within the range of a nominal 10 ton [35.1 kW] unit, enter cooling performance table at 95°F [35.0°C] DB condenser inlet air. Interpolate between 63°F [17.2°C] WB and 67°F [19.4°C] to determine total and sensible capacity and power input for 65°F [18.3°C] WB evaporator inlet air at 3750 CFM [1770 L/s] indoor air flow (table basis):

Total Cooling Capacity = 118,900 Btu/h [34.82 kW]
Sensible Cooling Capacity = 99,950 Btu/h [29.27 kW]
Power Input (Compressor and Cond. Fans) = 8,950 watts

Use formula $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$ in note to determine sensible capacity at 80°F [26.7°C] DB evaporator entering air:

$99,950 + (1.10 \times 3,600 \times (1 - 0.03) \times (78 - 80))$
Sensible Cooling Capacity = 92,268 Btu/h [27.02 kW]

3. CORRECT CAPACITIES OF STEP 2 FOR ACTUAL AIR FLOW.

Select factors from airflow correction table at 3600 CFM [1699 L/s] and apply to data obtained in step 2 to obtain gross capacity:

Total Capacity = $118,900 \times 0.98 = 116,522$ Btu/h [34.12 kW]
Sensible Capacity = $92,268 \times 0.95 = 87,655$ Btu/h [25.67 kW]
Power Input = $8,950 \times 0.99 = 8,861$ Watts

These are Gross Capacities, not corrected for blower motor heat or power.

4. DETERMINE BLOWER SPEED AND WATTS TO MEET SYSTEM DESIGN.

Enter Indoor Blower performance table at 3600 CFM [1699 L/s]. Total ESP (external static pressure) per the spec of 0.40 in. WG [.10 kPa] includes the system duct and grilles. Add from the table "Component Air Resistance," 0.076 in. WG [.02 kPa] for wet coil, 0 in. WG [.00 kPa] for downflow air flow for a total selection static pressure of 0.476 (0.5) in. WG [.12 kPa], and determine:

RPM = 771
WATTS = 1,494
DRIVE = F (Belt Drive, VFD Low Static)

5. CALCULATE INDOOR BLOWER Btu/h HEAT EFFECT FROM MOTOR WATTS, STEP 4.

$$1,576 \times 3.412 = 5,377 \text{ Btu/h [1.57 kW]}$$

6. CALCULATE NET COOLING CAPACITIES, EQUAL TO GROSS CAPACITY, STEP 3, MINUS INDOOR BLOWER MOTOR HEAT.

$$\text{Net Total Capacity} = 116,522 - 5,377 = 111,145 \text{ Btu/h [32.54 kW]}$$

$$\text{Net Sensible Capacity} = 87,655 - 5,377 = 82,278 \text{ Btu/h [24.09 kW]}$$

7. CALCULATE UNIT INPUT AND JOB EER.

$$\text{Total Power Input} = 8,861 \text{ (step 3)} + 1,576 \text{ (step 4)} = 10,437 \text{ Watts}$$

$$\text{EER} = \frac{\text{Net Total Btu/h [kW] (step 6)}}{\text{Power Input, Watts (above)}} = \frac{111,145}{10,437} = 10.65$$

8. SELECT UNIT HEATING CAPACITY.

From Heater Kit Table select kW to meet heating capacity requirement; multiply kW x 3412 to convert to Btu/h.

Use 40 kW Heater Kit

Heater Kit Model:	Heater Kit Capacity:
RXJJ-DD40CP	135,120 Btu/h [39.6 kW]

Add indoor blower heat effect (step 5) to Heater Kit Capacity to get total heating capacity:

$$135,120 + 5,377 = 140,497 \text{ Btu/h [41.1 kW]}$$

9. CHOOSE MODEL RACDYB120ACF402AA.

*NOTE: These operating conditions are typical of a commercial application in a 95°F/79°F [35°C/26°C] design area with indoor design of 76°F [24°C] DB and 50% RH and 10% ventilation air, with the unit roof mounted and centered on the zone it conditions by ducts.

[] Designates Metric Conversions

NOM. SIZES 7.5-12.5 TONS [26.4-44.0 kW]

Model RACDYB Series	090	102	120	150
Cooling Performance^A				
Gross Cooling Capacity Btu/h [kW]	88,000 [25.78]	99,000 [29.01]	118,000 [34.57]	148,000 [43.36]
EER	11.2	11.2	11.2	11.0
IEER ^B	14.8	14.8	14.8	14.2
Nominal CFM/AHRI Rated CFM [L/s]	3000/3400 [1416/1605]	3400/3300 [1604/1557]	4000/4000 [1888/1888]	5000/4025 [2360/1899]
AHRI Net Cooling Capacity Btu/h [kW]	85,000 [24.9]	96,000 [28.13]	114,000 [33.4]	142,000 [41.61]
Net Sensible Capacity Btu/h [kW]	63,750 [18.68]	72,000 [21.10]	85,500 [25.06]	106,500 [31.21]
Net Latent Capacity Btu/h [kW]	21,250 [6.23]	24,000 [7.03]	28,500 [8.35]	35,500 [10.40]
Net System Power kW	7.73	8.73	10.36	13.15
Compressor				
No./Type	1/Scroll	1/Scroll	1/Scroll	2/Tandem Scroll
No. Stages	2	2	2	2
Outdoor Sound Rating (dB)^C				
	83	81	88	87
Outdoor Coil - Fin Type				
Tube Type	Louvered	Louvered	Louvered	Louvered
MicroChannel Depth in. [mm]	MicroChannel	MicroChannel	MicroChannel	MicroChannel
Face Area sq. ft. [sq. m]	0.71 [18]	0.81 [20.6]	1 [25.4]	1 [25.4]
Rows / FPI [FPcm]	25.4 [2.36]	25.6 [2.38]	31.5 [2.93]	31.5 [2.93]
	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]	1 / 23 [9]
Indoor Coil - Fin Type				
Tube Type	Louvered	Louvered	Louvered	Louvered
MicroChannel Depth in. [mm]	MicroChannel	MicroChannel	MicroChannel	MicroChannel
Face Area sq. ft. [sq. m]	1 [25.4]	1.26 [32]	1 [25.4]	1 [25.4]
Rows / FPI [FPcm]	11 [1.02]	10.9 [1.01]	13.8 [1.28]	13.8 [1.28]
Refrigerant Control	1 / 20 [8]	1 / 20 [8]	2 / 18 [7]	2 / 18 [7]
Drain Connection No./Size in. [mm]	TX Valves	TX Valves	TX Valves	TX Valves
	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]	1/0.75 [19.05]
Outdoor Fan - Type				
No. Used/Diameter in. [mm]	Propeller	Propeller	Propeller	Propeller
Drive Type/No. Speeds	2/24 [609.6]	2/24 [609.6]	2/24 [609.6]	2/24 [609.6]
CFM [L/s]	Direct/1	Direct/1	Direct/1	Direct/1
No. Motors/HP	8000 [3775]	8000 [3775]	8500 [4011]	9000 [4247]
Motor RPM	2 at 1/5 HP	2 at 1/5 HP	2 at 1/3 HP	2 at 3/4 HP
	820	820	1075	1100
Indoor Fan - Type				
No. Used/Diameter in. [mm]	FC Centrifugal	FC Centrifugal	FC Centrifugal	FC Centrifugal
Drive Type	1/15x15 [381x381]	1/15x15 [381x381]	1/15x15 [381x381]	1/15x15 [381x381]
No. Speeds	Belt (Adjustable)	Belt (Adjustable)	Belt (Adjustable)	Belt (Adjustable)
No. Motors	2	2	2	2
Motor RPM	1	1	1	1
Motor Frame Size	1725	1725	1725	1725
	56	56	56	184
Filter - Type				
Furnished	Disposable	Disposable	Disposable	Disposable
(NO.) Size Recommended in. [mm x mm x mm]	Yes	Yes	Yes	Yes
	(4)2x20x20 [51x508x508]	(4)2x20x20 [51x508x508]	(4)2x20x20 [51x508x508]	(4)2x20x25 [51x508x635]
Refrigerant Charge Oz. [g]				
	88 [2495]	114 [3232]	171 [4848]	168 [4763]
Weights				
Net Weight lbs. [kg]	767 [348]	803 [365]	897 [407]	987 [448]
Ship Weight lbs. [kg]	806 [366]	842 [382]	936 [425]	1026 [466]

See Page 17 for Notes.

[] Designates Metric Conversions

NOTES:

- A. Cooling Performance is rated at 95°F ambient, 80°F entering dry bulb, 67°F entering wet bulb. Gross Capacity does not include the effect of fan motor heat. AHRI Capacity is net and includes the effect of fan motor heat. Units are suitable for operation to $\pm 20\%$ of nominal cfm. Units are certified in accordance with the Unitary Air Conditioner Equipment certification program, which is based on AHRI Standard 340/360.
- B. EER is rated at AHRI conditions and in accordance with DOE test procedures. Integrated Energy Efficiency Ratio (IEER) is rated in accordance with AHRI Standard 340/360.
- C. Outdoor Sound Rating shown is tested in accordance with AHRI Standard 270.

[] Designates Metric Conversions

COOLING PERFORMANCE DATA—RACDYB090

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①										
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]		3550 [1675]	3400 [1605]	2375 [1121]	3550 [1675]	3400 [1605]	2375 [1121]	3550 [1675]	3400 [1605]	2375 [1121]
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	105.0 [30.8] 60.0 [17.6] 6.4	104.1 [30.5] 58.8 [17.2] 6.4	98.4 [28.8] 50.5 [14.8] 6.2	99.4 [29.1] 70.9 [20.8] 6.4	98.6 [28.9] 69.4 [20.3] 6.4	93.2 [27.3] 59.7 [17.5] 6.2	93.8 [27.5] 81.7 [23.9] 6.4	87.9 [25.8] 68.8 [20.2] 6.2
	80 [26.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	102.5 [30.0] 59.0 [17.3] 6.7	101.7 [29.8] 57.8 [16.9] 6.7	96.1 [28.2] 49.7 [14.6] 6.5	96.9 [28.4] 69.9 [20.5] 6.7	96.1 [28.2] 68.5 [20.1] 6.6	90.9 [26.6] 58.8 [17.2] 6.5	91.3 [26.8] 80.7 [23.7] 6.6	85.6 [25.1] 68.0 [19.9] 6.4
	85 [29.4]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	100.0 [29.3] 58.0 [17.0] 7.0	99.2 [29.1] 56.8 [16.6] 7.0	93.8 [27.5] 48.8 [14.3] 6.8	94.4 [27.7] 68.9 [20.2] 7.0	93.7 [27.5] 67.5 [19.8] 6.9	88.6 [26.0] 58.0 [17.0] 6.7	88.8 [26.0] 79.8 [23.4] 6.9	83.3 [24.4] 67.2 [19.7] 6.7
	90 [32.2]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	97.6 [28.6] 57.0 [16.7] 7.3	96.8 [28.4] 55.9 [16.4] 7.3	91.5 [26.8] 48.0 [14.1] 7.1	92.0 [27.0] 67.9 [19.9] 7.3	91.3 [26.8] 66.5 [19.5] 7.2	86.2 [25.3] 57.2 [16.8] 7.1	86.4 [25.3] 78.8 [23.1] 7.2	81.0 [23.7] 66.3 [19.4] 7.0
	95 [35]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	95.1 [27.9] 56.0 [16.4] 7.6	94.4 [27.7] 54.9 [16.1] 7.6	89.2 [26.1] 47.2 [13.8] 7.4	89.5 [26.2] 66.9 [19.6] 7.6	88.8 [26.0] 65.6 [19.2] 7.6	83.9 [24.6] 56.3 [16.5] 7.4	83.9 [24.6] 77.8 [22.8] 7.6	78.7 [23.1] 65.5 [19.2] 7.3
	100 [37.8]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	92.7 [27.2] 55.1 [16.1] 8.0	91.9 [26.9] 54.0 [15.8] 8.0	86.9 [25.5] 46.4 [13.6] 7.8	87.1 [25.5] 65.9 [19.3] 8.0	86.4 [25.3] 64.6 [18.9] 7.9	81.6 [23.9] 55.5 [16.3] 7.7	81.5 [23.9] 76.8 [22.5] 7.9	76.4 [22.4] 64.7 [19.0] 7.7
	105 [40.6]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	90.2 [26.4] 54.1 [15.9] 8.4	89.5 [26.2] 53.0 [15.5] 8.4	84.6 [24.8] 45.5 [13.3] 8.1	84.6 [24.8] 65.0 [19.1] 8.3	83.9 [24.6] 63.6 [18.6] 8.3	79.3 [23.2] 54.7 [16.0] 8.1	79.0 [23.2] 75.8 [22.2] 8.3	74.1 [21.7] 63.8 [18.7] 8.1
	110 [43.3]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	87.8 [25.7] 53.1 [15.6] 8.8	87.1 [25.5] 52.0 [15.2] 8.8	82.3 [24.1] 44.7 [13.1] 8.5	82.2 [24.1] 64.0 [18.8] 8.7	81.5 [23.9] 62.7 [18.4] 8.7	77.0 [22.6] 53.9 [15.8] 8.5	76.6 [22.5] 74.8 [21.9] 8.7	71.8 [21.0] 63.0 [18.5] 8.4
	115 [46.1]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	85.3 [25.0] 52.1 [15.3] 9.2	84.6 [24.8] 51.1 [15.0] 9.2	80.0 [23.4] 43.9 [12.9] 8.9	79.7 [23.4] 63.0 [18.5] 9.2	79.1 [23.2] 61.7 [18.1] 9.1	74.7 [21.9] 53.0 [15.5] 8.9	74.1 [21.7] 73.9 [21.7] 9.1	69.5 [20.4] 62.2 [18.2] 8.9
	120 [48.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	82.8 [24.3] 51.1 [15.0] 9.7	82.2 [24.1] 50.1 [14.7] 9.6	77.7 [22.8] 43.1 [12.6] 9.4	77.2 [22.6] 62.0 [18.2] 9.6	76.6 [22.5] 60.8 [17.8] 9.6	72.4 [21.2] 52.2 [15.3] 9.3	71.6 [21.0] 71.6 [21.0] 9.6	67.2 [19.7] 61.4 [18.0] 9.3
	125 [51.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	80.4 [23.6] 50.1 [14.7] 10.1	79.7 [23.4] 49.1 [14.4] 10.1	75.4 [22.1] 42.2 [12.4] 9.8	74.8 [21.9] 61.0 [17.9] 10.1	74.2 [21.7] 59.8 [17.5] 10.0	70.1 [20.5] 51.4 [15.1] 9.8	69.2 [20.3] 69.2 [20.3] 10.0	64.9 [19.0] 60.5 [17.7] 9.7

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power—kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions

COOLING PERFORMANCE DATA—RACDYB102

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE			71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]		
CFM [L/s]			3900 [1841]	3300 [1557]	2600 [1227]	3900 [1841]	3300 [1557]	2600 [1227]	3900 [1841]	3300 [1557]	2600 [1227]
DR ①			.05	.09	.12	.05	.09	.12	.05	.09	.12
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	119.4 [35.0] 69.7 [20.4] 7.3	115.6 [33.9] 64.3 [18.8] 7.2	111.1 [32.6] 57.9 [17.0] 7.1	112.3 [32.9] 83.0 [24.3] 7.3	108.7 [31.9] 76.5 [22.4] 7.2	104.6 [30.7] 68.9 [20.2] 7.1	106.0 [31.1] 95.9 [28.1] 7.2	102.6 [30.1] 88.4 [25.9] 7.1	98.6 [28.9] 79.7 [23.4] 6.9
	80 [26.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	116.8 [34.2] 68.4 [20.0] 7.7	113.0 [33.1] 63.0 [18.5] 7.6	108.7 [31.9] 56.8 [16.6] 7.5	109.7 [32.2] 81.6 [23.9] 7.7	106.2 [31.1] 75.3 [22.1] 7.6	102.1 [29.9] 67.8 [19.9] 7.4	103.3 [30.3] 94.6 [27.7] 7.5	100.0 [29.3] 87.2 [25.6] 7.4	96.2 [28.2] 78.5 [23] 7.3
	85 [29.4]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	114.0 [33.4] 66.9 [19.6] 8.1	110.3 [32.3] 61.7 [18.1] 8.0	106.1 [31.1] 55.6 [16.3] 7.8	106.9 [31.3] 80.2 [23.5] 8.1	103.5 [30.3] 73.9 [21.7] 7.9	99.5 [29.2] 66.6 [19.5] 7.8	100.5 [29.5] 93.1 [27.3] 7.9	97.3 [28.5] 85.8 [25.1] 7.8	93.6 [27.4] 77.3 [22.7] 7.7
	90 [32.2]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	111.0 [32.5] 65.4 [19.2] 8.5	107.5 [31.5] 60.3 [17.7] 8.3	103.3 [30.3] 54.3 [15.9] 8.2	103.9 [30.5] 78.6 [23.0] 8.4	100.6 [29.5] 72.5 [21.2] 8.3	96.7 [28.3] 65.3 [19.1] 8.1	97.6 [28.6] 91.6 [26.8] 8.3	94.5 [27.7] 84.4 [24.7] 8.2	90.8 [26.6] 76.1 [22.3] 8.0
	95 [35]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	107.9 [31.6] 63.7 [18.7] 8.9	104.5 [30.6] 58.7 [17.2] 8.7	100.4 [29.4] 52.9 [15.5] 8.6	100.8 [29.5] 77.0 [22.6] 8.8	97.6 [28.6] 71.0 [20.8] 8.7	93.8 [27.5] 63.9 [18.7] 8.5	94.5 [27.7] 89.9 [26.3] 8.7	91.4 [26.8] 82.9 [24.3] 8.5	87.9 [25.8] 74.7 [21.9] 8.4
	100 [37.8]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	104.6 [30.7] 62.0 [18.2] 9.2	101.3 [29.7] 57.1 [16.7] 9.1	97.4 [28.5] 51.5 [15.1] 8.9	97.6 [28.6] 75.2 [22.0] 9.2	94.4 [27.7] 69.4 [20.3] 9.0	90.8 [26.6] 62.5 [18.3] 8.9	91.2 [26.7] 88.2 [25.8] 9.1	88.3 [25.9] 81.3 [23.8] 8.9	84.9 [24.9] 73.2 [21.5] 8.7
	105 [40.6]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	101.2 [29.7] 60.1 [17.6] 9.6	98.0 [28.7] 55.4 [16.2] 9.5	94.2 [27.6] 49.9 [14.6] 9.3	94.1 [27.6] 73.4 [21.5] 9.6	91.1 [26.7] 67.6 [19.8] 9.4	87.6 [25.7] 60.9 [17.8] 9.2	87.8 [25.7] 86.3 [25.3] 9.4	85.0 [24.9] 79.5 [23.3] 9.3	81.7 [23.9] 71.7 [21.0] 9.1
	110 [43.3]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	97.6 [28.6] 58.1 [17.0] 10.0	94.5 [27.7] 53.6 [15.7] 9.8	90.9 [26.6] 48.3 [14.2] 9.6	90.6 [26.6] 71.4 [20.9] 9.9	87.7 [25.7] 65.8 [19.3] 9.8	84.3 [24.7] 59.3 [17.4] 9.6	84.2 [24.7] 84.2 [24.7] 9.8	81.5 [23.9] 77.7 [22.8] 9.7	78.4 [23.0] 70.0 [20.5] 9.5
	115 [46.1]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	93.9 [27.5] 56.1 [16.4] 10.4	90.9 [26.6] 51.7 [15.2] 10.2	87.4 [25.6] 46.6 [13.7] 10.0	86.8 [25.4] 69.3 [20.3] 10.3	84.1 [24.6] 63.9 [18.7] 10.2	80.8 [23.7] 57.6 [16.9] 10.0	80.5 [23.6] 80.5 [23.6] 10.2	77.9 [22.8] 75.8 [22.2] 10.0	74.9 [22.0] 68.3 [20.0] 9.8
	120 [48.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	90.0 [26.4] 53.9 [15.8] 10.7	87.2 [25.6] 49.7 [14.6] 10.6	83.8 [24.6] 44.8 [13.1] 10.4	83.0 [24.3] 67.2 [19.7] 10.7	80.3 [23.5] 61.9 [18.1] 10.5	77.2 [22.6] 55.8 [16.4] 10.3	76.6 [22.5] 76.6 [22.5] 10.6	74.1 [21.7] 73.8 [21.6] 10.4	71.3 [20.9] 66.5 [19.5] 10.2
	125 [51.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	86.0 [25.2] 51.6 [15.1] 11.1	83.2 [24.4] 47.6 [14.0] 10.9	80.0 [23.4] 42.9 [12.6] 10.7	78.9 [23.1] 64.9 [19.0] 11.1	76.4 [22.4] 59.8 [17.5] 10.9	73.4 [21.5] 53.9 [15.8] 10.7	72.6 [21.3] 72.6 [21.3] 10.9	70.2 [20.6] 70.2 [20.6] 10.8	67.5 [19.8] 64.6 [18.9] 10.6

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

COOLING PERFORMANCE DATA—RACDYB120

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		4925 [2324]	4000 [1888]	3275 [1546]	4925 [2324]	4000 [1888]	3275 [1546]	4925 [2324]	4000 [1888]	3275 [1546]	
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total kBtu/h [kW]	151.0 [44.3]	144.9 [42.5]	140.1 [41.1]	141.7 [41.5]	136.0 [39.9]	131.5 [38.5]	134.0 [39.3]	128.5 [37.7]	124.3 [36.4]
		Sens kBtu/h [kW]	89.7 [26.3]	80.9 [23.7]	74.1 [21.7]	109.5 [32.1]	98.8 [29]	90.4 [26.5]	130.8 [38.3]	118.1 [34.6]	108.1 [31.7]
		Power	9.3	9.1	9.0	9.2	9.0	8.9	9.1	8.9	8.7
	80 [26.7]	Total kBtu/h [kW]	147.9 [43.3]	141.9 [41.6]	137.3 [40.2]	138.6 [40.6]	133.0 [39.0]	128.6 [37.7]	130.9 [38.4]	125.6 [36.8]	121.4 [35.6]
		Sens kBtu/h [kW]	88.4 [25.9]	79.8 [23.4]	73.0 [21.4]	108.2 [31.7]	97.6 [28.6]	89.4 [26.2]	129.5 [38.0]	116.9 [34.3]	107.0 [31.4]
		Power	9.7	9.5	9.3	9.6	9.4	9.2	9.5	9.3	9.1
	85 [29.4]	Total kBtu/h [kW]	144.6 [42.4]	138.8 [40.7]	134.2 [39.3]	135.3 [39.7]	129.8 [38.0]	125.6 [36.8]	127.6 [37.4]	122.4 [35.9]	118.4 [34.7]
		Sens kBtu/h [kW]	86.9 [25.5]	78.5 [23.0]	71.8 [21.0]	106.7 [31.3]	96.3 [28.2]	88.2 [25.8]	127.6 [37.4]	115.6 [33.9]	105.8 [31.0]
		Power	10.1	9.9	9.7	10.0	9.8	9.6	9.8	9.6	9.5
	90 [32.2]	Total kBtu/h [kW]	141.1 [41.4]	135.4 [39.7]	130.9 [38.4]	131.8 [38.6]	126.5 [37.1]	122.3 [35.8]	124.1 [36.4]	119.1 [34.9]	115.1 [33.7]
		Sens kBtu/h [kW]	85.4 [25.0]	77.0 [22.6]	70.5 [20.7]	105.1 [30.8]	94.9 [27.8]	86.9 [25.5]	124.1 [36.4]	114.2 [33.5]	104.5 [30.6]
Power		10.4	10.2	10.1	10.4	10.1	10.0	10.2	10.0	9.8	
95 [35]	Total kBtu/h [kW]	137.4 [40.3]	131.8 [38.6]	127.5 [37.4]	128.1 [37.5]	122.9 [36.0]	118.8 [34.8]	120.3 [35.3]	115.5 [33.9]	111.7 [32.7]	
	Sens kBtu/h [kW]	83.6 [24.5]	75.5 [22.1]	69.1 [20.3]	103.4 [30.3]	93.3 [27.3]	85.4 [25.0]	120.3 [35.3]	112.6 [33.0]	103.1 [30.2]	
	Power	10.8	10.6	10.4	10.7	10.5	10.3	10.6	10.4	10.2	
100 [37.8]	Total kBtu/h [kW]	133.4 [39.1]	128.1 [37.5]	123.8 [36.3]	124.1 [36.4]	119.1 [34.9]	115.2 [33.8]	116.4 [34.1]	111.7 [32.7]	108.0 [31.7]	
	Sens kBtu/h [kW]	81.7 [23.9]	73.8 [21.6]	67.5 [19.8]	101.5 [29.7]	91.6 [26.8]	83.9 [24.6]	116.4 [34.1]	110.9 [32.5]	101.5 [29.7]	
	Power	11.2	11.0	10.8	11.1	10.9	10.7	11.0	10.8	10.6	
105 [40.6]	Total kBtu/h [kW]	129.3 [37.9]	124.1 [36.4]	120.0 [35.2]	120.0 [35.2]	115.1 [33.7]	111.3 [32.6]	112.3 [32.9]	107.7 [31.6]	104.2 [30.5]	
	Sens kBtu/h [kW]	79.7 [23.4]	72.0 [21.1]	65.9 [19.3]	99.5 [29.2]	89.8 [26.3]	82.2 [24.1]	112.3 [32.9]	107.7 [31.6]	99.8 [29.2]	
	Power	11.6	11.3	11.2	11.5	11.3	11.1	11.3	11.1	10.9	
110 [43.3]	Total kBtu/h [kW]	124.9 [36.6]	119.9 [35.1]	115.9 [34.0]	115.6 [33.9]	111.0 [32.5]	107.3 [31.4]	107.9 [31.6]	103.5 [30.3]	100.1 [29.3]	
	Sens kBtu/h [kW]	77.6 [22.7]	70.0 [20.5]	64.1 [18.8]	97.3 [28.5]	87.9 [25.8]	80.4 [23.6]	107.9 [31.6]	103.5 [30.3]	98.1 [28.8]	
	Power	12.0	11.7	11.5	11.9	11.6	11.4	11.7	11.5	11.3	
115 [46.1]	Total kBtu/h [kW]	120.4 [35.3]	115.5 [33.9]	111.7 [32.7]	111.1 [32.6]	106.6 [31.2]	103.1 [30.2]	103.3 [30.3]	99.2 [29.1]	95.9 [28.1]	
	Sens kBtu/h [kW]	75.2 [22.0]	67.9 [19.9]	62.2 [18.2]	95.0 [27.8]	85.8 [25.1]	78.5 [23.0]	103.3 [30.3]	99.2 [29.1]	95.9 [28.1]	
	Power	12.3	12.1	11.9	12.2	12.0	11.8	12.1	11.9	11.7	
120 [48.9]	Total kBtu/h [kW]	115.6 [33.9]	110.9 [32.5]	107.3 [31.4]	106.3 [31.2]	102.0 [29.9]	98.6 [28.9]	98.5 [28.9]	94.6 [27.7]	91.5 [26.8]	
	Sens kBtu/h [kW]	72.8 [21.3]	65.7 [19.3]	60.1 [17.6]	92.6 [27.1]	83.5 [24.5]	76.5 [22.4]	98.5 [28.9]	94.6 [27.7]	91.5 [26.8]	
	Power	12.7	12.5	12.3	12.6	12.4	12.2	12.5	12.2	12.0	
125 [51.7]	Total kBtu/h [kW]	110.6 [32.4]	106.1 [31.1]	102.6 [30.1]	101.3 [29.7]	97.2 [28.5]	94.0 [27.5]	93.5 [27.4]	89.8 [26.3]	86.8 [25.4]	
	Sens kBtu/h [kW]	70.2 [20.6]	63.3 [18.6]	58.0 [17.0]	90.0 [26.4]	81.2 [23.8]	74.3 [21.8]	93.5 [27.4]	89.8 [26.3]	86.8 [25.4]	
	Power	13.1	12.8	12.6	13.0	12.7	12.5	12.9	12.6	12.4	

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power—kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding [1.10 x CFM x (1 – DR) x (dbE – 80)].

[] Designates Metric Conversions

COOLING PERFORMANCE DATA—RACDYB150

ENTERING INDOOR AIR @ 80°F [26.7°C] dbE ①											
wbE		71°F [21.7°C]			67°F [19.4°C]			63°F [17.2°C]			
CFM [L/s]		6000 [2832]	4025 [1900]	4000 [1888]	6000 [2832]	4025 [1900]	4000 [1888]	6000 [2832]	4025 [1900]	4000 [1888]	
DR ①		.05	.09	.12	.05	.09	.12	.05	.09	.12	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	75 [23.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	193.6 [56.7] 116.5 [34.1] 7.5	177.8 [52.1] 94.8 [27.8] 7.2	177.6 [52.1] 94.5 [27.7] 7.2	181.3 [53.1] 136.8 [40.1] 7.8	166.5 [48.8] 111.3 [32.6] 7.5	166.3 [48.7] 111.0 [32.5] 7.5	170.3 [49.9] 155.5 [45.6] 7.3	156.3 [45.8] 126.6 [37.1] 7.0	156.1 [45.8] 126.2 [37.0] 7.0
	80 [26.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	189.3 [55.5] 114.1 [33.4] 7.9	173.8 [50.9] 92.9 [27.2] 7.6	173.6 [50.9] 92.6 [27.1] 7.6	177.0 [51.9] 134.4 [39.4] 8.3	162.5 [47.6] 109.4 [32.1] 7.9	162.3 [47.6] 109.0 [31.9] 7.9	165.9 [48.6] 153.2 [44.9] 7.7	152.3 [44.6] 124.6 [36.5] 7.4	152.2 [44.6] 124.3 [36.4] 7.4
	85 [29.4]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	184.9 [54.2] 111.6 [32.7] 8.4	169.8 [49.8] 90.8 [26.6] 8.0	169.6 [49.7] 90.6 [26.6] 8.0	172.6 [50.6] 131.9 [38.7] 8.7	158.5 [46.5] 107.3 [31.4] 8.3	158.3 [46.4] 107.0 [31.4] 8.3	161.5 [47.3] 150.7 [44.2] 8.2	148.3 [43.5] 122.6 [35.9] 7.8	148.2 [43.4] 122.3 [35.8] 7.8
	90 [32.2]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	180.5 [52.9] 109.1 [32.0] 8.8	165.7 [48.6] 88.7 [26.0] 8.4	165.5 [48.5] 88.5 [25.9] 8.4	168.1 [49.3] 129.3 [37.9] 9.1	154.4 [45.3] 105.2 [30.8] 8.8	154.2 [45.2] 104.9 [30.7] 8.8	157.1 [46.0] 148.1 [43.4] 8.6	144.2 [42.3] 120.5 [35.3] 8.2	144.1 [42.2] 120.2 [35.2] 8.2
	95 [35]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	175.9 [51.6] 106.4 [31.2] 9.2	161.5 [47.3] 86.6 [25.4] 8.8	161.4 [47.3] 86.3 [25.3] 8.8	163.6 [47.9] 126.6 [37.1] 9.6	150.2 [44.0] 103.0 [30.2] 9.2	150.0 [44.0] 102.8 [30.1] 9.2	152.6 [44.7] 145.4 [42.6] 9.0	140.1 [41.1] 118.3 [34.7] 8.7	139.9 [41.0] 118.0 [34.6] 8.7
	100 [37.8]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	171.3 [50.2] 103.6 [30.4] 9.7	157.3 [46.1] 84.3 [24.7] 9.3	157.1 [46.0] 84.0 [24.6] 9.3	159.0 [46.6] 123.8 [36.3] 10.0	146.0 [42.8] 100.8 [29.5] 9.6	145.8 [42.7] 100.5 [29.5] 9.6	148.0 [43.4] 142.6 [41.8] 9.5	135.8 [39.8] 116.0 [34.0] 9.1	135.7 [39.8] 115.7 [33.9] 9.1
	105 [40.6]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	166.7 [48.9] 100.7 [29.5] 10.1	153.0 [44.8] 81.9 [24.0] 9.7	152.9 [44.8] 81.7 [23.9] 9.7	154.4 [45.3] 120.9 [35.4] 10.4	141.7 [41.5] 98.4 [28.8] 10.0	141.6 [41.5] 98.1 [28.8] 10.0	143.3 [42.0] 139.7 [40.9] 9.9	131.6 [38.6] 113.7 [33.3] 9.5	131.4 [38.5] 113.3 [33.2] 9.5
	110 [43.3]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	161.9 [47.5] 97.6 [28.6] 10.5	148.7 [43.6] 79.4 [23.3] 10.1	148.5 [43.5] 79.2 [23.2] 10.1	149.6 [43.8] 117.9 [34.6] 10.9	137.4 [40.3] 95.9 [28.1] 10.4	137.2 [40.2] 95.7 [28.0] 10.4	138.6 [40.6] 136.7 [40.1] 10.3	127.2 [37.3] 111.2 [32.6] 9.9	127.1 [37.3] 110.9 [32.5] 9.9
	115 [46.1]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	157.1 [46.0] 94.5 [27.7] 11.0	144.3 [42.3] 76.9 [22.5] 10.5	144.1 [42.2] 76.7 [22.5] 10.5	144.8 [42.4] 114.8 [33.6] 11.3	132.9 [39.0] 93.4 [27.4] 10.8	132.8 [38.9] 93.1 [27.3] 10.8	133.8 [39.2] 133.5 [39.1] 10.8	122.8 [36.0] 108.7 [31.9] 10.3	122.7 [36.0] 108.3 [31.7] 10.3
	120 [48.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	152.3 [44.6] 91.2 [26.7] 11.4	139.8 [41.0] 74.2 [21.7] 10.9	139.6 [40.9] 74.0 [21.7] 10.9	139.9 [41.0] 111.5 [32.7] 11.7	128.5 [37.7] 90.7 [26.6] 11.3	128.3 [37.6] 90.5 [26.5] 11.2	128.9 [37.8] 128.9 [37.8] 11.2	118.3 [34.7] 106.0 [31.1] 10.7	118.2 [34.6] 105.7 [31.0] 10.7
	125 [51.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	147.3 [43.2] 87.9 [25.8] 11.8	135.2 [39.6] 71.5 [21.0] 11.3	135.1 [39.6] 71.3 [20.9] 11.3	135.0 [39.6] 108.2 [31.7] 12.2	123.9 [36.3] 88.0 [25.8] 11.7	123.8 [36.3] 87.7 [25.7] 11.7	123.9 [36.3] 123.9 [36.3] 11.6	113.8 [33.4] 103.3 [30.3] 11.2	113.7 [33.3] 103.0 [30.2] 11.2

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 80°F [27°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE)—RACDYB090

ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①											
wbE			65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]		
CFM [L/s]			2190 [1034]	1825 [861]	1460 [689]	2190 [1034]	1825 [861]	1460 [689]	2190 [1034]	1825 [861]	1460 [689]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	28.8 [8.4]	27.8 [8.1]	26.8 [7.8]	25.4 [7.4]	24.5 [7.2]	23.6 [6.9]	24.6 [7.2]	23.8 [7.0]	22.9 [6.7]
		Sens kBtu/h [kW]	3.2 [0.9]	2.9 [0.8]	2.6 [0.8]	3.8 [1.1]	3.5 [1.0]	3.1 [0.9]	7.3 [2.1]	6.7 [2.0]	6.1 [1.8]
		Power [kW]	4.5	4.4	4.4	4.5	4.4	4.4	4.5	4.4	4.4
	65 [18.3]	Total kBtu/h [kW]	28.6 [8.4]	27.6 [8.1]	26.6 [7.8]	25.2 [7.4]	24.3 [7.1]	23.4 [6.9]	24.4 [7.2]	23.6 [6.9]	22.7 [6.7]
		Sens kBtu/h [kW]	3.1 [0.9]	2.9 [0.8]	2.6 [0.8]	3.8 [1.1]	3.4 [1.0]	3.1 [0.9]	7.3 [2.1]	6.7 [2.0]	6.1 [1.8]
		Power [kW]	4.5	4.4	4.4	4.5	4.5	4.4	4.5	4.4	4.4
	70 [21.1]	Total kBtu/h [kW]	28.3 [8.3]	27.3 [8.0]	26.3 [7.7]	24.8 [7.3]	24.0 [7.0]	23.1 [6.8]	24.1 [7.1]	23.3 [6.8]	22.4 [6.6]
		Sens kBtu/h [kW]	3.0 [0.9]	2.7 [0.8]	2.5 [0.7]	3.6 [1.1]	3.3 [1.0]	3.0 [0.9]	7.1 [2.1]	6.5 [1.9]	5.9 [1.7]
		Power [kW]	4.5	4.5	4.4	4.6	4.5	4.4	4.5	4.5	4.4
	75 [23.9]	Total kBtu/h [kW]	27.8 [8.2]	26.8 [7.9]	25.9 [7.6]	24.4 [7.1]	23.5 [6.9]	22.7 [6.6]	23.6 [6.9]	22.8 [6.7]	22.0 [6.4]
		Sens kBtu/h [kW]	2.7 [0.8]	2.4 [0.7]	2.2 [0.6]	3.3 [1.0]	3.0 [0.9]	2.7 [0.8]	6.9 [2.0]	6.3 [1.8]	5.7 [1.7]
		Power [kW]	4.6	4.5	4.4	4.6	4.5	4.4	4.6	4.5	4.4
	80 [26.7]	Total kBtu/h [kW]	27.2 [8.0]	26.3 [7.7]	25.3 [7.4]	23.8 [7.0]	23.0 [6.7]	22.1 [6.5]	23.1 [6.8]	22.3 [6.5]	21.4 [6.3]
		Sens kBtu/h [kW]	2.3 [0.7]	2.1 [0.6]	1.9 [0.5]	2.9 [0.8]	2.6 [0.8]	2.4 [0.7]	6.4 [1.9]	5.9 [1.7]	5.3 [1.6]
		Power [kW]	4.6	4.5	4.4	4.6	4.5	4.5	4.6	4.5	4.4
	85 [29.4]	Total kBtu/h [kW]	26.5 [7.8]	25.6 [7.5]	24.6 [7.2]	23.1 [6.8]	22.3 [6.5]	21.5 [6.3]	22.3 [6.5]	21.6 [6.3]	20.8 [6.1]
		Sens kBtu/h [kW]	1.7 [0.5]	1.6 [0.5]	1.4 [0.4]	2.3 [0.7]	2.1 [0.6]	1.9 [0.6]	5.9 [1.7]	5.4 [1.6]	4.9 [1.4]
		Power [kW]	4.6	4.6	4.5	4.7	4.6	4.5	4.6	4.6	4.5
	90 [32.2]	Total kBtu/h [kW]	25.7 [7.5]	24.8 [7.3]	23.9 [7.0]	22.2 [6.5]	21.5 [6.3]	20.7 [6.1]	21.5 [6.3]	20.7 [6.1]	20.0 [5.9]
		Sens kBtu/h [kW]	1.0 [0.3]	0.9 [0.3]	0.8 [0.2]	1.6 [0.5]	1.5 [0.4]	1.4 [0.4]	5.2 [1.5]	4.8 [1.4]	4.3 [1.3]
		Power [kW]	4.7	4.6	4.5	4.7	4.6	4.5	4.7	4.6	4.5

GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RACDYB090

ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①											
wbE			65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]		
CFM [L/s]			3600 [1699]	3150 [1487]	2400 [1133]	3600 [1699]	3150 [1487]	2400 [1133]	3600 [1699]	3150 [1487]	2400 [1133]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	48.5 [14.2]	47.3 [13.9]	45.3 [13.3]	32.0 [9.4]	31.2 [9.1]	29.9 [8.8]	31.1 [9.1]	30.3 [8.9]	29.0 [8.5]
		Sens kBtu/h [kW]	4.1 [1.2]	3.8 [1.1]	3.4 [1.0]	1.9 [0.5]	1.8 [0.5]	1.6 [0.5]	7.6 [2.2]	7.2 [2.1]	6.4 [1.9]
		Power	7.0	6.9	6.7	6.9	6.8	6.7	7.0	6.9	6.7
	70 [21.1]	Total kBtu/h [kW]	50.8 [14.9]	49.6 [14.5]	47.4 [13.9]	34.3 [10.1]	33.5 [9.8]	32.0 [9.4]	33.4 [9.8]	32.5 [9.5]	31.1 [9.1]
		Sens kBtu/h [kW]	6.9 [2.0]	6.5 [1.9]	5.7 [1.7]	4.6 [1.4]	4.4 [1.3]	3.9 [1.1]	10.4 [3.1]	9.8 [2.9]	8.7 [2.5]
		Power	6.9	6.8	6.6	6.8	6.7	6.6	6.9	6.8	6.6
	80 [26.7]	Total kBtu/h [kW]	51.6 [15.1]	50.3 [14.7]	48.1 [14.1]	35.1 [10.3]	34.2 [10.0]	32.7 [9.6]	34.1 [10.0]	33.3 [9.8]	31.8 [9.3]
Sens kBtu/h [kW]		8.0 [2.4]	7.5 [2.2]	6.7 [2.0]	5.8 [1.7]	5.4 [1.6]	4.8 [1.4]	11.6 [3.4]	10.9 [3.2]	9.7 [2.8]	
Power		6.9	6.8	6.7	6.8	6.8	6.6	6.9	6.8	6.7	
90 [32.2]	Total kBtu/h [kW]	50.8 [14.9]	49.6 [14.5]	47.4 [13.9]	34.3 [10.1]	33.5 [9.8]	32.0 [9.4]	33.4 [9.8]	32.5 [9.5]	31.1 [9.1]	
	Sens kBtu/h [kW]	7.6 [2.2]	7.1 [2.1]	6.3 [1.8]	5.3 [1.6]	5.0 [1.5]	4.4 [1.3]	11.1 [3.3]	10.4 [3.1]	9.3 [2.7]	
	Power	7.0	6.9	6.8	7.0	6.9	6.7	7.0	6.9	6.8	
100 [37.8]	Total kBtu/h [kW]	48.5 [14.2]	47.3 [13.9]	45.3 [13.3]	32.0 [9.4]	31.2 [9.1]	29.9 [8.7]	31.1 [9.1]	30.3 [8.9]	29.0 [8.5]	
	Sens kBtu/h [kW]	5.5 [1.6]	5.1 [1.5]	4.6 [1.3]	3.2 [0.9]	3.0 [0.9]	2.7 [0.8]	9.0 [2.6]	8.5 [2.5]	7.5 [2.2]	
	Power	7.2	7.1	7.0	7.2	7.1	6.9	7.2	7.1	7	
110 [43.3]	Total kBtu/h [kW]	44.7 [13.1]	43.6 [12.8]	41.7 [12.2]	28.2 [8.3]	27.5 [8.0]	26.3 [7.7]	27.2 [8.0]	26.5 [7.8]	25.4 [7.4]	
	Sens kBtu/h [kW]	1.8 [0.5]	1.6 [0.5]	1.5 [0.4]	-0.5 [-0.1]	-0.5 [-0.1]	-0.4 [-0.1]	5.3 [1.6]	5.0 [1.5]	4.4 [1.3]	
	Power	7.5	7.4	7.3	7.5	7.4	7.2	7.5	7.4	7.3	
120 [48.9]	Total kBtu/h [kW]	39.3 [11.5]	38.3 [11.2]	36.6 [10.7]	22.8 [6.7]	22.2 [6.5]	21.2 [6.2]	21.8 [6.4]	21.3 [6.2]	20.3 [6.0]	
	Sens kBtu/h [kW]	-3.6 [-1.1]	-3.4 [-1.0]	-3.0 [-0.9]	-5.8 [-1.7]	-5.5 [-1.6]	-4.9 [-1.4]	0.0 [0.0]	0.0 [0.0]	0.0 [0.0]	
	Power	7.9	7.8	7.7	7.9	7.8	7.6	7.9	7.8	7.7	

DR —Depression ratio
dbE —Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE)–RACDYB102

ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①											
wbE		65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]			
CFM [L/s]		2420 [1142]	2015 [951]	1610 [760]	2420 [1142]	2015 [951]	1610 [760]	2420 [1142]	2015 [951]	1610 [760]	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	38.5 [11.3] 5.2 [1.5] 5.3	37.1 [10.9] 4.7 [1.4] 5.2	35.8 [10.5] 4.3 [1.3] 5.1	32.6 [9.5] 5.1 [1.5] 5.1	31.4 [9.2] 4.6 [1.4] 5.1	30.3 [8.9] 4.2 [1.2] 5.0	28.3 [8.3] 6.9 [2.0] 5.0	27.3 [8.0] 6.3 [1.8] 4.9	26.3 [7.7] 5.7 [1.7] 4.8
	65 [18.3]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	37.9 [11.1] 4.2 [1.2] 5.4	36.5 [10.7] 3.8 [1.1] 5.3	35.2 [10.3] 3.5 [1.0] 5.2	31.9 [9.3] 4.1 [1.2] 5.2	30.8 [9.0] 3.7 [1.1] 5.1	29.7 [8.7] 3.4 [1.0] 5.0	27.6 [8.1] 5.9 [1.7] 5.0	26.7 [7.8] 5.4 [1.6] 5.0	25.7 [7.5] 4.9 [1.4] 4.9
	70 [21.1]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	37.2 [10.9] 3.4 [1.0] 5.5	35.8 [10.5] 3.1 [0.9] 5.4	34.5 [10.1] 2.8 [0.8] 5.3	31.2 [9.1] 3.3 [1.0] 5.3	30.1 [8.8] 3.0 [0.9] 5.2	29.0 [8.5] 2.7 [0.8] 5.1	26.9 [7.9] 5.1 [1.5] 5.1	26.0 [7.6] 4.7 [1.4] 5.0	25.0 [7.3] 4.2 [1.2] 4.9
	75 [23.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	36.4 [10.7] 2.9 [0.8] 5.5	35.1 [10.3] 2.6 [0.8] 5.4	33.8 [9.9] 2.4 [0.7] 5.3	30.5 [8.9] 2.7 [0.8] 5.3	29.4 [8.6] 2.5 [0.7] 5.3	28.3 [8.3] 2.3 [0.7] 5.2	26.2 [7.7] 4.5 [1.3] 5.2	25.3 [7.4] 4.2 [1.2] 5.1	24.4 [7.1] 3.8 [1.1] 5.0
	80 [26.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	35.6 [10.4] 2.5 [0.7] 5.5	34.4 [10.1] 2.3 [0.7] 5.4	33.1 [9.7] 2.1 [0.6] 5.4	29.7 [8.7] 2.4 [0.7] 5.4	28.6 [8.4] 2.2 [0.6] 5.3	27.6 [8.1] 2.0 [0.6] 5.2	25.4 [7.4] 4.2 [1.2] 5.2	24.5 [7.2] 3.8 [1.1] 5.1	23.6 [6.9] 3.5 [1.0] 5.0
	85 [29.4]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	34.8 [10.2] 2.3 [0.7] 5.6	33.5 [9.8] 2.1 [0.6] 5.5	32.3 [9.5] 1.9 [0.6] 5.4	28.8 [8.4] 2.2 [0.6] 5.4	27.8 [8.1] 2.0 [0.6] 5.3	26.8 [7.9] 1.8 [0.5] 5.2	24.6 [7.2] 4.0 [1.2] 5.2	23.7 [6.9] 3.7 [1.1] 5.1	22.8 [6.7] 3.3 [1.0] 5.0
	90 [32.2]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	33.9 [9.9] 2.3 [0.7] 5.6	32.7 [9.6] 2.1 [0.6] 5.5	31.5 [9.2] 1.9 [0.6] 5.4	27.9 [8.2] 2.2 [0.6] 5.4	27.0 [7.9] 2.0 [0.6] 5.3	26.0 [7.6] 1.8 [0.5] 5.2	23.7 [6.9] 4.0 [1.2] 5.2	22.8 [6.7] 3.7 [1.1] 5.1	22.0 [6.4] 3.3 [1.0] 5.1

GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)–RACDYB102

ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①											
wbE		65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]			
CFM [L/s]		4080 [1926]	3375 [1593]	2720 [1284]	4080 [1926]	3375 [1593]	2720 [1284]	4080 [1926]	3375 [1593]	2720 [1284]	
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	69.8 [20.5] 17.7 [5.2] 7.1	67.3 [19.7] 16.1 [4.7] 6.9	64.9 [19.0] 14.7 [4.3] 6.8	50.2 [14.7] 14.6 [4.3] 7.0	48.3 [14.2] 13.3 [3.9] 6.9	46.6 [13.7] 12.1 [3.5] 6.8	50.1 [14.7] 22.7 [6.6] 7.1	48.2 [14.1] 20.6 [6.0] 6.9	46.5 [13.6] 18.8 [5.5] 6.8
	70 [21.1]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	64.5 [18.9] 12.5 [3.7] 7.1	62.1 [18.2] 11.4 [3.3] 7.0	60.0 [17.6] 10.3 [3.0] 6.9	44.9 [13.1] 9.4 [2.8] 7.1	43.2 [12.7] 8.6 [2.5] 6.9	41.7 [12.2] 7.8 [2.3] 6.8	44.8 [13.1] 17.4 [5.1] 7.1	43.1 [12.6] 15.9 [4.7] 7.0	41.6 [12.2] 14.5 [4.2] 6.9
	80 [26.7]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	60.8 [17.8] 9.0 [2.6] 7.3	58.5 [17.2] 8.2 [2.4] 7.1	56.5 [16.5] 7.4 [2.2] 7.0	41.1 [12.1] 5.9 [1.7] 7.2	39.6 [11.6] 5.3 [1.6] 7.1	38.2 [11.2] 4.9 [1.4] 7.0	41.0 [12.0] 13.9 [4.1] 7.3	39.5 [11.6] 12.7 [3.7] 7.2	38.1 [11.2] 11.5 [3.4] 7.0
	90 [32.2]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	58.6 [17.2] 7.1 [2.1] 7.5	56.4 [16.5] 6.5 [1.9] 7.4	54.5 [16.0] 5.9 [1.7] 7.3	39.0 [11.4] 4.0 [1.2] 7.5	37.5 [11.0] 3.7 [1.1] 7.4	36.2 [10.6] 3.3 [1.0] 7.2	38.9 [11.4] 12.1 [3.5] 7.6	37.4 [11.0] 11.0 [3.2] 7.4	36.1 [10.6] 10.0 [2.9] 7.3
	100 [37.8]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	58.0 [17.0] 7.0 [2.1] 7.9	55.9 [16.4] 6.4 [1.9] 7.8	53.9 [15.8] 5.8 [1.7] 7.6	38.4 [11.2] 3.9 [1.1] 7.9	37.0 [10.8] 3.6 [1.0] 7.7	35.7 [10.4] 3.2 [0.9] 7.6	38.3 [11.2] 12.0 [3.5] 7.9	36.9 [10.8] 10.9 [3.2] 7.8	35.6 [10.4] 9.9 [2.9] 7.6
	110 [43.3]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	59.0 [17.3] 8.6 [2.5] 8.4	56.8 [16.6] 7.8 [2.3] 8.2	54.8 [16.1] 7.1 [2.1] 8.1	39.3 [11.5] 5.5 [1.6] 8.3	37.9 [11.1] 5.0 [1.5] 8.2	36.6 [10.7] 4.5 [1.3] 8.0	39.2 [11.5] 13.5 [4.0] 8.4	37.8 [11.1] 12.3 [3.6] 8.2	36.5 [10.7] 11.2 [3.3] 8.1
	120 [48.9]	Total kBtu/h [kW] Sens kBtu/h [kW] Power	61.5 [18.0] 11.8 [3.5] 8.9	59.2 [17.4] 10.8 [3.2] 8.8	57.2 [16.7] 9.8 [2.9] 8.6	41.9 [12.3] 8.7 [2.6] 8.9	40.3 [11.8] 7.9 [2.3] 8.7	38.9 [11.4] 7.2 [2.1] 8.6	41.8 [12.2] 16.8 [4.9] 8.9	40.2 [11.8] 15.3 [4.5] 8.8	38.8 [11.4] 13.9 [4.1] 8.6

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE)—RACDYB120

ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①											
wbE			65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]		
CFM [L/s]			2880 [1359]	2400 [1133]	1920 [906]	2880 [1359]	2400 [1133]	1920 [906]	2880 [1359]	2400 [1133]	1920 [906]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	39.3 [11.5]	37.9 [11.1]	36.6 [10.7]	34.0 [10.0]	32.8 [9.6]	31.6 [9.3]	29.6 [8.7]	28.5 [8.4]	27.5 [8.1]
		Sens kBtu/h [kW]	3.9 [1.1]	3.6 [1.0]	3.2 [0.9]	3.7 [1.1]	3.4 [1.0]	3.0 [0.9]	4.9 [1.4]	4.5 [1.3]	4.1 [1.2]
		Power	4.8	4.7	4.7	4.8	4.8	4.7	4.9	4.8	4.8
	65 [18.3]	Total kBtu/h [kW]	38.2 [11.2]	36.9 [10.8]	35.5 [10.4]	32.9 [9.6]	31.8 [9.3]	30.6 [9.0]	28.4 [8.3]	27.4 [8.0]	26.4 [7.7]
		Sens kBtu/h [kW]	2.5 [0.7]	2.3 [0.7]	2.1v [0.6]	2.3 [0.7]	2.1 [0.6]	1.9 [0.6]	3.5 [1.0]	3.2 [0.9]	2.9 [0.8]
		Power	4.9	4.8	4.7	4.9	4.8	4.7	5.0	4.9	4.8
	70 [21.1]	Total kBtu/h [kW]	37.5 [11.0]	36.2 [10.6]	34.8 [10.2]	32.2 [9.4]	31.1 [9.1]	29.9 [8.8]	27.7 [8.1]	26.7 [7.8]	25.8 [7.6]
		Sens kBtu/h [kW]	1.7 [0.5]	1.6 [0.5]	1.4 [0.4]	1.5 [0.4]	1.3 [0.4]	1.2 [0.4]	2.7 [0.8]	2.5 [0.7]	2.2 [0.7]
		Power	4.9	4.8	4.8	4.9	4.9	4.8	5.0	4.9	4.9
	75 [23.9]	Total kBtu/h [kW]	37.2 [10.9]	35.8 [10.5]	34.5 [10.1]	31.9 [9.3]	30.8 [9.0]	29.6 [8.7]	27.4 [8.0]	26.4 [7.7]	25.5 [7.5]
		Sens kBtu/h [kW]	1.5 [0.4]	1.4 [0.4]	1.3 [0.4]	1.3 [0.4]	1.2 [0.3]	1.1 [0.3]	2.5 [0.7]	2.3 [0.7]	2.1 [0.6]
		Power	5.0	4.9	4.8	5.0	4.9	4.9	5.1	5.0	4.9
80 [26.7]	Total kBtu/h [kW]	37.2 [10.9]	35.9 [10.5]	34.6 [10.1]	31.9 [9.4]	30.8 [9.0]	29.7 [8.7]	27.5 [8.0]	26.5 [7.8]	25.5 [7.5]	
	Sens kBtu/h [kW]	2.0 [0.6]	1.8 [0.5]	1.6 [0.5]	1.8 [0.5]	1.6 [0.5]	1.5 [0.4]	3.0 [0.9]	2.7 [0.8]	2.5 [0.7]	
	Power	5.1	5.0	4.9	5.1	5.0	4.9	5.2	5.1	5.0	
85 [29.4]	Total kBtu/h [kW]	37.7 [11.0]	36.4 [10.7]	35 [10.3]	32.4 [9.5]	31.3 [9.2]	30.1 [8.8]	27.9 [8.2]	26.9 [7.9]	26.0 [7.6]	
	Sens kBtu/h [kW]	3.0 [0.9]	2.8 [0.8]	2.5 [0.7]	2.8 [0.8]	2.6 [0.8]	2.3 [0.7]	4.0 [1.2]	3.7 [1.1]	3.4 [1.0]	
	Power	5.2	5.1	5.0	5.2	5.2	5.1	5.3	5.2	5.1	
90 [32.2]	Total kBtu/h [kW]	38.6 [11.3]	37.2 [10.9]	35.8 [10.5]	33.3 [9.7]	32.1 [9.4]	30.9 [9.1]	28.8 [8.4]	27.8 [8.1]	26.8 [7.8]	
	Sens kBtu/h [kW]	4.7 [1.4]	4.3 [1.3]	3.9 [1.2]	4.5 [1.3]	4.1 [1.2]	3.7 [1.1]	5.7 [1.7]	5.2 [1.5]	4.8 [1.4]	
	Power	5.4	5.3	5.2	5.4	5.3	5.2	5.5	5.4	5.3	

GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RACDYB120

ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①											
wbE			65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]		
CFM [L/s]			4800 [2265]	3940 [1859]	3200 [1510]	4800 [2265]	3940 [1859]	3200 [1510]	4800 [2265]	3940 [1859]	3200 [1510]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBtu/h [kW]	91.7 [26.9]	88.2 [25.8]	85.2 [25.0]	63.4 [18.6]	61.0 [17.9]	58.9 [17.3]	72.9 [21.4]	70.1 [20.5]	67.7 [19.8]
		Sens kBtu/h [kW]	21.7 [6.4]	19.7 [5.8]	18.0 [5.3]	15.5 [4.5]	14.0 [4.1]	12.8 [3.8]	26.5 [7.8]	24.0 [7.0]	21.9 [6.4]
		Power	7.7	7.6	7.5	7.6	7.5	7.3	7.7	7.6	7.4
	70 [21.1]	Total kBtu/h [kW]	77.4 [22.7]	74.4 [21.8]	71.9 [21.1]	49.1 [14.4]	47.2 [13.8]	45.6 [13.4]	58.6 [17.2]	56.3 [16.5]	54.4 [15.9]
		Sens kBtu/h [kW]	15.2 [4.5]	13.8 [4.0]	12.6 [3.7]	8.9 [2.6]	8.1 [2.4]	7.4 [2.2]	19.9 [5.8]	18.1 [5.3]	16.5 [4.8]
		Power	7.7	7.6	7.5	7.6	7.4	7.3	7.7	7.5	7.4
	80 [26.7]	Total kBtu/h [kW]	68.0 [19.9]	65.4 [19.2]	63.1 [18.5]	39.6 [11.6]	38.1 [11.2]	36.8 [10.8]	49.1 [14.4]	47.3 [13.9]	45.7 [13.4]
		Sens kBtu/h [kW]	11.2 [3.3]	10.2 [3.0]	9.3 [2.7]	5.0 [1.5]	4.5 [1.3]	4.1 [1.2]	16.0 [4.7]	14.5 [4.2]	13.2 [3.9]
		Power	7.9	7.8	7.6	7.8	7.6	7.5	7.9	7.7	7.6
	90 [32.2]	Total kBtu/h [kW]	63.4 [18.6]	61.0 [17.9]	58.9 [17.3]	35.1 [10.3]	33.7 [9.9]	32.6 [9.5]	44.6 [13.1]	42.9 [12.6]	41.4 [12.1]
		Sens kBtu/h [kW]	9.8 [2.9]	8.9 [2.6]	8.1 [2.4]	3.6 [1.0]	3.2 [0.9]	2.9 [0.9]	14.5 [4.3]	13.2 [3.9]	12.0 [3.5]
		Power	8.3	8.1	8.0	8.1	8.0	7.9	8.2	8.1	8.0
100 [37.8]	Total kBtu/h [kW]	63.7 [18.7]	61.3 [17.9]	59.2 [17.3]	35.4 [10.4]	34.0 [10.0]	32.8 [9.6]	44.9 [13.1]	43.1 [12.6]	41.7 [12.2]	
	Sens kBtu/h [kW]	11.0 [3.2]	9.9 [2.9]	9.1 [2.7]	4.7 [1.4]	4.3 [1.2]	3.9 [1.1]	15.7 [4.6]	14.2 [4.2]	13.0 [3.8]	
	Power	8.9	8.7	8.6	8.7	8.6	8.4	8.8	8.7	8.5	
110 [43.3]	Total kBtu/h [kW]	68.8 [20.2]	66.2 [19.4]	63.9 [18.7]	40.5 [11.9]	39.0 [11.4]	37.6 [11.0]	50.0 [14.7]	48.1 [14.1]	46.4 [13.6]	
	Sens kBtu/h [kW]	14.7 [4.3]	13.3 [3.9]	12.1 [3.6]	8.4 [2.5]	7.6 [2.2]	7.0 [2.0]	19.4 [5.7]	17.6 [5.2]	16.1 [4.7]	
	Power	9.6	9.5	9.3	9.5	9.3	9.2	9.6	9.4	9.3	
120 [48.9]	Total kBtu/h [kW]	78.8 [23.1]	75.8 [22.2]	73.2 [21.5]	50.5 [14.8]	48.6 [14.2]	46.9 [13.7]	60.0 [17.6]	57.7 [16.9]	55.7 [16.3]	
	Sens kBtu/h [kW]	20.9 [6.1]	19.0 [5.6]	17.3 [5.1]	14.7 [4.3]	13.3 [3.9]	12.1 [3.6]	25.6 [7.5]	23.3 [6.8]	21.2 [6.2]	
	Power	10.6	10.4	10.2	10.5	10.3	10.1	10.6	10.4	10.2	

DR —Depression ratio
dbE —Entering air dry bulb
wbE —Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

GROSS SYSTEMS PERFORMANCE DATA (LOW HUMIDIDRY MODE)—RACDYB150

ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①											
wbE			65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]		
CFM [L/s]			3020 [1425]	2515 [1187]	2010 [949]	3020 [1425]	2515 [1187]	2010 [949]	3020 [1425]	2515 [1187]	2010 [949]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60 [15.6]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	43.9 [12.9] 16.0 [4.7] 4.6	42.4 [12.4] 14.7 [4.3] 4.5	40.8 [12.0] 13.3 [3.9] 4.4	42.2 [12.4] 20.3 [5.9] 4.5	40.8 [11.9] 18.5 [5.4] 4.4	39.3 [11.5] 16.8 [4.9] 4.4	33.9 [9.9] 13.2 [3.9] 4.5	32.7 [9.6] 12.0 [3.5] 4.4	31.5 [9.2] 10.9 [3.2] 4.4
	65 [18.3]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	38.7 [11.3] 6.0 [1.8] 4.4	37.3 [10.9] 5.5 [1.6] 4.3	35.9 [10.5] 5.0 [1.5] 4.3	37.0 [10.8] 10.3 [3.0] 4.4	35.7 [10.5] 9.4 [2.8] 4.3	34.4 [10.1] 8.5 [2.5] 4.2	28.7 [8.4] 3.2 [0.9] 4.4	27.7 [8.1] 2.9 [0.8] 4.3	26.6 [7.8] 2.6 [0.8] 4.2
	70 [21.1]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	34.8 [10.2] -1.1 [-0.3] 4.4	33.6 [9.8] -1.0 [-0.3] 4.3	32.4 [9.5] -0.9 [-0.3] 4.2	33.1 [9.7] 3.2 [0.9] 4.3	32.0 [9.4] 2.9 [0.8] 4.2	30.8 [9.0] 2.6 [0.8] 4.1	24.8 [7.3] -3.9 [-1.2] 4.3	24.0 [7.0] -3.6 [-1.1] 4.2	23.1 [6.8] -3.3 [-1.0] 4.2
	75 [23.9]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	32.4 [9.5] -5.3 [-1.5] 4.4	31.3 [9.2] -4.8 [-1.4] 4.3	30.2 [8.8] -4.4 [-1.3] 4.2	30.8 [9.0] -1.0 [-0.3] 4.3	29.7 [8.7] -1.0 [-0.3] 4.2	28.6 [8.4] -0.9 [-0.3] 4.2	22.4 [6.6] -8.2 [-2.4] 4.3	21.6 [6.3] -7.5 [-2.2] 4.3	20.9 [6.1] -6.8 [-2.0] 4.2
	80 [26.7]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	31.5 [9.2] -6.6 [-1.9] 4.5	30.4 [8.9] -6.0 [-1.8] 4.4	29.3 [8.6] -5.5 [-1.6] 4.3	29.8 [8.7] -2.4 [-0.7] 4.4	28.8 [8.4] -2.2 [-0.6] 4.3	27.7 [8.1] -2.0 [-0.6] 4.3	21.5 [6.3] -9.5 [-2.8] 4.4	20.7 [6.1] -8.7 [-2.5] 4.3	20.0 [5.9] -7.9 [-2.3] 4.3
	85 [29.4]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	32.0 [9.4] -5.0 [-1.5] 4.7	30.9 [9.0] -4.6 [-1.3] 4.6	29.7 [8.7] -4.2 [-1.2] 4.5	30.3 [8.9] -0.8 [-0.2] 4.6	29.2 [8.6] -0.7 [-0.2] 4.5	28.2 [8.3] -0.7 [-0.2] 4.4	22.0 [6.4] -7.9 [-2.3] 4.6	21.2 [6.2] -7.2 [-2.1] 4.5	20.4 [6.0] -6.5 [-1.9] 4.4
	90 [32.2]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	33.9 [9.9] -0.6 [-0.2] 4.9	32.7 [9.6] -0.5 [-0.2] 4.8	31.5 [9.2] -0.5 [-0.1] 4.7	32.2 [9.4] 3.7 [1.1] 4.9	31.1 [9.1] 3.4 [1.0] 4.8	29.9 [8.8] 3.0 [0.9] 4.7	23.9 [7.0] -3.4 [-1.0] 4.9	23.1 [6.8] -3.1 [-0.9] 4.8	22.2 [6.5] -2.9 [-0.8] 4.7

GROSS SYSTEMS PERFORMANCE DATA (HIGH HUMIDIDRY MODE)—RACDYB150

ENTERING INDOOR AIR @ 75°F [23.9°C] dbE ①											
wbE			65.3°F [18.5°C]			64°F [17.8°C]			62.5°F [16.9°C]		
CFM [L/s]			6000 [2832]	4300 [2029]	4000 [1888]	6000 [2832]	4300 [2029]	4000 [1888]	6000 [2832]	4300 [2029]	4000 [1888]
OUTDOOR DRY BULB TEMPERATURE °F [°C]	60°F [15.6]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	86.7 [25.4] 22.2 [6.5] 9.4	80.9 [23.7] 18.8 [5.5] 9.1	79.9 [23.4] 18.2 [5.3] 9.1	85.0 [24.9] 30.1 [8.8] 9.2	79.3 [23.2] 25.4 [7.4] 8.9	78.3 [22.9] 24.6 [7.2] 8.8	76.8 [22.5] 39.8 [11.7] 9.3	71.7 [21.0] 33.6 [9.9] 9.0	70.8 [20.7] 32.5 [9.5] 9.0
	70°F [21.1]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	82.0 [24.0] 11.2 [3.3] 9.7	76.5 [22.4] 9.4 [2.8] 9.4	75.6 [22.1] 9.1 [2.7] 9.4	80.3 [23.5] 19.0 [5.6] 9.5	75.0 [22.0] 16.1 [4.7] 9.2	74.0 [21.7] 15.6 [4.6] 9.1	72.2 [21.1] 28.8 [8.4] 9.7	67.3 [19.7] 24.3 [7.1] 9.3	66.5 [19.5] 23.5 [6.9] 9.3
	80°F [26.7]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	77.2 [22.6] 2.1 [0.6] 10.3	72.1 [21.1] 1.7 [0.5] 9.9	71.1 [20.8] 1.7 [0.5] 9.8	75.5 [22.1] 9.9 [2.9] 10	70.5 [20.7] 8.4 [2.5] 9.7	69.6 [20.4] 8.1 [2.4] 9.6	67.4 [19.7] 19.7 [5.8] 10.2	62.8 [18.4] 16.6 [4.9] 9.8	62.1 [18.2] 16.1 [4.7] 9.8
	90°F [32.2]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	72.3 [21.2] -5.1 [-1.5] 11.0	67.4 [19.8] -4.3 [-1.3] 10.6	66.6 [19.5] -4.2 [-1.2] 10.5	70.6 [20.7] 2.8 [0.8] 10.7	65.9 [19.3] 2.4 [0.7] 10.4	65 [19.1] 2.3 [0.7] 10.3	62.4 [18.3] 12.5 [3.7] 10.9	58.2 [17.1] 10.6 [3.1] 10.5	57.5 [16.8] 10.2 [3.0] 10.4
	100°F [37.8]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	67.2 [19.7] -10.3 [-3.0] 11.9	62.7 [18.4] -8.7 [-2.5] 11.5	61.9 [18.1] -8.4 [-2.5] 11.4	65.5 [19.2] -2.4 [-0.7] 11.7	61.1 [17.9] -2.0 [-0.6] 11.3	60.3 [17.7] -1.9 [-0.6] 11.2	57.3 [16.8] 7.3 [2.2] 11.8	53.5 [15.7] 6.2 [1.8] 11.4	52.8 [15.5] 6.0 [1.8] 11.3
	110 [43.3]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	62.0 [18.2] -13.5 [-4.0] 13.0	57.8 [16.9] -11.4 [-3.3] 12.6	57.1 [16.7] -11.0 [-3.2] 12.5	60.3 [17.7] -5.6 [-1.6] 12.8	56.2 [16.5] -4.7 [-1.4] 12.3	55.5 [16.3] -4.6 [-1.3] 12.3	52.1 [15.3] 4.1 [1.2] 12.9	48.6 [14.2] 3.5 [1.0] 12.5	48.0 [14.1] 3.4 [1.0] 12.4
	120 [48.9]	Total kBTu/h [kW] Sens kBTu/h [kW] Power	56.6 [16.6] -14.7 [-4.3] 14.3	52.8 [15.5] -12.4 [-3.6] 13.8	52.1 [15.3] -12.0 [-3.5] 13.8	54.9 [16.1] -6.9 [-2.0] 14.1	51.2 [15.0] -5.8 [-1.7] 13.6	50.6 [14.8] -5.6 [-1.6] 13.5	46.7 [13.7] 2.9 [0.8] 14.2	43.6 [12.8] 2.4 [0.7] 13.8	43.0 [12.6] 2.3 [0.7] 13.7

DR —Depression ratio
dbE—Entering air dry bulb
wbE—Entering air wet bulb

Total —Total capacity x 1000 Btu/h
Sens —Sensible capacity x 1000 Btu/h
Power —kW input

NOTES: ① When the entering air dry bulb is other than 75°F [23.9°C], adjust the sensible capacity from the table by adding $[1.10 \times \text{CFM} \times (1 - \text{DR}) \times (\text{dbE} - 80)]$.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 7.5 TON [26.4 kW] — 60 Hz — DOWNFLOW

Air Flow CFM [L/s]	Model RACDYB090 Voltage 208/230, 460, 575 — 3 phase 60 Hz																							
	External Static Pressure—Inches of Water [kPa]																							
	0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	1.1 [0.27]	1.2 [0.30]	1.3 [0.32]	1.4 [0.35]	1.5 [0.37]	1.6 [0.40]	1.7 [0.42]	1.8 [0.45]	1.9 [0.47]	2.0 [0.50]				
	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W
2400 [1133]	—	—	—	567	800	803	833	638	870	672	911	706	955	739	1003	772	1055	803	1111	835	1170	865	1233	895
2500 [1180]	—	—	—	575	827	610	862	645	900	678	942	712	987	744	1036	776	1089	808	1146	838	1207	869	1271	898
2600 [1227]	—	—	—	548	825	583	857	618	892	652	932	685	975	718	1022	750	1072	812	1185	843	1246	872	1312	901
2700 [1274]	—	—	—	557	856	591	889	626	926	659	966	692	1011	724	1059	756	1111	787	1166	817	1226	847	1289	876
2800 [1321]	—	—	—	566	890	600	924	634	962	667	1004	699	1049	731	1099	762	1152	793	1209	822	1269	852	1333	880
2900 [1368]	—	—	—	576	926	609	962	642	1001	675	1044	707	1091	738	1141	769	1196	799	1254	828	1315	857	1381	885
3000 [1416]	—	—	—	552	932	586	965	619	1002	651	1042	683	1087	715	1135	745	1187	776	1242	805	1301	834	1364	862
3100 [1463]	—	—	562	972	596	1007	629	1045	661	1087	692	1132	723	1181	753	1234	783	1291	812	1352	840	1416	868	1484
3200 [1510]	—	—	574	1015	606	1051	639	1090	670	1133	701	1180	732	1231	761	1285	791	1343	819	1405	847	1470	874	1540
3300 [1557]	552	1028	585	1061	617	1098	649	1139	680	1183	711	1231	741	1283	770	1338	799	1398	827	1461	854	1527	881	1598
3400 [1604]	564	1075	597	1110	629	1148	660	1190	691	1235	721	1284	750	1337	779	1394	807	1455	834	1519	861	1587	888	1659
3500 [1652]	577	1125	609	1161	640	1200	671	1243	701	1290	731	1340	760	1395	788	1453	815	1514	843	1580	869	1649	895	1722
3600 [1699]	590	1178	621	1215	652	1255	683	1299	712	1347	741	1399	770	1455	797	1514	824	1577	851	1644	877	1714	902	1788

NOTE: F-Drive left of the bold line, G-Drive right of the bold line, H-Drive right of second bold line.

Drive Package	F												G												H											
Motor H.P. [W]	2 [1491.4]												3 [2237.1]												3 [2237.1]											
Blower Sheave	AK84H												AK84H												AK84H											
Motor Sheave	1VP40												1VP50												1VP56											
Belt	A49												A50												A51											
Turns Open	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5												
RPM	766	722	677	634	591	544	990	948	906	864	822	779	1109	1069	1029	988	948	906	1109	1069	1029	988	948	906												

- NOTES: 1. Do not set motor sheave below minimum or maximum turns open shown.
2. Re-adjustment of sheave required to achieve rated airflow at AHRI minimum External Static Pressure
3. Drive data shown is for horizontal airflow with dry coil. Add component resistance (below) to duct resistance to determine total External Static Pressure.
4. Factory sheave settings are shown in bold type

[] Designates Metric Conversions

AIRFLOW PERFORMANCE — 7.5 TON [26.4 kW] — 60 Hz — DOWNFLOW (CONTINUED)

Airflow	AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE						
	CFM [L/s]	Total kBTu/h	Sensible kBTu/h	Power kW	Wet Coil	Vertical Economizer RA Damper Open	Concentric Diffuser RXRN-AEF2000 & Concentric Adapter RXMC-DD01 (Flush)	Concentric Diffuser RXRN-AED2000 & Concentric Adapter RXMC-DD01 (Drop)	Pressure Drop MERV 8	Pressure Drop MERV 13
							Resistance — Inches of Water [kPa]			
2400 [1133]	0.96	0.89	0.98	0.04 [.01]	0.01 [.00]		0.66 [.16]	0.53 [.13]	0.093 [.02]	0.047 [.01]
2500 [1180]	0.96	0.90	0.99	0.05 [.01]	0.02 [.00]		0.71 [.18]	0.57 [.14]	0.098 [.02]	0.055 [.01]
2600 [1227]	0.97	0.92	0.99	0.05 [.01]	0.02 [.01]		0.75 [.19]	0.60 [.15]	0.103 [.02]	0.062 [.01]
2700 [1274]	0.97	0.93	0.99	0.05 [.01]	0.03 [.01]		0.80 [.20]	0.65 [.16]	0.108 [.03]	0.070 [.02]
2800 [1321]	0.98	0.95	0.99	0.06 [.01]	0.04 [.01]		0.85 [.21]	0.69 [.17]	0.113 [.03]	0.078 [.02]
2900 [1368]	0.98	0.96	1.00	0.06 [.02]	0.04 [.01]		0.91 [.23]	0.74 [.18]	0.117 [.03]	0.085 [.02]
3000 [1416]	0.99	0.97	1.00	0.07 [.02]	0.05 [.01]		0.96 [.24]	0.79 [.20]	0.122 [.03]	0.093 [.02]
3100 [1463]	1.00	0.99	1.00	0.07 [.02]	0.06 [.02]		1.02 [.25]	0.86 [.21]	0.127 [.03]	0.100 [.02]
3200 [1510]	1.00	1.00	1.01	0.07 [.02]	0.07 [.02]		1.08 [.27]	0.92 [.23]	0.132 [.03]	0.108 [.03]
3300 [1557]	1.01	1.02	1.01	0.08 [.02]	0.08 [.02]		1.15 [.29]	0.99 [.25]	0.137 [.03]	0.115 [.03]
3400 [1604]	1.01	1.03	1.01	0.08 [.02]	0.09 [.02]		1.21 [.30]	1.05 [.26]	0.142 [.03]	0.123 [.03]
3500 [1652]	1.02	1.05	1.01	0.09 [.02]	0.10 [.02]		1.29 [.32]	1.09 [.27]	0.147 [.04]	0.131 [.03]
3600 [1699]	1.02	1.06	1.02	0.09 [.02]	0.11 [.03]		1.36 [.34]	1.13 [.28]	0.152 [.04]	0.138 [.03]

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 7.5 TON [26.4 kW] — 60 Hz — SIDEFLOW

Air Flow CFM [L/s]	Model RACDYB090 Voltage 208/230, 460, 575 — 3 phase 60 Hz																																							
	External Static Pressure—Inches of Water [kPa]																																							
	0.1 [0.02] RPM W	0.2 [0.05] RPM W	0.3 [0.07] RPM W	0.4 [0.10] RPM W	0.5 [0.12] RPM W	0.6 [0.15] RPM W	0.7 [0.17] RPM W	0.8 [0.20] RPM W	0.9 [0.22] RPM W	1.0 [0.25] RPM W	1.1 [0.27] RPM W	1.2 [0.30] RPM W	1.3 [0.32] RPM W	1.4 [0.35] RPM W	1.5 [0.37] RPM W	1.6 [0.40] RPM W	1.7 [0.42] RPM W	1.8 [0.45] RPM W	1.9 [0.47] RPM W	2.0 [0.50] RPM W																				
2400 [1133]	—	—	—	558	804	594	845	630	890	665	936	700	985	734	1035	767	1089	799	1144	831	1202	861	1262	892	921	1389	950	1456	978	1526	1005	1597	1032	1671	1057	1747				
2500 [1180]	—	—	—	565	834	601	877	637	922	671	970	705	1019	739	1071	771	1126	803	1182	834	1241	864	1302	894	1366	923	1432	951	1500	978	1570	1005	1643	1031	1718	1057	1795			
2600 [1227]	—	—	—	573	867	609	911	644	957	678	1006	711	1056	744	1109	776	1165	807	1222	838	1282	867	1345	896	1409	925	1476	953	1545	979	1617	1006	1690	1031	1766	1056	1845			
2700 [1274]	—	—	—	584	895	581	902	616	947	651	994	684	1044	717	1095	749	1149	781	1206	812	1265	842	1326	871	1389	899	1455	927	1522	954	1593	981	1665	1007	1740	1032	1817	1056	1896	
2800 [1321]	—	—	—	595	925	590	939	624	985	658	1033	691	1084	724	1136	755	1192	786	1249	816	1309	846	1371	875	1435	903	1502	930	1571	957	1642	983	1716	1008	1792	1032	1870	1056	1950	
2900 [1368]	—	—	—	604	958	598	978	633	1025	666	1074	699	1126	730	1180	762	1236	792	1294	822	1355	851	1418	879	1484	906	1552	933	1622	959	1694	985	1769	1009	1845	1033	1925	1056	2006	
3000 [1416]	—	—	—	614	1067	611	1111	674	1117	676	1170	738	1225	745	1272	775	1331	798	1342	827	1404	856	1468	883	1534	910	1603	937	1672	965	1748	987	1820	1011	1901	1035	1982	1057	2064	
3100 [1463]	—	550	970	584	1015	618	1062	651	1111	683	1163	714	1216	745	1272	775	1331	804	1391	833	1454	861	1520	888	1587	915	1637	947	1729	962	1804	987	1880	1011	1959	1036	2041	1058	2124	
3200 [1510]	—	561	1013	594	1059	628	1107	660	1157	692	1210	723	1265	753	1322	782	1381	811	1443	839	1507	867	1573	893	1642	919	1713	945	1786	989	1862	993	1939	1016	2020	1038	2102	1060	2187	
3300 [1557]	—	572	1059	605	1105	638	1154	670	1206	701	1259	731	1315	761	1373	790	1434	818	1497	846	1562	873	1629	899	1699	924	1771	949	1845	973	1922	996	2001	1019	2082	1041	2165	1082	2251	
3400 [1604]	550	1060	584	1106	616	1154	648	1204	680	1256	710	1311	740	1368	770	1427	798	1489	826	1552	853	1619	879	1687	905	1758	930	1831	954	1906	977	1984	2004	1022	2146	1043	2231	1064	2317	
3500 [1652]	563	1109	596	1155	628	1204	659	1255	690	1309	720	1364	750	1423	778	1483	806	1545	834	1610	860	1678	886	1747	911	1819	935	1895	969	982	2048	1004	2129	1026	2212	1046	2298	1066	2386	
3600 [1699]	575	1159	608	1207	640	1257	671	1309	701	1363	731	1420	759	1479	788	1541	815	1604	842	1670	868	1739	893	1809	918	1882	941	1957	965	2035	987	2114	209	2196	1030	2281	1050	2367	1089	2456

NOTE: F-Drive left of the bold line, G-Drive right of the bold line, H-Drive right of second bold line.

Drive Package	F						G						H					
Motor H.P. [W]	2 [1491.4]						3 [2237.1]						3 [2237.1]					
Blower Sheave	AK84H						AK84H						AK84H					
Motor Sheave	1VP40						1VP50						1VP56					
Belt	A49						A50						A51					
Turns Open	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5
RPM	766	720	676	632	587	545	989	947	904	863	821	778	1075	1067	1031	989	947	906

NOTES: 1. Do not set motor sheave below minimum or maximum turns open shown.

2. Re-adjustment of sheave required to achieve rated airflow at AHRI minimum External Static Pressure

3. Drive data shown is for horizontal airflow with dry coil. Add component resistance (below) to duct resistance to determine total External Static Pressure.

4. Factory sheave settings are shown in bold type.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE — 7.5 TON [26.4 kW] — 60 Hz — SIDEFLOW (CONTINUED)

Airflow	AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE						
	CFM [L/s]	Total kbtu/h	Sensible kbtu/h	Power kW	Wet Coil	Horizontal Economizer RA Damper Open	Concentric Diffuser RXRN-AEF2000 & Concentric Adapter RXMC-DD01 (Flush)	Concentric Diffuser RXRN-AED2000 & Concentric Adapter RXMC-DD01 (Drop)	Pressure Drop MERV 8	Pressure Drop MERV 13
							Resistance — Inches of Water [kPa]			
2400 [1133]	0.96	0.89	0.98		0.04 [.01]	0.21 [.05]	0.66 [.16]	0.53 [.13]	0.093 [.02]	0.047 [.01]
2500 [1180]	0.96	0.90	0.99		0.05 [.01]	0.25 [.06]	0.71 [.18]	0.57 [.14]	0.098 [.02]	0.055 [.01]
2600 [1227]	0.97	0.92	0.99		0.05 [.01]	0.28 [.07]	0.75 [.19]	0.60 [.15]	0.103 [.02]	0.062 [.01]
2700 [1274]	0.97	0.93	0.99		0.05 [.01]	0.32 [.08]	0.80 [.20]	0.65 [.16]	0.108 [.03]	0.070 [.02]
2800 [1321]	0.98	0.95	0.99		0.06 [.01]	0.36 [.09]	0.85 [.21]	0.69 [.17]	0.113 [.03]	0.078 [.02]
2900 [1368]	0.98	0.96	1.00		0.06 [.02]	0.39 [.10]	0.91 [.23]	0.74 [.18]	0.117 [.03]	0.085 [.02]
3000 [1416]	0.99	0.97	1.00		0.07 [.02]	0.43 [.11]	0.96 [.24]	0.79 [.20]	0.122 [.03]	0.093 [.02]
3100 [1463]	1.00	0.99	1.00		0.07 [.02]	0.47 [.12]	1.02 [.25]	0.86 [.21]	0.127 [.03]	0.100 [.02]
3200 [1510]	1.00	1.00	1.01		0.07 [.02]	0.51 [.13]	1.08 [.27]	0.92 [.23]	0.132 [.03]	0.108 [.03]
3300 [1557]	1.01	1.02	1.01		0.08 [.02]	0.54 [.14]	1.15 [.29]	0.99 [.25]	0.137 [.03]	0.115 [.03]
3400 [1604]	1.01	1.03	1.01		0.08 [.02]	0.58 [.14]	1.21 [.30]	1.05 [.26]	0.142 [.03]	0.123 [.03]
3500 [1652]	1.02	1.05	1.01		0.09 [.02]	0.62 [.15]	1.29 [.32]	1.09 [.27]	0.147 [.04]	0.131 [.03]
3600 [1699]	1.02	1.06	1.02		0.09 [.02]	0.66 [.16]	1.36 [.34]	1.13 [.28]	0.152 [.04]	0.138 [.03]

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 8.5 TON [29.9 kW] — 60 Hz — DOWNFLOW

Air Flow CFM [L/s]	Model RACDYB102 Voltage 208/230, 460, 575 — 3 phase 60 Hz																																					
	External Static Pressure—Inches of Water [kPa]																																					
	0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	1.1 [0.27]	1.2 [0.30]	1.3 [0.32]	1.4 [0.35]	1.5 [0.37]	1.6 [0.40]	1.7 [0.42]	1.8 [0.45]	1.9 [0.47]	2.0 [0.50]																		
RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W																	
2700 [127.4]	—	—	—	—	612	955	646	998	680	1044	713	1092	745	1143	777	1196	809	1251	840	1309	871	1369	901	1432	930	1496	960	1564	988	1633	1016	1705	1044	1780	1071	1856		
2800 [132.1]	—	—	—	—	622	986	655	1031	688	1078	721	1128	753	1180	784	1234	815	1291	845	1350	875	1411	905	1475	934	1541	962	1610	990	1681	1018	1754	1045	1830	1071	1908		
2900 [136.8]	—	—	—	—	599	977	632	1021	665	1067	697	1116	729	1167	760	1220	791	1276	821	1334	851	1394	880	1457	909	1522	937	1590	965	1660	992	1732	1019	1806	1045	1883	1071	1963
3000 [141.6]	—	—	—	—	610	1014	642	1060	674	1107	706	1157	737	1209	767	1264	798	1321	827	1380	856	1442	885	1506	913	1573	941	1641	988	1713	994	1786	1021	1862	1046	1940	1071	2021
3100 [146.3]	—	—	—	—	588	1011	620	1055	651	1101	684	1150	715	1201	745	1255	775	1311	804	1369	833	1430	862	1493	890	1558	917	1626	944	1696	971	1769	997	1844	1022	1921	1047	2070
3200 [151.0]	—	—	—	—	600	1053	631	1098	663	1146	693	1196	724	1249	753	1304	783	1361	811	1421	840	1483	867	1547	895	1614	922	1683	948	1755	974	1829	999	1905	1024	1983	1048	2064
3300 [155.7]	—	—	—	—	580	1054	611	1099	642	1145	673	1195	703	1246	733	1300	762	1356	790	1415	818	1476	846	1539	873	1605	900	1673	926	1744	952	1816	977	1892	1001	1969	1026	2049
3400 [160.4]	—	—	—	—	592	1102	623	1148	653	1196	683	1246	713	1299	742	1354	770	1412	798	1472	825	1534	852	1599	879	1666	909	1730	930	1807	955	1882	980	1958	1004	2037	1027	2118
3500 [165.2]	—	—	—	—	605	1153	635	1200	665	1250	694	1301	723	1356	751	1412	779	1471	806	1532	833	1596	859	1662	885	1798	910	1981	935	1845	959	1950	983	2028	1006	2108	1029	2191
3600 [169.9]	587	1161	617	1208	647	1256	676	1307	704	1360	732	1415	760	1473	787	1534	814	1596	840	1661	866	1729	891	1798	915	1870	939	1845	963	2022	986	2101	1009	2183	1031	2266	1053	2363
3700 [174.6]	600	1218	630	1265	659	1315	687	1367	715	1422	742	1478	769	1538	796	1599	822	1663	847	1730	872	1798	897	1869	921	1943	944	2019	967	2097	990	2177	1012	2260	1033	2346	1054	2433
3800 [179.3]	614	1278	642	1326	671	1378	698	1431	726	1487	752	1545	779	1606	805	1668	830	1734	855	1801	879	1871	903	1944	926	2019	949	2096	971	2175	993	2257	1014	2341	1035	2428	1056	2517
3900 [184.0]	627	1341	655	1391	683	1443	710	1498	736	1555	763	1615	788	1677	813	1741	838	1808	862	1877	886	1948	909	2022	931	2098	954	2176	975	2257	996	2340	1017	2426	1037	2514	1057	2608
4000 [188.8]	641	1407	668	1459	695	1512	721	1569	747	1627	773	1688	798	1751	822	1817	846	1885	870	1955	893	2028	915	2103	937	2180	950	2260	980	2342	1000	2427	1020	2514	1040	2603	1059	2694
4100 [193.5]	654	1477	681	1530	707	1585	733	1642	758	1702	783	1764	807	1829	831	1896	854	1965	877	2037	899	2111	921	2187	943	2266	963	2347	984	2431	1004	2517	1023	2605	1042	2696	1060	2789

NOTE: F-Drive left of the bold line, G-Drive right of the bold line, H-Drive right of second bold line.

Drive Package	F						G						H					
Motor H.P. [W]	2 [1491.4]						3 [2237.1]						3 [2237.1]					
Blower Sheave	AK79H						AK79H						AK79H					
Motor Sheave	1VP40						1VP50						1VP56					
Belt	A49						A50						A51					
Turns Open	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5
RPM	816	772	726	678	632	580	1046	1003	959	917	872	826	1153	1114	1082	1040	998	956

- NOTES: 1. Do not set motor sheave below minimum or maximum turns open shown.
2. Re-adjustment of sheave required to achieve rated airflow at AHRI minimum External Static Pressure
3. Drive data shown is for horizontal airflow with dry coil. Add component resistance (below) to duct resistance to determine total External Static Pressure.
4. Factory sheave settings are shown in bold type.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE—8.5 TON [29.9 kW] — 60 Hz — DOWNFLOW (CONTINUED)

Airflow	AIRFLOW CORRECTION FACTORS *				COMPONENT AIRFLOW RESISTANCE					
	CFM [L/s]	Total kBTu/h	Sensible kBTu/h	Power kW	Wet Coil	Vertical Economizer RA Damper Open	Concentric Diffuser RXRN-AEF2000 & Concentric Adapter RXMC-DD01 (Flush)	Concentric Diffuser RXRN-AED2000 & Concentric Adapter RXMC-DD01 (Drop)	Pressure Drop MERV 8	Pressure Drop MERV 13
Resistance — Inches of Water [kPa]										
2700 [1274]	0.97	0.93	0.99	0.99	0.07 [.02]	0.03 [.01]	0.80 [.20]	0.65 [.16]	0.108 [.03]	0.070 [.02]
2800 [1321]	0.98	0.94	0.99	0.99	0.07 [.02]	0.03 [.01]	0.85 [.21]	0.69 [.17]	0.113 [.03]	0.078 [.02]
2900 [1368]	0.98	0.96	0.99	0.99	0.08 [.02]	0.04 [.01]	0.91 [.23]	0.74 [.18]	0.117 [.03]	0.085 [.02]
3000 [1416]	0.99	0.97	1.00	1.00	0.08 [.02]	0.05 [.01]	0.96 [.24]	0.79 [.20]	0.122 [.03]	0.093 [.02]
3100 [1463]	0.99	0.99	1.00	1.00	0.09 [.02]	0.06 [.01]	1.02 [.25]	0.86 [.21]	0.127 [.03]	0.100 [.02]
3200 [1510]	1.00	1.00	1.00	1.00	0.10 [.02]	0.07 [.02]	1.08 [.27]	0.92 [.23]	0.132 [.03]	0.108 [.03]
3300 [1557]	1.01	1.01	1.00	1.00	0.10 [.03]	0.08 [.02]	1.15 [.29]	0.99 [.25]	0.137 [.03]	0.115 [.03]
3400 [1604]	1.01	1.03	1.03	1.01	0.11 [.03]	0.09 [.02]	1.21 [.30]	1.05 [.26]	0.142 [.03]	0.123 [.03]
3500 [1652]	1.02	1.04	1.04	1.01	0.11 [.03]	0.10 [.02]	1.29 [.32]	1.09 [.27]	0.147 [.04]	0.131 [.03]
3600 [1699]	1.02	1.06	1.06	1.01	0.12 [.03]	0.11 [.03]	1.36 [.34]	1.13 [.28]	0.152 [.04]	0.138 [.03]
3700 [1746]	1.03	1.07	1.07	1.02	0.13 [.03]	0.12 [.03]	1.43 [.36]	1.18 [.29]	0.157 [.04]	0.146 [.04]
3800 [1793]	1.03	1.09	1.09	1.02	0.13 [.03]	0.13 [.03]	1.50 [.37]	1.23 [.31]	0.162 [.04]	0.153 [.04]
3900 [1840]	1.04	1.10	1.10	1.02	0.14 [.04]	0.15 [.04]	1.59 [.40]	1.31 [.33]	0.167 [.04]	0.161 [.04]
4000 [1888]	1.05	1.12	1.12	1.02	0.14 [.04]	0.16 [.04]	1.68 [.42]	1.38 [.34]	0.171 [.04]	0.169 [.04]
4100 [1935]	1.05	1.13	1.13	1.03	0.15 [.04]	0.17 [.04]	1.74 [.43]	1.44 [.36]	0.176 [.04]	0.176 [.04]

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 8.5 TON [29.9 kW] — 60 Hz — SIDEFLOW

Air Flow CFM [L/s]	Model RACDYB102 Voltage 208/230, 460, 575 — 3 phase 60 Hz																																							
	External Static Pressure—Inches of Water [kPa]																																							
	0.1 [0.02] RPM	0.2 [0.05] W	0.3 [0.07] RPM	0.4 [0.10] W	0.5 [0.12] RPM	0.6 [0.15] W	0.7 [0.17] RPM	0.8 [0.20] W	0.9 [0.22] RPM	1.0 [0.25] W	1.1 [0.27] RPM	1.2 [0.30] W	1.3 [0.32] RPM	1.4 [0.35] W	1.5 [0.37] RPM	1.6 [0.40] W	1.7 [0.42] RPM	1.8 [0.45] W	1.9 [0.47] RPM	2.0 [0.50] W																				
2700 [1274]	—	—	—	—	612	975	645	1010	677	1046	708	1085	739	1127	770	1171	800	1217	829	1266	858	1317	886	1370	914	1426	941	1484	968	1544	995	1607	1020	1672	1046	1740				
2800 [1321]	—	—	—	587	965	620	999	652	1035	683	1074	715	1116	745	1159	775	1205	805	1254	834	1304	862	1358	890	1413	918	1471	945	1531	971	1594	997	1659	1022	1727	1047	1796			
2900 [1368]	—	—	—	595	989	627	1026	659	1064	690	1105	721	1149	751	1195	781	1243	810	1294	839	1347	867	1402	894	1460	921	1520	948	1582	974	1647	1000	1714	1025	1784	1049	1856			
3000 [1416]	—	—	—	603	1017	635	1056	667	1097	697	1140	728	1186	758	1234	787	1284	816	1337	844	1392	871	1450	899	1510	925	1572	962	1637	977	1704	1002	1773	1027	1845	1051	1919			
3100 [1463]	—	—	—	612	1049	643	1090	674	1133	705	1178	735	1226	764	1276	793	1329	821	1384	849	1441	876	1501	903	1563	903	1628	955	1694	981	1764	1005	1835	1030	1909	1053	1965			
3200 [1510]	—	—	589	1043	621	1084	652	1127	682	1172	712	1220	742	1270	771	1322	799	1377	827	1434	855	1494	882	1556	908	1620	934	1686	959	1755	984	1827	1009	1901	1032	1977	1056	2055		
3300 [1557]	—	—	598	1079	630	1122	660	1167	690	1215	720	1265	749	1317	778	1371	806	1428	833	1488	861	1549	887	1613	913	1680	939	1749	964	1820	988	1894	1012	1970	1036	2048	1058	2129		
3400 [1604]	—	—	608	1119	639	1164	669	1211	699	1261	728	1313	757	1367	785	1424	813	1483	840	1545	867	1609	893	1675	918	1743	943	1815	968	1888	992	1964	1016	2042	1039	2122	1061	2205		
3500 [1652]	—	587	1117	618	1162	648	1209	678	1258	707	1310	736	1364	765	1421	792	1480	820	1541	847	1605	873	1671	899	1740	924	1810	949	1884	974	1959	996	2037	1020	2117	1042	2200	1064	2285	
3600 [1699]	—	597	1161	628	1208	658	1257	687	1309	716	1363	745	1419	773	1478	800	1539	827	1603	853	1669	879	1737	905	1808	929	1881	954	1956	978	2034	1014	2024	2197	1046	2281	1068	2369		
3700 [1746]	—	608	1209	638	1258	668	1309	697	1363	725	1419	753	1478	781	1539	808	1602	834	1668	860	1736	886	1806	911	1879	935	1954	959	2032	983	2112	1006	2194	1028	2279	1050	2366	1071	2455	
3800 [1793]	588	1211	619	1260	648	1311	678	1365	706	1421	734	1479	762	1540	789	1603	816	1668	842	1736	868	1807	893	1879	917	1954	941	2032	965	2111	198	2193	1011	2278	1033	2365	1054	2454	1075	2546
3900 [1840]	600	1263	630	1314	659	1367	688	1423	716	1481	744	1542	771	1605	798	1670	824	1738	850	1808	875	1881	900	1955	924	2033	948	2112	971	2194	94	2278	1016	2365	1037	2454	1058	2546	1079	2639
4000 [1888]	611	1318	641	1372	670	1427	698	1485	726	1546	754	1608	781	1674	807	1741	833	1811	858	1883	883	1958	907	2035	931	2114	954	2196	977	2280	999	2367	1021	2455	1042	2547	1063	2736		
4100 [1935]	623	1377	652	1433	681	1491	709	1551	737	1613	764	1678	790	1746	816	1815	841	1887	866	1962	891	2039	915	2118	938	2199	961	2283	983	2370	1005	2458	1027	2549	1047	2643	1068	2739	1088	2837

NOTE: F-Drive left of the bold line, G-Drive right of the bold line, H-Drive right of second bold line.

Drive Package	F					G					H							
Motor H.P. [W]	2 [1491.4]					3 [2237.1]					3 [2237.1]							
Blower Sheave	AK79H					AK79H					AK79H							
Motor Sheave	1VP40					1VP50					1VP56							
Belt	A49					A50					A51							
Turns Open	0	1	2	3	4	5	0	1	2	3	4	5	0	1	2	3	4	5
RPM	822	775	726	684	631	587	1046	1002	959	915	872	827	1149	1118	1083	1041	1000	956

- NOTES: 1. Do not set motor sheave below minimum or maximum turns open shown.
2. Re-adjustment of sheave required to achieve rated airflow at AHRI minimum External Static Pressure
3. Drive data shown is for horizontal airflow with dry coil. Add component resistance (below) to duct resistance to determine total External Static Pressure.
4. Factory sheave settings are shown in bold type.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE—8.5 TON [29.9 kW] — 60 Hz — SIDEFLOW (CONTINUED)

Airflow	AIRFLOW CORRECTION FACTORS *				COMPONENT AIRFLOW RESISTANCE						
	CFM [L/s]	Total kbtu/h	Sensible kbtu/h	Power kW	Wet Coil	Horizontal Economizer RA Damper Open	Concentric Diffuser RXRN-AEF2000 & Concentric Adapter RXMC-DD01 (Flush)	Concentric Diffuser RXRN-AED2000 & Concentric Adapter RXMC-DD01 (Drop)	Pressure Drop MERV 8	Pressure Drop MERV 13	
											Resistance — Inches of Water [kPa]
2700 [1274]	0.97	0.93	0.99	0.99	0.07 [.02]	0.32 [.08]	0.80 [.20]	0.65 [.16]	0.108 [.03]	0.070 [.02]	
2800 [1321]	0.98	0.94	0.99	0.99	0.07 [.02]	0.36 [.09]	0.85 [.21]	0.69 [.17]	0.113 [.03]	0.078 [.02]	
2900 [1368]	0.98	0.96	0.99	0.99	0.08 [.02]	0.39 [.10]	0.91 [.23]	0.74 [.18]	0.117 [.03]	0.085 [.02]	
3000 [1416]	0.99	0.97	1.00	1.00	0.08 [.02]	0.43 [.11]	0.96 [.24]	0.79 [.20]	0.122 [.03]	0.093 [.02]	
3100 [1463]	0.99	0.99	1.00	1.00	0.09 [.02]	0.47 [.12]	1.02 [.25]	0.86 [.21]	0.127 [.03]	0.100 [.02]	
3200 [1510]	1.00	1.00	1.00	1.00	0.10 [.02]	0.51 [.13]	1.08 [.27]	0.92 [.23]	0.132 [.03]	0.108 [.03]	
3300 [1557]	1.01	1.01	1.00	1.00	0.10 [.03]	0.54 [.14]	1.15 [.29]	0.99 [.25]	0.137 [.03]	0.115 [.03]	
3400 [1604]	1.01	1.03	1.01	1.01	0.11 [.03]	0.58 [.14]	1.21 [.30]	1.05 [.26]	0.142 [.03]	0.123 [.03]	
3500 [1652]	1.02	1.04	1.01	1.01	0.11 [.03]	0.62 [.15]	1.29 [.32]	1.09 [.27]	0.147 [.04]	0.131 [.03]	
3600 [1699]	1.02	1.06	1.01	1.01	0.12 [.03]	0.66 [.16]	1.36 [.34]	1.13 [.28]	0.152 [.04]	0.138 [.03]	
3700 [1746]	1.03	1.07	1.02	1.02	0.13 [.03]	0.70 [.17]	1.43 [.36]	1.18 [.29]	0.157 [.04]	0.146 [.04]	
3800 [1793]	1.03	1.09	1.02	1.02	0.13 [.03]	0.74 [.18]	1.50 [.37]	1.23 [.31]	0.162 [.04]	0.153 [.04]	
3900 [1840]	1.04	1.10	1.02	1.02	0.14 [.04]	0.77 [.19]	1.59 [.40]	1.31 [.33]	0.167 [.04]	0.161 [.04]	
4000 [1888]	1.05	1.12	1.02	1.02	0.15 [.04]	0.81 [.20]	1.68 [.42]	1.38 [.34]	0.171 [.04]	0.169 [.04]	
4100 [1935]	1.05	1.13	1.03	1.03	0.15 [.04]	0.85 [.21]	1.74 [.43]	1.44 [.36]	0.176 [.04]	0.176 [.04]	

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 10 TON [35.1 kW] — 60 Hz — DOWNFLOW

Air Flow CFM [L/s]	Model RACDYB120 Voltage 208/230, 460, 575 — 3 phase 60 Hz																																							
	External Static Pressure—Inches of Water [kPa]																																							
	0.1 [0.02]	0.2 [0.05]	0.3 [0.07]	0.4 [0.10]	0.5 [0.12]	0.6 [0.15]	0.7 [0.17]	0.8 [0.20]	0.9 [0.22]	1.0 [0.25]	1.1 [0.27]	1.2 [0.30]	1.3 [0.32]	1.4 [0.35]	1.5 [0.37]	1.6 [0.40]	1.7 [0.42]	1.8 [0.45]	1.9 [0.47]	2.0 [0.50]																				
RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W	RPM	W																			
3200 [1510]	561	781	589	838	615	897	642	959	669	1023	695	1090	722	1159	748	1230	774	1304	800	1380	825	1459	851	1540	876	1623	902	1709	927	1797	952	1888	977	1981	1001	2077	1026	2175	1050	2275
3300 [1557]	572	836	599	895	625	956	651	1020	678	1086	704	1154	730	1225	755	1298	781	1374	807	1452	832	1533	857	1616	882	1701	907	1789	932	1879	956	1972	981	2067	1005	2164	1029	2264	1053	2366
3400 [1604]	582	894	609	955	635	1018	661	1083	687	1151	712	1222	738	1295	763	1370	788	1448	814	1528	838	1610	863	1695	888	1782	912	1872	937	1964	961	2059	985	2155	1009	2255	1032	2357	1056	2461
3500 [1652]	593	955	619	1018	645	1083	670	1151	696	1221	721	1293	746	1368	771	1445	796	1524	821	1606	845	1691	870	1778	894	1867	918	1958	942	2052	966	2149	989	2248	1013	2349	1036	2453	1059	2559
3600 [1699]	604	1020	630	1085	655	1152	680	1221	705	1293	730	1367	755	1444	779	1523	804	1605	828	1688	852	1775	876	1863	900	1955	924	2048	947	2144	971	2242	994	2343	1017	2446	1040	2552	1063	2660
3700 [1746]	615	1088	640	1155	665	1224	690	1295	715	1369	739	1445	764	1524	788	1605	812	1688	836	1774	860	1862	883	1953	907	2046	930	2141	953	2239	976	2339	999	2442	1022	2547	1044	2655	1067	2765
3800 [1793]	627	1160	651	1228	676	1299	700	1372	725	1448	749	1526	773	1607	797	1690	820	1775	844	1863	867	1953	890	2045	913	2140	936	2238	959	2338	982	2440	1004	2544	1026	2652	1048	2761	1070	2873
3900 [1840]	638	1235	663	1305	687	1378	711	1453	735	1531	758	1611	782	1693	805	1778	829	1865	852	1955	875	2047	898	2141	920	2238	943	2338	965	2439	987	2544	1009	2650	1031	2759	1053	2870	1075	2984
4000 [1888]	650	1313	674	1385	698	1460	722	1537	745	1617	768	1699	791	1783	814	1870	837	1959	860	2050	883	2144	905	2241	927	2340	949	2441	971	2545	993	2651	1015	2759	1036	2870	1058	2983	1079	3099
4100 [1935]	662	1395	686	1469	709	1545	732	1625	755	1706	778	1790	801	1876	824	1965	846	2056	869	2149	891	2245	913	2344	935	2444	956	2548	978	2653	999	2761	1021	2872	1042	2984	1063	3100	1083	3217
4200 [1982]	675	1480	698	1556	721	1634	743	1715	766	1799	789	1884	811	1973	833	2063	855	2156	877	2252	899	2349	921	2450	942	2552	963	2658	985	2765	1006	2875	1027	2987	1047	3102	1068	3219	1088	3339
4300 [2029]	687	1568	710	1646	732	1726	755	1809	777	1895	799	1982	821	2072	843	2165	865	2260	886	2357	908	2457	929	2559	950	2664	971	2771	992	2880	1012	2992	1033	3106	1053	3223	1073	3342	1093	3464
4400 [2076]	700	1660	722	1740	744	1822	766	1907	788	1994	810	2084	832	2176	853	2270	874	2367	895	2466	916	2568	937	2672	958	2779	978	2888	999	2999	1019	3113	1039	3229	1059	3347	1079	3468	1098	3592
4500 [2123]	713	1755	735	1837	756	1921	778	2008	800	2097	821	2188	842	2282	863	2379	884	2477	905	2579	925	2682	946	2788	966	2897	986	3008	1006	3121	1026	3237	1046	3355	1065	3475	1085	3598	—	—
4600 [2171]	726	1853	747	1937	769	2023	790	2112	811	2203	832	2296	853	2392	873	2490	894	2591	914	2694	934	2800	955	2908	974	3018	994	3131	1014	3246	1033	3364	1052	3484	1072	3606	1091	3731	—	—
4700 [2218]	739	1955	760	2041	781	2129	802	2219	823	2312	843	2408	864	2505	884	2606	904	2708	924	2813	944	2921	964	3031	983	3143	1002	3258	1022	3375	1041	3494	1059	3616	1078	3741	1097	3867	—	—
4800 [2265]	753	2060	773	2148	794	2238	814	2330	835	2425	855	2522	875	2622	895	2724	915	2829	934	2936	953	3045	973	3157	992	3271	1011	3388	1030	3507	1048	3628	1067	3752	1085	3878	—	—		

NOTE: F-Drive left of the bold line, G-Drive right of the bold line, H-Drive right of second bold line.

Drive Package	F												G												H													
Motor H.P. [W]	2 [1491.4]												3 [2237.1]												3 [2237.1]													
Blower Sheave	AK79H												AK79H												AK79H													
Motor Sheave	1VP40												1VP50												1VP56													
Belt	A49												A50												A51													
Turns Open	0	1	2	3	4	5	588	1029	991	950	908	866	824	788	752	716	680	644	608	572	536	500	464	428	392	356	320	284	248	212	176	140	104	68	32	—	—	—
RPM	797	757	715	675	634	588	548	508	468	428	388	348	308	268	228	188	148	108	68	28	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—	—

NOTES: 1. Do not set motor sheave below minimum or maximum turns open shown.

2. Re-adjustment of sheave required to achieve rated airflow at AHRl minimum External Static Pressure

3. Drive data shown is for horizontal airflow with dry coil. Add component resistance (below) to duct resistance to determine total External Static Pressure.

4. Factory sheave settings are shown in bold type.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE—10 TON [35.1 kW] — 60 Hz — DOWNFLOW (CONTINUED)

Airflow	AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE						
	CFM [L/s]	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Vertical Economizer RA Damper Open	Concentric Diffuser RXRN-AEF3415 & Concentric Adapter RXMC-DD02 (Flush)	Concentric Diffuser RXRN-AED3415 & Concentric Adapter RXMC-DD02 (Drop)	Pressure Drop MERV 8	Pressure Drop MERV 13
3200 [1510]	0.97	0.93	0.99	0.10 [.02]	0.07 [.02]		0.74 [.18]	0.56 [.14]	0.132 [.03]	0.108 [.03]
3300 [1557]	0.98	0.94	0.99	0.10 [.03]	0.08 [.02]		0.79 [.20]	0.59 [.15]	0.137 [.03]	0.115 [.03]
3400 [1604]	0.98	0.96	0.99	0.11 [.03]	0.09 [.02]		0.84 [.21]	0.62 [.15]	0.142 [.03]	0.123 [.03]
3500 [1652]	0.99	0.97	1.00	0.11 [.03]	0.10 [.02]		0.90 [.22]	0.66 [.16]	0.147 [.04]	0.131 [.03]
3600 [1699]	0.99	0.98	1.00	0.12 [.03]	0.11 [.03]		0.95 [.24]	0.69 [.17]	0.152 [.04]	0.138 [.03]
3700 [1746]	1.00	0.99	1.00	0.13 [.03]	0.12 [.03]		1.00 [.25]	0.73 [.18]	0.157 [.04]	0.146 [.04]
3800 [1793]	1.00	1.01	1.00	0.13 [.03]	0.13 [.03]		1.04 [.26]	0.76 [.19]	0.162 [.04]	0.153 [.04]
3900 [1840]	1.01	1.02	1.00	0.14 [.04]	0.15 [.04]		1.09 [.27]	0.80 [.20]	0.167 [.04]	0.161 [.04]
4000 [1888]	1.01	1.03	1.01	0.15 [.04]	0.16 [.04]		1.13 [.28]	0.84 [.21]	0.171 [.04]	0.169 [.04]
4100 [1935]	1.02	1.04	1.01	0.15 [.04]	0.17 [.04]		1.19 [.30]	0.88 [.22]	0.176 [.04]	0.176 [.04]
4200 [1982]	1.02	1.06	1.01	0.16 [.04]	0.19 [.05]		1.24 [.31]	0.92 [.23]	0.181 [.04]	0.184 [.05]
4300 [2029]	1.03	1.07	1.01	0.17 [.04]	0.20 [.05]		1.31 [.33]	0.97 [.24]	0.186 [.05]	0.191 [.05]
4400 [2076]	1.03	1.08	1.01	0.18 [.04]	0.21 [.05]		1.37 [.34]	1.02 [.25]	0.191 [.05]	0.199 [.05]
4500 [2123]	1.04	1.09	1.02	0.19 [.05]	0.23 [.06]		1.43 [.35]	1.07 [.27]	0.196 [.05]	0.207 [.05]
4600 [2171]	1.04	1.11	1.02	0.19 [.05]	0.24 [.06]		1.48 [.37]	1.11 [.28]	0.201 [.05]	0.214 [.05]
4700 [2218]	1.05	1.12	1.02	0.20 [.05]	0.26 [.06]		1.54 [.38]	1.15 [.29]	0.206 [.05]	0.222 [.05]
4800 [2265]	1.05	1.13	1.02	0.21 [.05]	0.28 [.07]		1.59 [.40]	1.19 [.30]	0.211 [.05]	0.229 [.06]

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE—10 TON [35.1 kW] — 60 Hz — SIDEFLOW (CONTINUED)

Airflow	AIRFLOW CORRECTION FACTORS *			COMPONENT AIRFLOW RESISTANCE						
	CFM [L/s]	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Horizontal Economizer RA Damper Open	Concentric Diffuser RXRN-AEF3415 & Concentric Adapter RXMC-DD02 (Flush)	Concentric Diffuser RXRN-AED3415 & Concentric Adapter RXMC-DD02 (Drop)	Pressure Drop MERV 8	Pressure Drop MERV 13
3200 [1510]	0.97	0.93	0.99	0.10 [0.02]	0.51 [1.13]	0.74 [1.18]	0.56 [1.14]	0.132 [0.03]	0.108 [0.03]	
3300 [1557]	0.98	0.94	0.99	0.10 [0.03]	0.54 [1.14]	0.79 [1.20]	0.59 [1.15]	0.137 [0.03]	0.115 [0.03]	
3400 [1604]	0.98	0.96	0.99	0.11 [0.03]	0.58 [1.14]	0.84 [1.21]	0.62 [1.15]	0.142 [0.03]	0.123 [0.03]	
3500 [1652]	0.99	0.97	1.00	0.11 [0.03]	0.62 [1.15]	0.90 [1.22]	0.66 [1.16]	0.147 [0.04]	0.131 [0.03]	
3600 [1699]	0.99	0.98	1.00	0.12 [0.03]	0.66 [1.16]	0.95 [1.24]	0.69 [1.17]	0.152 [0.04]	0.138 [0.03]	
3700 [1746]	1.00	0.99	1.00	0.13 [0.03]	0.70 [1.17]	1.00 [1.25]	0.73 [1.18]	0.157 [0.04]	0.146 [0.04]	
3800 [1793]	1.00	1.01	1.00	0.13 [0.03]	0.74 [1.18]	1.04 [1.26]	0.76 [1.19]	0.162 [0.04]	0.153 [0.04]	
3900 [1840]	1.01	1.02	1.00	0.14 [0.04]	0.77 [1.19]	1.09 [1.27]	0.80 [1.20]	0.167 [0.04]	0.161 [0.04]	
4000 [1888]	1.01	1.03	1.01	0.15 [0.04]	0.81 [1.20]	1.13 [1.28]	0.84 [1.21]	0.171 [0.04]	0.169 [0.04]	
4100 [1935]	1.02	1.04	1.01	0.15 [0.04]	0.85 [1.21]	1.19 [1.30]	0.88 [1.22]	0.176 [0.04]	0.176 [0.04]	
4200 [1982]	1.02	1.06	1.01	0.16 [0.04]	0.89 [1.22]	1.24 [1.31]	0.92 [1.23]	0.181 [0.04]	0.184 [0.05]	
4300 [2029]	1.03	1.07	1.01	0.17 [0.04]	0.93 [1.23]	1.31 [1.33]	0.97 [1.24]	0.186 [0.05]	0.191 [0.05]	
4400 [2076]	1.03	1.08	1.01	0.18 [0.04]	0.97 [1.24]	1.37 [1.34]	1.02 [1.25]	0.191 [0.05]	0.199 [0.05]	
4500 [2123]	1.04	1.09	1.02	0.19 [0.05]	1.01 [1.25]	1.43 [1.35]	1.07 [1.27]	0.196 [0.05]	0.207 [0.05]	
4600 [2171]	1.04	1.11	1.02	0.19 [0.05]	1.06 [1.26]	1.48 [1.37]	1.11 [1.28]	0.201 [0.05]	0.214 [0.05]	
4700 [2218]	1.05	1.12	1.02	0.20 [0.05]	1.10 [1.27]	1.54 [1.38]	1.15 [1.29]	0.206 [0.05]	0.222 [0.05]	
4800 [2265]	1.05	1.13	1.02	0.21 [0.05]	1.14 [1.28]	1.59 [1.40]	1.19 [1.30]	0.211 [0.05]	0.229 [0.06]	

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE— 12.5 TON [43.9 kW] — 60 Hz — DOWNFLOW

Air Flow CFM [L/s]	Model RACDVB150 Voltage 208/230, 460, 575 — 3 phase 60 Hz															
	External Static Pressure—Inches of Water [kPa]															
	0.1 [0.02] RPM	0.2 [0.05] W	0.3 [0.07] RPM	0.4 [0.10] W	0.5 [0.12] RPM	0.6 [0.15] W	0.7 [0.17] RPM	0.8 [0.20] W	0.9 [0.22] RPM	1.0 [0.25] W	1.1 [0.27] RPM	1.2 [0.30] W	1.3 [0.32] RPM	1.4 [0.35] W	1.5 [0.37] RPM	1.6 [0.40] W
4000 [1888]	—	—	—	771	1657	795	1721	818	1785	841	1849	863	1914	886	1979	908
4100 [1935]	—	—	—	784	1731	807	1797	829	1863	852	1929	874	1996	897	2063	918
4200 [1982]	—	—	—	773	1742	796	1810	819	1883	831	1946	864	2014	886	2083	907
4300 [2029]	—	—	—	—	—	764	1755	786	1824	809	1893	831	1963	853	2033	875
4400 [2076]	—	—	—	—	—	777	1839	800	1910	822	1982	844	2054	866	2126	887
4500 [2123]	769	1855	791	1928	813	2002	835	2075	856	2149	878	2224	899	2299	920	2374
4600 [2171]	783	1947	805	2022	826	2098	848	2174	869	2250	890	2327	911	2404	932	2481
4700 [2218]	797	2044	818	2122	840	2199	861	2277	882	2355	903	2434	923	2513	944	2593
4800 [2265]	811	2146	832	2226	854	2305	874	2385	895	2466	916	2547	936	2628	956	2710
4900 [2312]	826	2253	847	2335	867	2416	888	2499	908	2581	928	2664	948	2748	968	2831
5000 [2359]	840	2365	861	2448	881	2532	901	2617	921	2701	941	2787	961	2872	980	2958
5100 [2407]	855	2482	875	2567	895	2653	915	2740	935	2827	954	2914	973	3002	992	3090
5200 [2454]	870	2603	890	2691	909	2779	929	2868	948	2957	967	3046	986	3136	1005	3226
5300 [2501]	885	2730	904	2820	924	2910	943	3001	962	3092	981	3183	999	3275	1017	3368
5400 [2548]	900	2861	919	2953	938	3046	957	3139	976	3232	994	3325	1012	3419	1030	3514
5500 [2595]	915	2998	934	3092	953	3187	971	3282	989	3377	1007	3473	1025	3569	1043	3665
5600 [2643]	930	3139	949	3236	967	3332	985	3429	1003	3527	1021	3625	1039	3723	1056	3822
5700 [2690]	946	3286	964	3384	982	3483	1000	3582	1017	3682	1035	3782	1052	3882	1069	3983
5800 [2737]	961	3437	979	3537	997	3638	1014	3740	1032	3841	1049	3943	1066	4046	1082	4149
5900 [2784]	977	3593	994	3696	1012	3799	1029	3902	1046	4006	1063	4110	1079	4215	1096	4320
6000 [2831]	993	3754	1010	3859	1027	3964	1044	4070	1060	4176	1077	4282	1093	4389	1109	4496

NOTE: F-Drive left of the bold line, G-Drive right of the bold line, H-Drive right of second bold line.

Drive Package	F					G				
Motor H.P. [W]	3 [2237.1]					5 [3728.5]				
Blower Sheave	AK71H					AK79H				
Motor Sheave	1VL44					1VP60				
Belt	A48					A52				
Turns Open	0	1	2	3	4	5	0	1	2	3
RPM	998	953	906	860	813	765	1210	1168	1125	1081
							1037			993

- NOTES: 1. Do not set motor sheave below minimum or maximum turns open shown.
2. Re-adjustment of sheave required to achieve rated airflow at AHRI minimum External Static Pressure
3. Drive data shown is for horizontal airflow with dry coil. Add component resistance (below) to duct resistance to determine total External Static Pressure.
4. Factory sheave settings are shown in bold type.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE — 12.5 TON [43.9 kW] — 60 Hz — DOWNFLOW (CONTINUED)

Airflow	AIRFLOW CORRECTION FACTORS *				COMPONENT AIRFLOW RESISTANCE						
	CFM [L/s]	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Vertical Economizer RA Damper Open	Concentric Diffuser RXRN-AEF3618 & Concentric Adapter RXMC-DD03 (Flush)	Concentric Diffuser RXRN-AED3618 & Concentric Adapter RXMC-DD03 (Drop)	Pressure Drop MERV 8	Pressure Drop MERV 13	
							Resistance — Inches of Water [kPa]				
4000 [1888]	1.01	1.03	1.01	1.01	0.15 [.04]	0.16 [.04]	0.76 [.19]	0.68 [.17]	0.132 [.03]	0.108 [.03]	
4100 [1935]	1.02	1.04	1.01	1.01	0.16 [.04]	0.17 [.04]	0.79 [.20]	0.72 [.18]	0.136 [.03]	0.114 [.03]	
4200 [1982]	1.02	1.06	1.01	1.01	0.17 [.04]	0.19 [.05]	0.82 [.20]	0.75 [.19]	0.140 [.03]	0.120 [.03]	
4300 [2029]	1.03	1.07	1.01	1.01	0.17 [.04]	0.20 [.05]	0.86 [.21]	0.79 [.20]	0.144 [.03]	0.126 [.03]	
4400 [2076]	1.03	1.08	1.01	1.01	0.18 [.05]	0.21 [.05]	0.90 [.22]	0.83 [.21]	0.148 [.04]	0.132 [.03]	
4500 [2123]	1.04	1.09	1.02	1.02	0.19 [.05]	0.23 [.06]	0.94 [.23]	0.86 [.21]	0.152 [.04]	0.138 [.03]	
4600 [2171]	1.04	1.11	1.02	1.02	0.20 [.05]	0.24 [.06]	0.98 [.24]	0.89 [.22]	0.156 [.04]	0.145 [.04]	
4700 [2218]	1.05	1.12	1.02	1.02	0.21 [.05]	0.26 [.06]	1.02 [.25]	0.94 [.23]	0.160 [.04]	0.151 [.04]	
4800 [2265]	1.05	1.13	1.02	1.02	0.21 [.05]	0.28 [.07]	1.06 [.26]	0.98 [.24]	0.164 [.04]	0.157 [.04]	
4900 [2312]	1.06	1.14	1.02	1.02	0.22 [.06]	0.29 [.07]	1.10 [.27]	1.01 [.25]	0.168 [.04]	0.163 [.04]	
5000 [2359]	1.06	1.16	1.03	1.03	0.23 [.06]	0.31 [.08]	1.14 [.28]	1.04 [.26]	0.172 [.04]	0.169 [.04]	
5100 [2407]	1.07	1.17	1.03	1.03	0.24 [.06]	0.33 [.08]	1.18 [.29]	1.07 [.27]	0.176 [.04]	0.175 [.04]	
5200 [2454]	1.07	1.18	1.03	1.03	0.25 [.06]	0.35 [.09]	1.22 [.30]	1.10 [.27]	0.180 [.04]	0.182 [.04]	
5300 [2501]	1.08	1.19	1.03	1.03	0.26 [.06]	0.36 [.09]	1.27 [.32]	1.15 [.29]	0.184 [.05]	0.188 [.05]	
5400 [2548]	1.08	1.21	1.03	1.03	0.27 [.07]	0.38 [.09]	1.33 [.33]	1.20 [.30]	0.188 [.05]	0.194 [.05]	
5500 [2595]	1.09	1.22	1.04	1.04	0.28 [.07]	0.40 [.10]	1.37 [.34]	1.25 [.31]	0.192 [.05]	0.200 [.05]	
5600 [2643]	1.09	1.23	1.04	1.04	0.29 [.07]	0.42 [.10]	1.42 [.35]	1.30 [.32]	0.196 [.05]	0.206 [.05]	
5700 [2690]	1.10	1.24	1.04	1.04	0.30 [.07]	0.44 [.11]	1.47 [.37]	1.34 [.33]	0.200 [.05]	0.212 [.05]	
5800 [2737]	1.10	1.26	1.04	1.04	0.31 [.08]	0.46 [.11]	1.52 [.38]	1.38 [.34]	0.204 [.05]	0.219 [.05]	
5900 [2784]	1.10	1.27	1.05	1.05	0.32 [.08]	0.48 [.12]	1.56 [.39]	1.42 [.35]	0.208 [.05]	0.225 [.05]	
6000 [2831]	1.11	1.28	1.05	1.05	0.33 [.08]	0.51 [.13]	1.60 [.40]	1.45 [.36]	0.212 [.05]	0.231 [.06]	

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

AIRFLOW PERFORMANCE—12.5 TON [43.9 kW] — 60 Hz — SIDEFLOW (CONTINUED)

Airflow	AIRFLOW CORRECTION FACTORS *				COMPONENT AIRFLOW RESISTANCE					
	CFM [L/s]	Total kBtu/h	Sensible kBtu/h	Power kW	Wet Coil	Horizontal Economizer RA Damper Open	Concentric Diffuser RXRN-AEF3618 & Concentric Adapter RXMC-DD03 (Flush)	Concentric Diffuser RXRN-AED3618 & Concentric Adapter RXMC-DD03 (Drop)	Pressure Drop MERV 8	Pressure Drop MERV 13
4000 [1888]	1.01	1.03	1.01	1.01	0.15 [.04]	0.73 [.18]	0.76 [.19]	0.68 [.17]	0.132 [.03]	0.108 [.03]
4100 [1935]	1.02	1.04	1.01	1.01	0.16 [.04]	0.78 [.19]	0.79 [.20]	0.72 [.18]	0.136 [.03]	0.114 [.03]
4200 [1982]	1.02	1.06	1.01	1.01	0.17 [.04]	0.83 [.21]	0.82 [.20]	0.75 [.19]	0.140 [.03]	0.120 [.03]
4300 [2029]	1.03	1.07	1.01	1.01	0.17 [.04]	0.88 [.22]	0.86 [.21]	0.79 [.20]	0.144 [.03]	0.126 [.03]
4400 [2076]	1.03	1.08	1.01	1.01	0.18 [.05]	0.93 [.23]	0.90 [.22]	0.83 [.21]	0.148 [.04]	0.132 [.03]
4500 [2123]	1.04	1.09	1.02	1.02	0.19 [.05]	0.98 [.24]	0.94 [.23]	0.86 [.21]	0.152 [.04]	0.138 [.03]
4600 [2171]	1.04	1.11	1.02	1.02	0.20 [.05]	1.03 [.26]	0.98 [.24]	0.89 [.22]	0.156 [.04]	0.145 [.04]
4700 [2218]	1.05	1.12	1.02	1.02	0.21 [.05]	1.07 [.27]	1.02 [.25]	0.94 [.23]	0.160 [.04]	0.151 [.04]
4800 [2265]	1.05	1.13	1.02	1.02	0.21 [.05]	1.12 [.28]	1.06 [.26]	0.98 [.24]	0.164 [.04]	0.157 [.04]
4900 [2312]	1.06	1.14	1.02	1.02	0.22 [.06]	1.17 [.29]	1.10 [.27]	1.01 [.25]	0.168 [.04]	0.163 [.04]
5000 [2359]	1.06	1.16	1.03	1.03	0.23 [.06]	1.21 [.30]	1.14 [.28]	1.04 [.26]	0.172 [.04]	0.169 [.04]
5100 [2407]	1.07	1.17	1.03	1.03	0.24 [.06]	1.26 [.31]	1.18 [.29]	1.07 [.27]	0.176 [.04]	0.175 [.04]
5200 [2454]	1.07	1.18	1.03	1.03	0.25 [.06]	1.30 [.32]	1.22 [.30]	1.10 [.27]	0.180 [.04]	0.182 [.04]
5300 [2501]	1.08	1.19	1.03	1.03	0.26 [.06]	1.35 [.34]	1.27 [.32]	1.15 [.29]	0.184 [.05]	0.188 [.05]
5400 [2548]	1.08	1.21	1.03	1.03	0.27 [.07]	1.39 [.35]	1.33 [.33]	1.20 [.30]	0.188 [.05]	0.194 [.05]
5500 [2595]	1.09	1.22	1.04	1.04	0.28 [.07]	1.44 [.36]	1.37 [.34]	1.25 [.31]	0.192 [.05]	0.200 [.05]
5600 [2643]	1.09	1.23	1.04	1.04	0.29 [.07]	1.48 [.37]	1.42 [.35]	1.30 [.32]	0.196 [.05]	0.206 [.05]
5700 [2690]	1.10	1.24	1.04	1.04	0.30 [.07]	1.52 [.38]	1.47 [.37]	1.34 [.33]	0.200 [.05]	0.212 [.05]
5800 [2737]	1.10	1.26	1.04	1.04	0.31 [.08]	1.57 [.39]	1.52 [.38]	1.38 [.34]	0.204 [.05]	0.219 [.05]
5900 [2784]	1.10	1.27	1.05	1.05	0.32 [.08]	1.61 [.40]	1.56 [.39]	1.42 [.35]	0.208 [.05]	0.225 [.05]
6000 [2831]	1.11	1.28	1.05	1.05	0.33 [.08]	1.65 [.41]	1.60 [.40]	1.45 [.36]	0.212 [.05]	0.231 [.06]

*Multiply correction factor times gross performance data resulting sensible capacity cannot exceed total capacity.

[] Designates Metric Conversions

ELECTRICAL DATA – RACDYB SERIES

		090ACF	090ACG 090ACH	090ADF	090ADG 090ADH	090AYF	090AYG 090AYH
Unit Information	Unit Operating Voltage Range	187-253	187-253	414-506	414-506	518-633	518-633
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Hz	60	60	60	60	60	60
	Minimum Circuit Ampacity	41/41	44/44	18	20	15	16
	Minimum Circuit Ampacity with Power Exhaust	46/46	49/49	21	23	17	18
	Minimum Overcurrent Protection Device Size	50/50	50/50	25	25	20	20
	Minimum Overcurrent Protection Device Size with Power Exhaust	60/60	60/60	25	25	20	20
	Maximum Overcurrent Protection Device Size	60/60	60/60	25	30	20	20
	Maximum Overcurrent Protection Device Size with Power Exhaust	70/70	70/70	30	30	25	25
Compressor Motor	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Amps (RLA), Comp. 1	25.2	25.2	10.6	10.6	8.6	8.6
	Amps (LRA), Comp. 1	178.5	178.5	79.1	79.1	65.0	65.0
Condenser Motor	No.	2	2	2	2	2	2
	Volts	208/230	208/230	460	460	575	575
	Phase	1	1	1	1	1	1
	HP	1/5	1/5	1/5	1/5	1/5	1/5
	Amps (FLA, each)	1.2	1.2	0.8	0.8	0.6	0.6
	Amps (LRA, each)	2.3	2.3	1.4	1.4	1.1	1.1
Evaporator Fan	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	HP	2	3	2	3	2	3
	Amps (FLA, each)	6.2	9.2	3.0	4.6	2.4	3.5
	Amps (LRA, each)	47.0	74.5	24.0	38.1	19.0	30.0

ELECTRICAL DATA – RACDYB SERIES

		102ACF	102ACG 102ACH	102ADF	102ADG 102ADH	102AYF	102AYG 102AYH
Unit Information	Unit Operating Voltage Range	187-253	187-253	414-506	414-506	518-633	518-633
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Hz	60	60	60	60	60	60
	Minimum Circuit Ampacity	43/43	46/46	21	22	16	17
	Minimum Circuit Ampacity with Power Exhaust	48/48	51/51	23	25	18	19
	Minimum Overcurrent Protection Device Size	50/50	60/60	25	25	20	20
	Minimum Overcurrent Protection Device Size with Power Exhaust	60/60	60/60	30	30	20	25
	Maximum Overcurrent Protection Device Size	60/60	70/70	30	30	20	25
	Maximum Overcurrent Protection Device Size with Power Exhaust	70/70	70/70	35	35	25	25
Compressor Motor	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Amps (RLA), Comp. 1	26.8	26.8	12.5	12.5	9.4	9.4
	Amps (LRA), Comp. 1	190.7	190.7	100.2	100.2	65.0	65.0
Condenser Motor	No.	2	2	2	2	2	2
	Volts	208/230	208/230	460	460	575	575
	Phase	1	1	1	1	1	1
	HP	1/5	1/5	1/5	1/5	1/5	1/5
	Amps (FLA, each)	1.2	1.2	0.8	0.8	0.6	0.6
	Amps (LRA, each)	2.3	2.3	1.4	1.4	1.1	1.1
Evaporator Fan	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	HP	2	3	2	3	2	3
	Amps (FLA, each)	6.2	9.2	3.0	4.6	2.4	3.5
	Amps (LRA, each)	47.0	74.5	24.0	38.1	19.0	30.0

ELECTRICAL DATA – RACDYB SERIES

		120ACF	120ACG 120ACH	120ADF	120ADG 120ADH	120AYF	120AYG 120AYH
Unit Information	Unit Operating Voltage Range	187-253	187-253	414-506	414-506	518-633	518-633
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Hz	60	60	60	60	60	60
	Minimum Circuit Ampacity	45/45	48/48	24	25	19	20
	Minimum Circuit Ampacity with Power Exhaust	50/50	53/53	26	28	21	22
	Minimum Overcurrent Protection Device Size	60/60	60/60	30	30	25	25
	Minimum Overcurrent Protection Device Size with Power Exhaust	60/60	60/60	30	35	25	25
	Maximum Overcurrent Protection Device Size	70/70	70/70	35	35	30	30
	Maximum Overcurrent Protection Device Size with Power Exhaust	70/70	70/70	35	40	30	30
Compressor Motor	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Amps (RLA), Comp. 1	26.5	26.5	14.0	14.0	11.5	11.5
	Amps (LRA), Comp. 1	255.0	255.0	123.0	123.0	93.7	93.7
Condenser Motor	No.	2	2	2	2	2	2
	Volts	208/230	208/230	460	460	575	575
	Phase	1	1	1	1	1	1
	HP	1/3	1/3	1/3	1/3	1/3	1/3
	Amps (FLA, each)	2.4	2.4	1.4	1.4	1.0	1.0
	Amps (LRA, each)	4.7	4.7	2.4	2.4	4.7	4.7
Evaporator Fan	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	HP	2	3	2	3	2	3
	Amps (FLA, each)	6.2	9.2	3.0	4.6	2.4	3.5
	Amps (LRA, each)	47.0	74.5	24.0	38.1	19.0	30.0

ELECTRICAL DATA – RACDYB SERIES							
		150ACF	150ACG	150ADF	150ADG	150AYF	150AYG
Unit Information	Unit Operating Voltage Range	187-253	187-253	414-506	414-506	518-633	518-633
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Hz	60	60	60	60	60	60
	Minimum Circuit Ampacity	68/68	75/75	29	31	23	24
	Minimum Circuit Ampacity with Power Exhaust	74/74	80/80	32	34	25	26
	Minimum Overcurrent Protection Device Size	80/80	90/90	35	35	25	30
	Minimum Overcurrent Protection Device Size with Power Exhaust	80/80	90/90	35	40	30	30
	Maximum Overcurrent Protection Device Size	90/90	90/90	35	35	25	30
	Maximum Overcurrent Protection Device Size with Power Exhaust	90/90	100/100	40	40	30	30
Compressor Motor	No.	2	2	2	2	2	2
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	Amps (RLA), Comp. 1	22.4	22.4	8.8	8.8	7.2	7.2
	Amps (LRA), Comp. 1	166.2	166.2	74.6	74.6	54.0	54.0
	Amps (RLA), Comp. 2	22.4	22.4	8.8	8.8	7.2	7.2
	Amps (LRA), Comp. 2	166.2	166.2	74.6	74.6	54.0	54.0
Condenser Motor	No.	2	2	2	2	2	2
	Volts	208/230	208/230	460	460	575	575
	Phase	1	1	1	1	1	1
	HP	3/4	3/4	3/4	3/4	3/4	3/4
	Amps (FLA, each)	4.2	4.2	2.3	2.3	1.2	1.2
	Amps (LRA, each)	11.5	11.5	5.9	5.9	4.2	4.2
Evaporator Fan	No.	1	1	1	1	1	1
	Volts	208/230	208/230	460	460	575	575
	Phase	3	3	3	3	3	3
	HP	3	5	3	5	3	5
	Amps (FLA, each)	9.2	15.7	4.6	6.3	3.5	5.1
	Amps (LRA, each)	74.5	95.0	38.1	47.5	30.0	38.0

208/230 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Single Power Supply For Both Unit and Heater Kit							Separate Power Supply For Both Unit and Heater Kit						
Unit Model No. RACDYB	Heater Kit			Air Conditioner				Heater Kit		Air Conditioner			
	Model No. RXJJ-	Rated Heater kW @ 208/230V	FLA	Unit Min. Ckt. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Size	Max. Fuse or Ckt. Bkr. Size With Optional Powered Exhaust	Heater Kit Min.Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity	Air Cond. Min. Ckt.Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust
090ACF	None	—/—	—/—	41/41	46/46	60/60	70/70	—	—	41/41	46/46	60/60	70/70
	DD10CP	7.4/9.9	20.6/23.8	41/41	46/46	60/60	70/70	26/30	30/30	41/41	46/46	60/60	70/70
	DD15CP	10.8/14.4	30.0/34.6	46/51	52/58	60/60	70/70	38/44	40/45	41/41	46/46	60/60	70/70
	DD20CP	14.8/19.8	41.2/47.6	60/68	66/74	60/70	70/80	52/60	60/60	41/41	46/46	60/60	70/70
	DD30CP	21.6/28.8	60.0/69.3	83/95	90/102	90/100	90/110	75/87	80/90	41/41	46/46	60/60	70/70
090ACG	DD40CP	29.7/39.6	82.4/95.2	111/127	118/134	125/150	125/150	103/119	110/125	41/41	46/46	60/60	70/70
	None	—/—	—/—	44/44	49/49	60/60	70/70	—	—	44/44	49/49	60/60	70/70
	DD10CP	7.4/9.9	20.6/23.8	44/44	49/49	60/60	70/70	26/30	30/30	44/44	49/49	60/60	70/70
	DD15CP	10.8/14.4	30.0/34.6	49/55	56/62	60/60	70/70	38/44	40/45	44/44	49/49	60/60	70/70
	DD20CP	14.8/19.8	41.2/47.6	63/71	70/78	70/80	70/80	52/60	60/60	44/44	49/49	60/60	70/70
090ACH	DD30CP	21.6/28.8	60.0/69.3	87/99	94/105	90/100	100/110	75/87	80/90	44/44	49/49	60/60	70/70
	DD40CP	29.7/39.6	82.4/95.2	115/131	122/138	125/150	125/150	103/119	110/125	44/44	49/49	60/60	70/70
	None	—/—	—/—	44/44	49/49	60/60	70/70	—	—	44/44	49/49	60/60	70/70
	DD10CP	7.4/9.9	20.6/23.8	44/44	49/49	60/60	70/70	26/30	30/30	44/44	49/49	60/60	70/70
	DD15CP	10.8/14.4	30.0/34.6	49/55	56/62	60/60	70/70	38/44	40/45	44/44	49/49	60/60	70/70
090ACH	DD20CP	14.8/19.8	41.2/47.6	63/71	70/78	70/80	70/80	52/60	60/60	44/44	49/49	60/60	70/70
	DD30CP	21.6/28.8	60.0/69.3	87/99	94/105	90/100	100/110	75/87	80/90	44/44	49/49	60/60	70/70
	DD40CP	29.7/39.6	82.4/95.2	115/131	122/138	125/150	125/150	103/119	110/125	44/44	49/49	60/60	70/70

460 VOLT, THREE PHASE, 60 Hz, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Single Power Supply For Both Unit and Heater Kit						Separate Power Supply For Both Unit and Heater Kit						
Unit Model No. RACDYB	Heater Kit			Air Conditioner			Heater Kit		Air Conditioner			
	Model No. RXJJ-	Rated Heater kW @ 460V	FLA	Unit Min. Ckt. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Bkr. Size	Heater Kit Min. Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust
090ADF	NONE	—	—	18	21	25	—	—	18	25	21	30
	DD10DNV	9.9	11.9	19	22	25	15	15	18	25	21	30
	DD15DNV	14.4	17.3	26	29	30	22	25	18	25	21	30
	DD20DNV	19.8	23.8	34	37	35	30	30	18	25	21	30
	DD30DNV	28.8	34.6	47	51	50	44	45	18	25	21	30
	DD40DNV	39.6	47.6	64	67	70	60	60	18	25	21	30
090ADG	NONE	—	—	20	23	30	—	—	20	30	23	30
	DD10DNV	9.9	11.9	21	24	30	15	15	20	30	23	30
	DD15DNV	14.4	17.3	28	31	30	22	25	20	30	23	30
	DD20DNV	19.8	23.8	36	39	40	30	30	20	30	23	30
	DD30DNV	28.8	34.6	49	53	50	44	45	20	30	23	30
	DD40DNV	39.6	47.6	66	69	70	60	60	20	30	23	30
090ADH	NONE	—	—	20	23	30	—	—	20	30	23	30
	DD10DNV	9.9	11.9	21	24	30	15	15	20	30	23	30
	DD15DNV	14.4	17.3	28	31	30	22	25	20	30	23	30
	DD20DNV	19.8	23.8	36	39	40	30	30	20	30	23	30
	DD30DNV	28.8	34.6	49	53	50	44	45	20	30	23	30
	DD40DNV	39.6	47.6	66	69	70	60	60	20	30	23	30

575 VOLT, THREE PHASE, 60 Hz, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Single Power Supply For Both Unit and Heater Kit							Separate Power Supply For Both Unit and Heater Kit						
Unit Model No. RACDYB	Heater Kit			Air Conditioner				Heater Kit		Air Conditioner			
	Model No. RXJJ-	Rated Heater kW @ 575V	FLA	Unit Min. Ckt. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Bkr. Size	Max. Fuse or Ckt. Bkr. Size With Optional Powered Exhaust	Heater Kit Min. Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust
090AYF	NONE	—	—	15	17	20	25	—	—	15	17	20	25
	DD10Y	10.0	9.6	16	18	20	25	13	15	15	17	20	25
	DD15Y	15.0	14.4	22	24	25	25	19	20	15	17	20	25
	DD20Y	20.0	19.3	28	30	30	30	25	25	15	17	20	25
	DD30Y	30.0	28.9	40	42	40	45	37	40	15	17	20	25
	DD40Y	40.0	38.5	52	54	60	60	49	50	15	17	20	25
090AYG	NONE	—	—	16	18	20	25	—	—	16	18	20	25
	DD10Y	10.0	9.6	17	20	20	25	13	15	16	18	20	25
	DD15Y	15.0	14.4	23	26	25	30	19	20	16	18	20	25
	DD20Y	20.0	19.3	29	32	30	35	25	25	16	18	20	25
	DD30Y	30.0	28.9	41	44	45	45	37	40	16	18	20	25
	DD40Y	40.0	38.5	53	56	60	60	49	50	16	18	20	25
090AYH	NONE	—	—	16	18	20	25	—	—	16	18	20	25
	DD10Y	10.0	9.6	17	20	20	25	13	15	16	18	20	25
	DD15Y	15.0	14.4	23	26	25	30	19	20	16	18	20	25
	DD20Y	20.0	19.3	29	32	30	35	25	25	16	18	20	25
	DD30Y	30.0	28.9	41	44	45	45	37	40	16	18	20	25
	DD40Y	40.0	38.5	53	56	60	60	49	50	16	18	20	25

208/230 VOLT, THREE PHASE, 60 Hz, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Single Power Supply For Both Unit and Heater Kit							Separate Power Supply For Both Unit and Heater Kit						
Unit Model No. RACDYB	Heater Kit			Air Conditioner			Heater Kit		Air Conditioner				
	Model No. RXJJ-	Rated Heater kW @ 208/230V	FLA	Unit Min. Ckt. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Size	Heater Kit Min. Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust
102ACF	NONE	—/—	—/—	43/43	48/48	60/60	—	—	43/43	60/60	48/48	60/60	70/70
	DD10CP	7.4/9.9	20.6/23.8	43/43	48/48	60/60	26/30	30/30	43/43	60/60	48/48	60/60	70/70
	DD15CP	10.8/14.4	30.0/34.6	46/51	52/58	60/60	38/44	40/45	43/43	60/60	48/48	60/60	70/70
	DD20CP	14.8/19.8	41.2/47.6	60/68	66/74	60/70	52/60	60/60	43/43	60/60	48/48	60/60	70/70
	DD30CP	21.6/28.8	60.0/69.3	83/95	90/102	90/100	75/87	80/90	43/43	60/60	48/48	60/60	70/70
102ACG	DD40CP	29.7/39.6	82.4/95.2	111/127	118/134	125/150	103/119	110/125	43/43	60/60	48/48	60/60	70/70
	NONE	—/—	—/—	46/46	51/51	70/70	—	—	46/46	70/70	51/51	70/70	70/70
	DD10CP	7.4/9.9	20.6/23.8	46/46	51/51	70/70	26/30	30/30	46/46	70/70	51/51	70/70	70/70
	DD15CP	10.8/14.4	30.0/34.6	49/55	56/62	70/70	38/44	40/45	46/46	70/70	51/51	70/70	70/70
	DD20CP	14.8/19.8	41.2/47.6	63/71	70/78	70/80	52/60	60/60	46/46	70/70	51/51	70/70	70/70
102ACH	DD30CP	21.6/28.8	60.0/69.3	87/99	94/105	90/100	75/87	80/90	46/46	70/70	51/51	70/70	70/70
	DD40CP	29.7/39.6	82.4/95.2	115/131	122/138	125/150	103/119	110/125	46/46	70/70	51/51	70/70	70/70
	NONE	—/—	—/—	46/46	51/51	70/70	—	—	46/46	70/70	51/51	70/70	70/70
	DD10CP	7.4/9.9	20.6/23.8	46/46	51/51	70/70	26/30	30/30	46/46	70/70	51/51	70/70	70/70
	DD15CP	10.8/14.4	30.0/34.6	49/55	56/62	70/70	38/44	40/45	46/46	70/70	51/51	70/70	70/70
102ACH	DD20CP	14.8/19.8	41.2/47.6	63/71	70/78	70/80	52/60	60/60	46/46	70/70	51/51	70/70	70/70
	DD30CP	21.6/28.8	60.0/69.3	87/99	94/105	90/100	75/87	80/90	46/46	70/70	51/51	70/70	70/70
	DD40CP	29.7/39.6	82.4/95.2	115/131	122/138	125/150	103/119	110/125	46/46	70/70	51/51	70/70	70/70

460 VOLT, THREE PHASE, 60 Hz, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Single Power Supply For Both Unit and Heater Kit							Separate Power Supply For Both Unit and Heater Kit						
Unit Model No. RACDYB	Heater Kit			Air Conditioner				Heater Kit		Air Conditioner			
	Model No. RXJJ-	Rated kW Heater kW @ 460V	FLA	Unit Min. Ckt. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Bkr. Size	Max. Fuse or Ckt. Bkr. Size With Optional Powered Exhaust	Heater Kit Min. Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust
102ADF	NONE	—	—	21	23	30	35	—	—	21	23	30	35
	DD10DNV	9.9	11.9	21	23	30	35	15	15	21	23	30	35
	DD15DNV	14.4	17.3	26	29	30	35	22	25	21	23	30	35
	DD20DNV	19.8	23.8	34	37	35	40	30	30	21	23	30	35
	DD30DNV	28.8	34.6	47	51	50	60	44	45	21	23	30	35
102ADG	DD40DNV	39.6	47.6	64	67	70	70	60	60	21	23	30	35
	NONE	—	—	22	25	30	35	—	—	22	25	30	35
	DD10DNV	9.9	11.9	22	25	30	35	15	15	22	25	30	35
	DD15DNV	14.4	17.3	28	31	30	35	22	25	22	25	30	35
	DD20DNV	19.8	23.8	36	39	40	40	30	30	22	25	30	35
102ADH	DD30DNV	28.8	34.6	49	53	50	60	44	45	22	25	30	35
	DD40DNV	39.6	47.6	66	69	70	70	60	60	22	25	30	35
	NONE	—	—	22	25	30	35	—	—	22	25	30	35
	DD10DNV	9.9	11.9	22	25	30	35	15	15	22	25	30	35
	DD15DNV	14.4	17.3	28	31	30	35	22	25	22	25	30	35
102ADH	DD20DNV	19.8	23.8	36	39	40	40	30	30	22	25	30	35
	DD30DNV	28.8	34.6	49	53	50	60	44	45	22	25	30	35
	DD40DNV	39.6	47.6	66	69	70	70	60	60	22	25	30	35
	NONE	—	—	22	25	30	35	—	—	22	25	30	35
	DD10DNV	9.9	11.9	22	25	30	35	15	15	22	25	30	35
102ADH	DD15DNV	14.4	17.3	28	31	30	35	22	25	22	25	30	35
	DD20DNV	19.8	23.8	36	39	40	40	30	30	22	25	30	35
	DD30DNV	28.8	34.6	49	53	50	60	44	45	22	25	30	35
	DD40DNV	39.6	47.6	66	69	70	70	60	60	22	25	30	35
	NONE	—	—	22	25	30	35	—	—	22	25	30	35

575 VOLT, THREE PHASE, 60 Hz, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Separate Power Supply For Both Unit and Heater Kit													
Single Power Supply For Both Unit and Heater Kit													
Unit Model No. RACDYB	Heater Kit			Air Conditioner			Heater Kit		Air Conditioner				
	Model No. RXJJ-	Rated Heater kW @ 575V	FLA	Unit Min. Ckt. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Bkr. Size	Heater Kit Min.Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity	Air Cond. Min. Ckt.Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust	
102AYF	NONE	—	—	16	18	20	—	—	16	18	20	25	
	DD10Y	10.0	9.6	16	18	20	13	15	16	18	20	25	
	DD15Y	15.0	14.4	22	24	25	19	20	16	18	20	25	
	DD20Y	20.0	19.3	28	30	30	25	25	16	18	20	25	
	DD30Y	30.0	28.9	40	42	40	37	40	16	18	20	25	
	DD40Y	40.0	38.5	52	54	60	49	50	16	18	20	25	
102AYG	NONE	—	—	17	19	25	—	—	17	19	25	25	
	DD10Y	10.0	9.6	17	20	25	13	15	17	19	25	25	
	DD15Y	15.0	14.4	23	26	25	19	20	17	19	25	25	
	DD20Y	20.0	19.3	29	32	30	25	25	17	19	25	25	
	DD30Y	30.0	28.9	41	44	45	37	40	17	19	25	25	
	DD40Y	40.0	38.5	53	56	60	49	50	17	19	25	25	
102AYH	NONE	—	—	17	19	25	—	—	17	19	25	25	
	DD10Y	10.0	9.6	17	20	25	13	15	17	19	25	25	
	DD15Y	15.0	14.4	23	26	25	19	20	17	19	25	25	
	DD20Y	20.0	19.3	29	32	30	25	25	17	19	25	25	
	DD30Y	30.0	28.9	41	44	45	37	40	17	19	25	25	
	DD40Y	40.0	38.5	53	56	60	49	50	17	19	25	25	

208/230 VOLT, THREE PHASE, 60 HZ, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Single Power Supply For Both Unit and Heater Kit							Separate Power Supply For Both Unit and Heater Kit						
Unit Model No. RACDYB	Heater Kit			Air Conditioner				Heater Kit		Air Conditioner			
	Model No. RXJJ-	Rated Heater kW @ 208/230V	FLA	Unit Min. Ckt. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Size	Max. Fuse or Ckt. Bkr. Size With Optional Powered Exhaust	Heater Kit Min.Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust	
120ACF	NONE	—/—	—/—	45/45	50/50	70/70	70/70	—	—	45/45	70/70	70/70	
	DD10CP	7.4/9.9	20.6/23.8	45/45	50/50	70/70	70/70	26/30	30/30	45/45	70/70	70/70	
	DD15CP	10.8/14.4	30.0/34.6	46/51	52/58	70/70	70/70	38/44	40/45	45/45	70/70	70/70	
	DD20CP	14.8/19.8	41.2/47.6	60/68	66/74	70/70	70/80	52/60	60/60	45/45	70/70	70/70	
	DD30CP	21.6/28.8	60.0/69.3	83/95	90/102	90/100	90/110	75/87	80/90	45/45	70/70	70/70	
	DD40CP	29.7/39.6	82.4/95.2	111/127	118/134	125/150	125/150	103/119	110/125	45/45	70/70	70/70	
120ACG	NONE	—/—	—/—	48/48	53/53	70/70	70/70	—	—	48/48	70/70	70/70	
	DD10CP	7.4/9.9	20.6/23.8	48/48	53/53	70/70	70/70	26/30	30/30	48/48	70/70	70/70	
	DD15CP	10.8/14.4	30.0/34.6	49/55	56/62	70/70	70/70	38/44	40/45	48/48	70/70	70/70	
	DD20CP	14.8/19.8	41.2/47.6	63/71	70/78	70/80	70/80	52/60	60/60	48/48	70/70	70/70	
	DD30CP	21.6/28.8	60.0/69.3	87/99	94/105	90/100	100/110	75/87	80/90	48/48	70/70	70/70	
	DD40CP	29.7/39.6	82.4/95.2	115/131	122/138	125/150	125/150	103/119	110/125	48/48	70/70	70/70	
120ACH	NONE	—/—	—/—	48/48	53/53	70/70	70/70	—	—	48/48	70/70	70/70	
	DD10CP	7.4/9.9	20.6/23.8	48/48	53/53	70/70	70/70	26/30	30/30	48/48	70/70	70/70	
	DD15CP	10.8/14.4	30.0/34.6	49/55	56/62	70/70	70/70	38/44	40/45	48/48	70/70	70/70	
	DD20CP	14.8/19.8	41.2/47.6	63/71	70/78	70/80	70/80	52/60	60/60	48/48	70/70	70/70	
	DD30CP	21.6/28.8	60.0/69.3	87/99	94/105	90/100	100/110	75/87	80/90	48/48	70/70	70/70	
	DD40CP	29.7/39.6	82.4/95.2	115/131	122/138	125/150	125/150	103/119	110/125	48/48	70/70	70/70	

460 VOLT, THREE PHASE, 60 Hz, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Single Power Supply For Both Unit and Heater Kit						Separate Power Supply For Both Unit and Heater Kit						
Unit Model No. RACDYB	Heater Kit			Air Conditioner			Heater Kit		Air Conditioner			
	Model No. RXJJ-	Rated kW @ 460V	FLA	Unit Min. Ckt. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Bkr. Size	Heater Kit Min. Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust
120ADF	NONE	—	—	24	26	35	—	—	24	35	26	35
	DD10DNV	9.9	11.9	24	26	35	15	15	24	35	26	35
	DD15DNV	14.4	17.3	26	29	35	22	25	24	35	26	35
	DD20DNV	19.8	23.8	34	37	35	30	30	24	35	26	35
	DD30DNV	28.8	34.6	47	51	50	44	45	24	35	26	35
	DD40DNV	39.6	47.6	64	67	70	60	60	24	35	26	35
120ADG	NONE	—	—	25	28	35	—	—	25	35	28	40
	DD10DNV	9.9	11.9	25	28	35	15	15	25	35	28	40
	DD15DNV	14.4	17.3	28	31	35	22	25	25	35	28	40
	DD20DNV	19.8	23.8	36	39	40	30	30	25	35	28	40
	DD30DNV	28.8	34.6	49	53	50	44	45	25	35	28	40
	DD40DNV	39.6	47.6	66	69	70	60	60	25	35	28	40
120ADH	NONE	—	—	25	28	35	—	—	25	35	28	40
	DD10DNV	9.9	11.9	25	28	35	15	15	25	35	28	40
	DD15DNV	14.4	17.3	28	31	35	22	25	25	35	28	40
	DD20DNV	19.8	23.8	36	39	40	30	30	25	35	28	40
	DD30DNV	28.8	34.6	49	53	50	44	45	25	35	28	40
	DD40DNV	39.6	47.6	66	69	70	60	60	25	35	28	40

575 VOLT, THREE PHASE, 60 Hz, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION													
Single Power Supply For Both Unit and Heater Kit							Separate Power Supply For Both Unit and Heater Kit						
Unit Model No. RACDYB	Heater Kit			Air Conditioner				Heater Kit		Air Conditioner			
	Model No. RXJJ-	Rated kW Heater kW @ 575V	FLA	Unit Min. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Bkr. Size	Max. Fuse or Ckt. Bkr. Size With Optional Powered Exhaust	Heater Kit Min. Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust
120AYF	NONE	—	—	19	21	30	30	—	—	19	21	30	30
	DD10Y	10.0	9.6	19	21	30	30	13	15	19	21	30	30
	DD15Y	15.0	14.4	22	24	30	30	19	20	19	21	30	30
	DD20Y	20.0	19.3	28	30	30	30	25	25	19	21	30	30
	DD30Y	30.0	28.9	40	42	40	45	37	40	19	21	30	30
120AYG	DD40Y	40.0	38.5	52	54	60	60	49	50	19	21	30	30
	NONE	—	—	20	22	30	30	—	—	20	22	30	30
	DD10Y	10.0	9.6	20	22	30	30	13	15	20	22	30	30
	DD15Y	15.0	14.4	23	26	30	30	19	20	20	22	30	30
	DD20Y	20.0	19.3	29	32	30	35	25	25	20	22	30	30
120AYH	DD30Y	30.0	28.9	41	44	45	45	37	40	20	22	30	30
	DD40Y	40.0	38.5	53	56	60	60	49	50	20	22	30	30
	NONE	—	—	20	22	30	30	—	—	20	22	30	30
	DD10Y	10.0	9.6	20	22	30	30	13	15	20	22	30	30
	DD15Y	15.0	14.4	23	26	30	30	19	20	20	22	30	30
120AYI	DD20Y	20.0	19.3	29	32	30	35	25	25	20	22	30	30
	DD30Y	30.0	28.9	41	44	45	45	37	40	20	22	30	30
	DD40Y	40.0	38.5	53	56	60	60	49	50	20	22	30	30
	NONE	—	—	20	22	30	30	—	—	20	22	30	30
	DD10Y	10.0	9.6	20	22	30	30	13	15	20	22	30	30
120AYJ	DD15Y	15.0	14.4	23	26	30	30	19	20	20	22	30	30
	DD20Y	20.0	19.3	29	32	30	35	25	25	20	22	30	30
	DD30Y	30.0	28.9	41	44	45	45	37	40	20	22	30	30
	DD40Y	40.0	38.5	53	56	60	60	49	50	20	22	30	30
	NONE	—	—	20	22	30	30	—	—	20	22	30	30


208/230 VOLT, THREE PHASE, 60 Hz, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Single Power Supply For Both Unit and Heater Kit						Separate Power Supply For Both Unit and Heater Kit						
Unit Model No. RACDYB	Heater Kit			Air Conditioner			Heater Kit		Air Conditioner			
	Model No. RXJJ-	Rated Heater kW @ 208/230V	FLA	Unit Min. Ckt. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Bkr. Size	Heater Kit Min. Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust
150ACF	NONE	—/—	—/—	68/68	74/74	90/90	—	—	68/68	90/90	74/74	90/90
	DD10CP	7.4/9.9	20.6/23.8	68/68	74/74	90/90	26/30	30/30	68/68	90/90	74/74	90/90
	DD15CP	10.8/14.4	30.0/34.6	68/68	74/74	90/90	38/44	40/45	68/68	90/90	74/74	90/90
	DD20CP	14.8/19.8	41.2/47.6	68/71	74/78	90/90	52/60	60/60	68/68	90/90	74/74	90/90
	DD30CP	21.6/28.8	60.0/69.3	87/99	94/105	90/100	75/87	80/90	68/68	90/90	74/74	90/90
150ACG	DD40CP	29.7/39.6	82.4/95.2	115/131	122/138	125/150	103/119	110/125	68/68	90/90	74/74	90/90
	NONE	—/—	—/—	75/75	80/80	90/90	—	—	75/75	90/90	80/80	100/100
	DD10CP	7.4/9.9	20.6/23.8	75/75	80/80	90/90	26/30	30/30	75/75	90/90	80/80	100/100
	DD15CP	10.8/14.4	30.0/34.6	75/75	80/80	90/90	38/44	40/45	75/75	90/90	80/80	100/100
	DD20CP	14.8/19.8	41.2/47.6	75/80	80/86	90/90	52/60	60/60	75/75	90/90	80/80	100/100
	DD30CP	21.6/28.8	60.0/69.3	95/107	102/113	100/110	75/87	80/90	75/75	90/90	80/80	100/100
	DD40CP	29.7/39.6	82.4/95.2	123/139	130/146	125/150	103/119	110/125	75/75	90/90	80/80	100/100

460 VOLT, THREE PHASE, 60 Hz, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Single Power Supply For Both Unit and Heater Kit						Separate Power Supply For Both Unit and Heater Kit						
Unit Model No. RACDYB	Heater Kit			Air Conditioner			Heater Kit		Air Conditioner			
	Model No. RXJJ-	Rated Heater kW @ 460V	FLA	Unit Min. Ckt. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Bkr. Size	Heater Kit Min. Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Fuse or Ckt. Bkr. Size	Air Cond. Min. Ckt. Ampacity with Optional Powered Exhaust	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust
150ADF	NONE	—	—	29	32	35	—	—	29	35	32	40
	DD10DNV	9.9	11.9	29	32	35	15	15	29	35	32	40
	DD15DNV	14.4	17.3	29	32	35	22	25	29	35	32	40
	DD20DNV	19.8	23.8	36	39	40	30	30	29	35	32	40
	DD30DNV	28.8	34.6	49	53	50	44	45	29	35	32	40
150ADG	DD40DNV	39.6	47.6	66	69	70	60	60	29	35	32	40
	NONE	—	—	31	34	35	—	—	31	35	34	40
	DD10DNV	9.9	11.9	31	34	35	15	15	31	35	34	40
	DD15DNV	14.4	17.3	31	34	35	22	25	31	35	34	40
	DD20DNV	19.8	23.8	38	41	40	30	30	31	35	34	40
	DD30DNV	28.8	34.6	52	55	60	44	45	31	35	34	40
	DD40DNV	39.6	47.6	68	71	70	60	60	31	35	34	40

575 VOLT, THREE PHASE, 60 Hz, AUXILIARY ELECTRIC HEATER KITS CHARACTERISTICS AND APPLICATION												
Separate Power Supply For Both Unit and Heater Kit												
Single Power Supply For Both Unit and Heater Kit												
Unit Model No. RACDYB	Heater Kit			Air Conditioner			Heater Kit		Air Conditioner			
	Model No. RXJJ-	Rated Heater kW @ 575V	FLA	Unit Min. Ckt. Ampacity	Unit Min. Ckt. Ampacity with Optional Powered Exhaust	Max. Fuse or Ckt. Bkr. Size	Max. Fuse or Ckt. Bkr. Size With Optional Powered Exhaust	Heater Kit Min.Ckt. Ampacity	Heater Kit Max Fuse or Ckt. Bkr. Ampacity	Air Cond. Min. Ckt. Ampacity	Air Cond. Max Fuse or Ckt. Bkt. Size	Air Cond. Max Ckt. Ampacity with Optional Powered Exhaust
150AYF	NONE	—	—	23	25	25	30	—	—	23	25	30
	DD10Y	10.0	9.6	23	25	25	30	13	15	23	25	30
	DD15Y	15.0	14.4	23	26	25	30	19	20	23	25	30
	DD20Y	20.0	19.3	29	32	30	35	25	25	23	25	30
	DD30Y	30.0	28.9	41	44	45	45	37	40	23	25	30
DD40Y	40.0	38.5	53	56	60	60	49	50	23	25	30	
150AYG	NONE	—	—	24	26	30	30	—	—	24	30	30
	DD10Y	10.0	9.6	24	26	30	30	13	15	24	30	30
	DD15Y	15.0	14.4	25	28	30	30	19	20	24	30	30
	DD20Y	20.0	19.3	31	34	35	35	25	25	24	30	30
	DD30Y	30.0	28.9	43	46	45	50	37	40	24	30	30
DD40Y	40.0	38.5	55	58	60	60	49	50	24	30	30	

A2L REFRIGERANT INSTALLATION SAFETY DATA

MODEL		RACDYB090	RACDYB102	RACDYB120	RACDYB150	RACDYB090 w/HumidiDry	RACDYB102 w/HumidiDry	RACDYB120 w/HumidiDry	RACDYB150 w/HumidiDry
Refrigerant Charge		88.0	113.6	171.2	168.0	120.0	152.0	210.4	214.4
Minimum circulation		293	378	569	559	399	506	700	713
Altitude above Sea Level (ft)	Altitude Adjustment Factor	Minimum Total Space Area, T _{Amin} (Sq. Ft.)							
0	1.000	162	209	316	310	221	280	388	395
1000	1.025	166	215	323	317	227	287	398	405
2000	1.051	170	220	332	325	232	294	408	415
3000	1.078	175	226	340	334	238	302	418	426
4000	1.107	180	232	349	343	245	310	429	437
5000	1.138	185	238	359	352	252	319	441	450
6000	1.170	190	245	369	362	259	328	454	462
6500	1.187	193	249	375	368	263	333	460	469

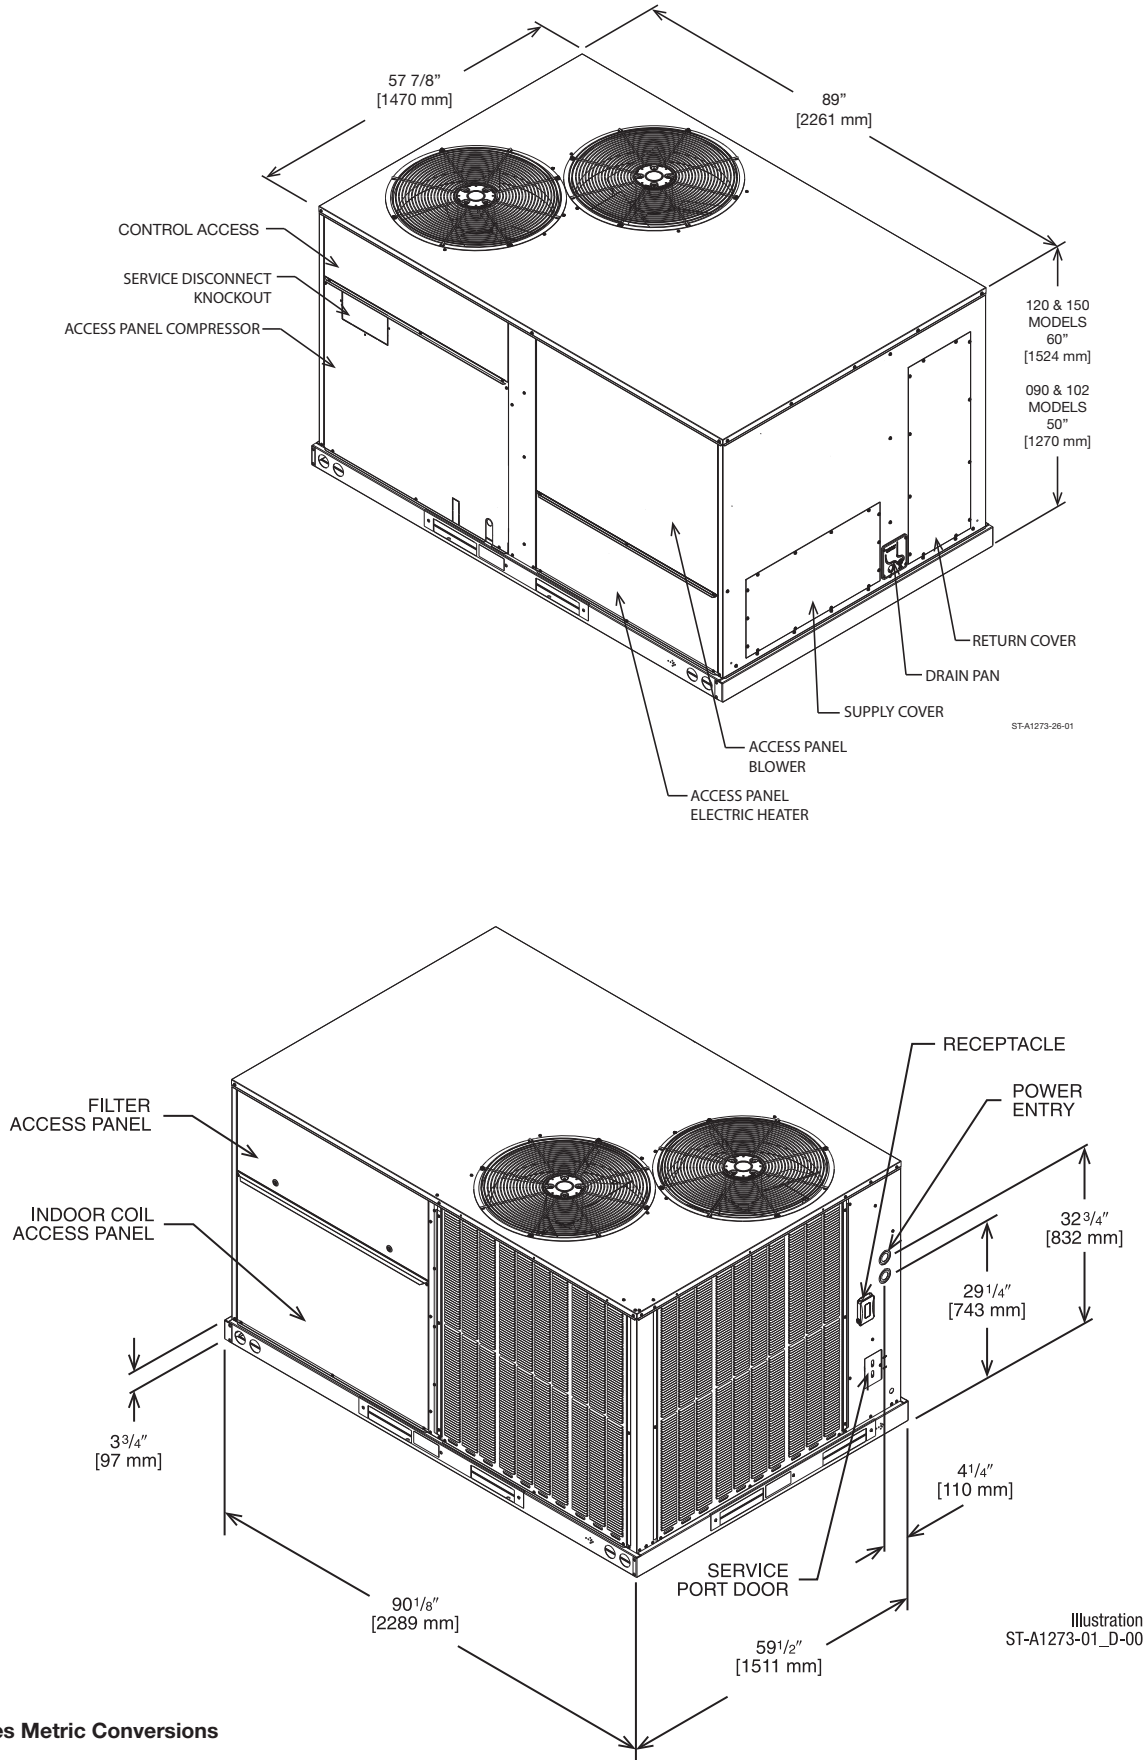

[] Designates Metric Conversions

SUPPLY AND RETURN DIMENSIONS FOR HORIZONTAL APPLICATIONS

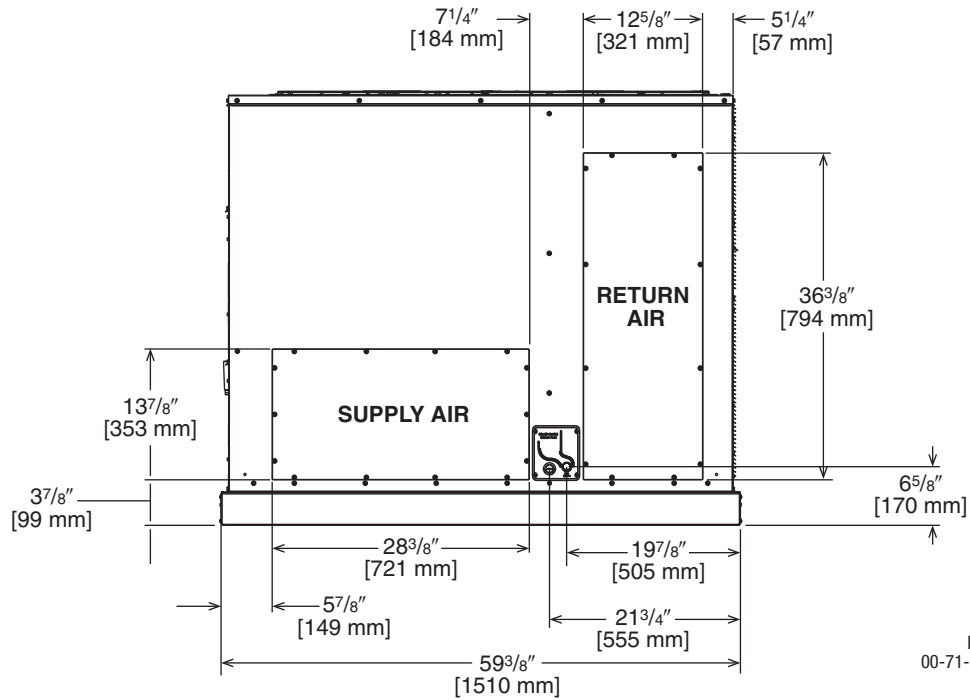


Illustration
00-71-3721A-TS

SUPPLY AND RETURN DIMENSIONS FOR DOWNFLOW APPLICATIONS (VIEW FROM BOTTOM UP)

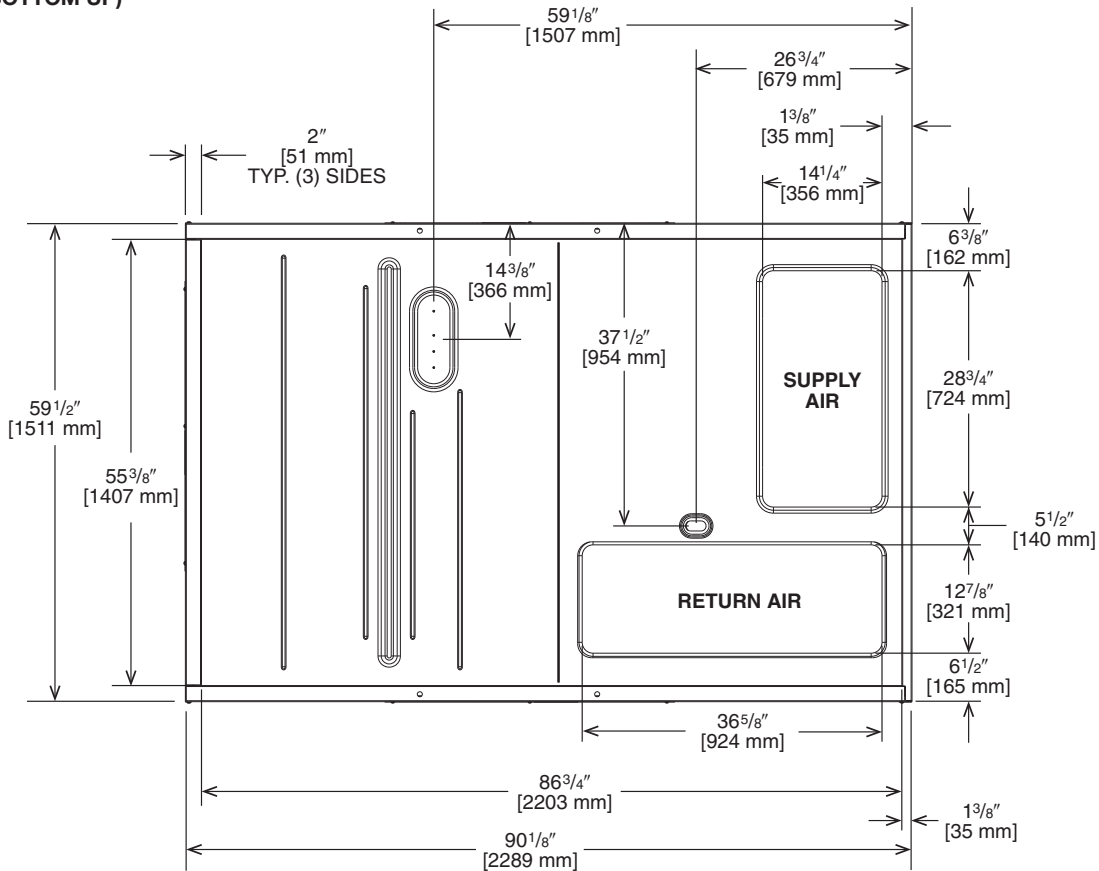


Illustration
ST-A1273-01_A

[] Designates Metric Conversions

WEIGHTS

Capacity Tons [kW]	Corner Weights by Percentage			
	A	B	C	D
7.5-12.5 [21.1-44.0]	26%	34%	17%	23%

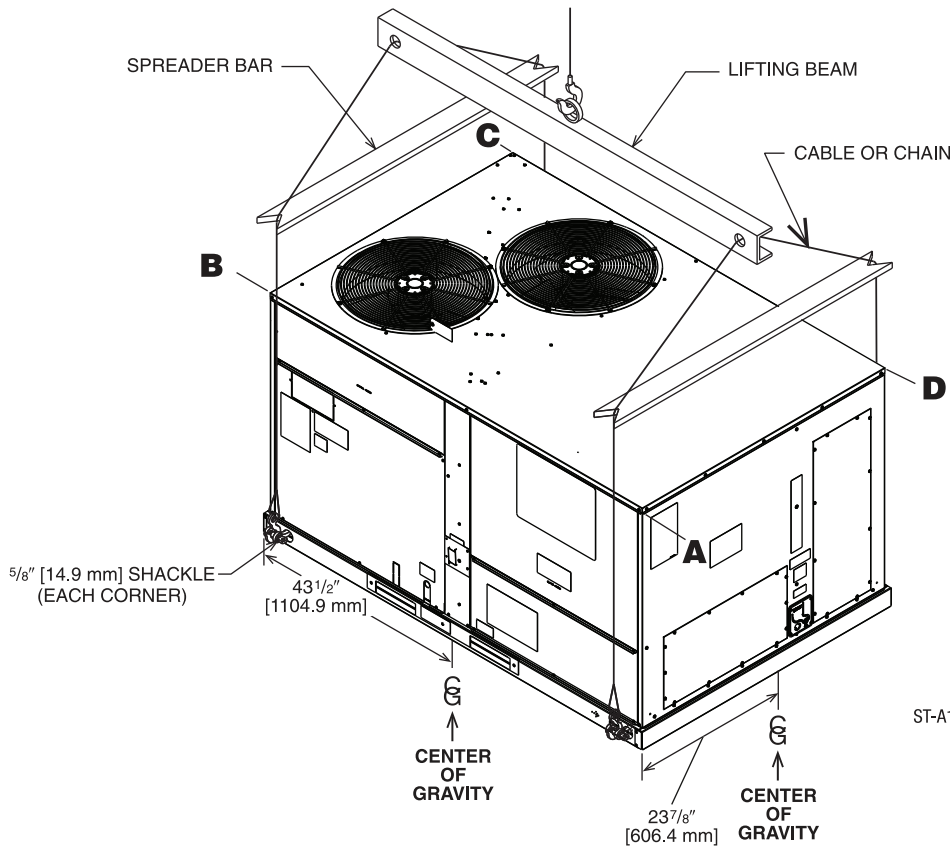


Illustration
ST-A1273-01_J-00

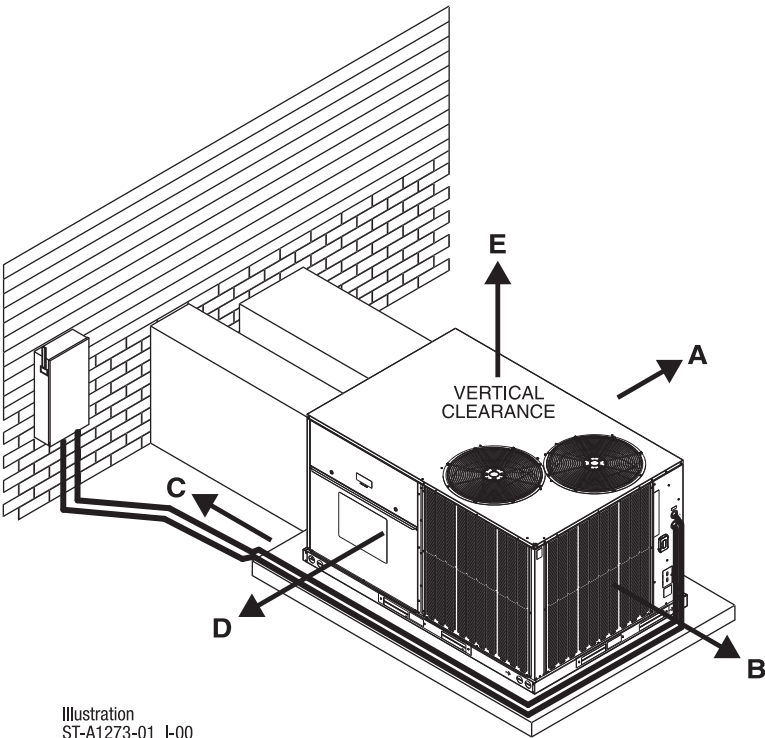


Illustration
ST-A1273-01_I-00

CLEARANCES

The following minimum clearances must be observed for proper unit performance and serviceability.

RECOMMENDED CLEARANCE In. [mm]	LOCATION
48 [1219]	A - FRONT
24 [609]	B - CONDENSER END
48 [1219] ①	C - DUCT END
24 [609] ②	D - FILTER SIDE
60 [1524]	E - ABOVE

- ① 18" [457 mm] MINIMUM IF DRAINPAN WILL NOT BE REMOVED.
② 48" [1219 mm] MINIMUM IF ECONOMIZER IS INSTALLED.

FIELD INSTALLED ACCESSORY EQUIPMENT

Accessory	Model Number	Shipping Weight Lbs. [kg]	Installed Weight Lbs. [kg]	Factory Installation Available?
Economizers				
DDC Economizer with Single Enthalpy (Downflow) <i>MicroMetl Economizer with Honeywell Controller</i>	RXRD-01MDDBM3	86 [39.0]	57 [25.9]	Yes
DDC Economizer with Single Enthalpy (Horizontal) <i>MicroMetl Economizer with Honeywell Controller</i>	RXRD-01MDHBM3	84 [38.1]	55 [24.9]	No
Non-DDC Economizer with No Controls (Downflow) <i>MicroMetl Economizer, Belimo Actuator</i>	RXRD-31MDDAM3	86 [39.0]	57 [25.9]	No
Non-DDC Economizer with Single Enthalpy (Downflow) <i>MicroMetl Economizer with Siemens Controls</i>	RXRD-11MDDAM3	86 [39.0]	57 [25.9]	Yes
Non-DDC Economizer with Single Enthalpy (Downflow) <i>Ruskin Rooftop Systems Economizer with RRS Basic Controller</i>	RXRD-41MDDAM3	86 [39.0]	57 [25.9]	Yes
Non-DDC Economizer with Single Enthalpy (Downflow) <i>Ruskin Rooftop Systems Economizer with Siemens Controller</i>	RXRD-51MDDAM3	86 [39.0]	57 [25.9]	Yes
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>MicroMetl Economizer with Siemens Controls</i>	RXRD-11MDHAM3	84 [38.1]	55 [24.9]	No
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>Ruskin Rooftop Systems Economizer with RRS Basic Controller</i>	RXRD-41MDHAM3	84 [38.1]	55 [24.9]	No
Non-DDC Economizer with Single Enthalpy (Horizontal) <i>Ruskin Rooftop Systems Economizer with Siemens Controller</i>	RXRD-51MDHAM3	84 [38.1]	55 [24.9]	No
Economizer Universal DDC Interface Kit	RXRX-DDC01	40 [18.1]	34 [15.4]	Yes

Accessory	Model Number	Shipping Weight Lbs. [kg]	Installed Weight Lbs. [kg]	Factory Installation Available?
Comfort Alert ¹ (3 Phase) DDC	RXRX-AZ01	3 [1.5]	2 [0.9]	Yes
Comfort Alert ¹ (3 Phase) Non-DDC	RXRX-AZ02	3 [1.5]	2 [0.9]	Yes
Communication Card, BACnet	RXRX-AY01	1 [0.5]	1 [0.5]	No
Communication Card, LonWorks	RXRX-AY02	1 [0.5]	1 [0.5]	No
Concentric Adapter 7.5/8.5 Ton Drop	RXMC-DD01	40 [18.1]	34 [15.4]	No
Concentric Adapter 10 Ton Drop	RXMC-DD02	75 [34.0]	65 [29.5]	No
Concentric Adapter 12.5 Ton Drop	RXMC-DD03	75 [34.0]	65 [29.5]	No
Concentric Diffuser 7.5/8.5 Ton Drop	RXRN-AED2000	35 [15.9]	30 [13.6]	No
Concentric Diffuser 10.0 Ton Drop	RXRN-AED3415	170 [77.1]	160 [72.6]	No
Concentric Diffuser 12.5 Ton Drop	RXRN-AED3618	190 [86.2]	180 [81.6]	No
Concentric Diffuser 7.5/8.5 Ton Flush	RXRN-AEF2000	30 [13.6]	25 [11.3]	No
Concentric Diffuser 10.0 Ton Flush	RXRN-AEF3415	140 [113.4]	130 [59.0]	No
Concentric Diffuser 12.5 Ton Flush	RXRN-AEF3618	180 [81.6]	170 [77.1]	No
Convenience Outlet, Unwired	RXRX-BN01	2 [1.0]	1.5 [0.7]	Yes
Dual Enthalpy Kit (for Honeywell Jade™)	RXRX-BV01	1 [0.5]	1 [0.5]	No
Dual Enthalpy Kit DDC (for Honeywell DDC)	RXRX-BV02	1 [0.5]	1 [0.5]	No
Dual Enthalpy, Temperature and Humidity Sensor (for Ruskin Basic Controller)	PD955977	1 [0.5]	1 [0.5]	No
Dual Enthalpy, Temperature and Humidity Sensor (for Siemens)	PD555460	1 [0.5]	1 [0.5]	No

¹One (1) Comfort Alert required per compressor

²Compatible with roofcurbs RXKG-CAE14 or RXKG-CAE24

[] Designates Metric Conversions

FIELD INSTALLED ACCESSORY EQUIPMENT (CONTINUED)

Accessory	Model Number	Shipping Weight Lbs. kg]	Installed Weight Lbs. kg]	Factory Installation Available?
Electric Heater Kits	RXJJ-DD10CP	30. [13.6]	27.5 [12.5]	Yes
	RXJJ-DD15CP	32 [14.5]	29.5 [13.4]	Yes
	RXJJ-DD20CP	34 [15.4]	31.5 [14.3]	Yes
	RXJJ-DD30CP	37 [16.8]	34.5 [15.6]	Yes
	RXJJ-DD40CP	40 [18.1]	37.5 [17.0]	Yes
	RXJJ-DD10DNV	30 [13.6]	27.5 [12.5]	Yes
	RXJJ-DD15DNV	32 [14.5]	29.5 [13.4]	Yes
	RXJJ-DD20DNV	34 [15.4]	31.5 [14.3]	Yes
	RXJJ-DD30DNV	37 [16.8]	34.5 [15.6]	Yes
	RXJJ-DD40DNV	40 [18.1]	37.5 [17.0]	Yes
	RXJJ-DD10Y	30 [13.6]	27.5 [12.5]	No
	RXJJ-DD15Y	32 [14.5]	29.5 [13.4]	No
	RXJJ-DD20Y	34 [15.4]	31.5 [14.3]	No
	RXJJ-DD30Y	37 [16.8]	34.5 [15.6]	No
	RXJJ-DD40Y	40 [18.1]	37.5 [17.0]	No
Freeze Stat Kit	RXR-AM01	2 [1.0]	1.5 [0.7]	Yes
Fresh Air Damper, Manual	RXRF-ADA1	15 [6.8]	12 [5.4]	No
Fresh Air Damper, Motorized	RXRF-ADB1	38 [17.2]	31 [14.06]	No
Fresh Air Damper, Motorized (DDC)	RXRF-ADC1	38 [17.2]	31 [14.06]	No
Low-Ambient Control Kit	RXRZ-A04	4 [1.8]	3 [1.4]	Yes
MERV 8 Filter 7.5 & 8.5 Ton	RXMF-M08A22020	2 [0.9]	1 [0.45]	No
MERV 8 Filter 10 & 12.5 Ton	RXMF-M08A22520	2 [0.9]	1 [0.45]	No
MERV 13 Filter 7.5 & 8.5 Ton	RXMF-M13A22020	2 [0.9]	1 [0.45]	No
MERV 13 Filter 10 & 12.5 Ton	RXMF-M13A22520	2 [0.9]	1 [0.45]	No
Outdoor Coil Louver Kit - 7.5 & 8.5 Ton	RXR-ADD04A	52 [23.6]	47 [21.3]	Yes
Outdoor Coil Louver Kit - 10 & 12.5 Ton	RXR-ADD04B	43 [19.5]	39 [17.7]	Yes
Power Exhaust (230V) Kit, Convertible (MicroMetl)	RXR-CDF01C	104 [47.2]	94 [42.6]	No
Power Exhaust (460V) Kit, Convertible (MicroMetl)	RXR-CDF01D	104 [47.2]	94 [42.6]	No
Power Exhaust (230V) Kit for Downflow Economizer (RRS)	RXR-RDF01C	104 [47.2]	94 [42.6]	No
Power Exhaust (460V) Kit for Downflow Economizer (RRS)	RXR-RDF01D	104 [47.2]	94 [42.6]	No
Power Exhaust (575V) Kit for Downflow Economizer (RRS)	RXR-RDF01Y	104 [47.2]	94 [42.6]	No
Power Exhaust (230V) Kit for Horizontal Economizer (RRS)	RXR-RDF03C	104 [47.2]	94 [42.6]	No
Power Exhaust (460V) Kit for Horizontal Economizer (RRS)	RXR-RDF03D	104 [47.2]	94 [42.6]	No
Power Exhaust (575V) Kit for Horizontal Economizer (RRS)	RXR-RDF03Y	104 [47.2]	94 [42.6]	No
Roofcurb Adapter ²	RXR-DDCAE	235 [106.6]	215 [97.5]	No
Roofcurb, 14"	RXKG-DDD14	109 [49.4]	104 [47.2]	No
Roofcurb, 14" Welded	RXKG-SD14	109 [49.4]	105 [47.6]	No
Roofcurb, 24"	RXKG-DDD24	145 [65.8]	140 [63.5]	No
Roofcurb, 24" Welded	RXKG-SD24	145 [65.8]	142 [64.4]	No
Sensor, Carbon Dioxide (Wall Mount)	RXR-AR02	3 [1.4]	2 [1.0]	No
Sensor, Room Humidity	RHC-ZNS4	1 [0.5]	1 [0.5]	No
Sensor, Room Temperature and Relative Humidity	RHC-ZNS5	1 [0.5]	1 [0.5]	No
Single Point Wiring Kit	RXJX-AC0605	23 [10.4]	25 [11.3]	No
	RXJX-AC0805	24 [10.9]	26 [11.8]	No
	RXJX-AD0605	25 [11.3]	27 [12.2]	No
	RXJX-AC0909	26 [11.8]	28 [12.7]	No
	RXJX-AD0609	25 [11.3]	27 [12.2]	No
Smoke Detector Kit, Return	RXR-BS03	5 [2.7]	3.5 [1.6]	No
Smoke Detector Kit, Return/Supply	RXR-BS04	7 [3.2]	5 [2.7]	No
Unfused Service Disconnect	RXR-BP01	10 [4.5]	9 [4.1]	Yes


¹One (1) Comfort Alert required per compressor

²Compatible with roofcurbs RXKG-CAE14 or RXKG-CAE24

[] Designates Metric Conversions

SINGLE POINT WIRING KIT

RXJX-A C 09 09

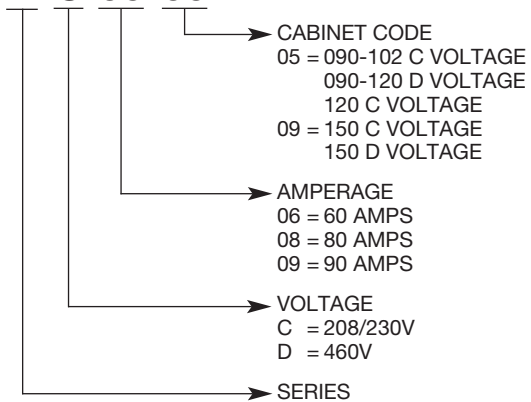

COMMUNICATION CARDS

Field Installed



BACnet COMMUNICATION CARD RXRX-AY01


The field installed BACnet Communication Card allows the RTU-C unit controller to communicate with a third party building management system that supports the BACnet Application Specific Controller device profile. The BACnet Communication Module plugs onto the unit RTU-C controller and allows communication between the RTU-C and the BACnet MSTP network.



LonWorks COMMUNICATION CARD RXRX-AY02

The field installed LonWorks Communication Card allows the RTU-C unit controller to communicate with a third party building management system that supports the LonMark Space Comfort Controller (SCC) functional profile or LonMark Discharge Air Controller (DAC) functional profile. The LonMark Communication Module plugs onto the RTU-C controller and allows communication between the RTU-C and a LonWorks Network.


CONCENTRIC DIFFUSER APPLICATION

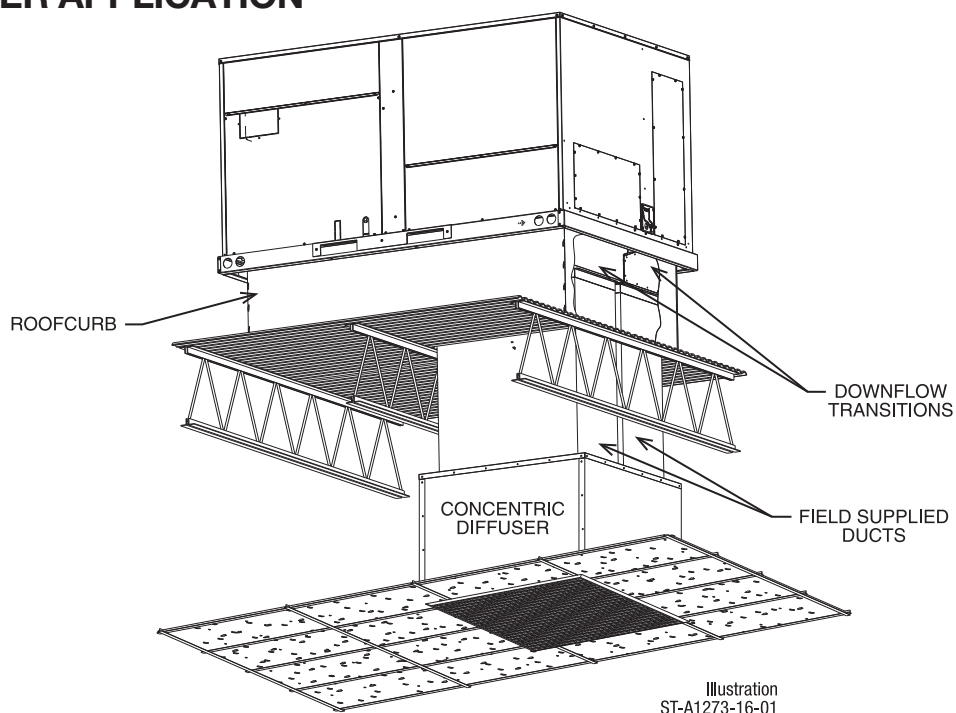

DOWNFLOW TRANSITION DRAWINGS

RXMC-DD01 — Concentric Adapter 7.5/8.5 Ton Drop

- Used with RXRN-AEF2000 or RXRN-AED2000 Concentric Diffusers

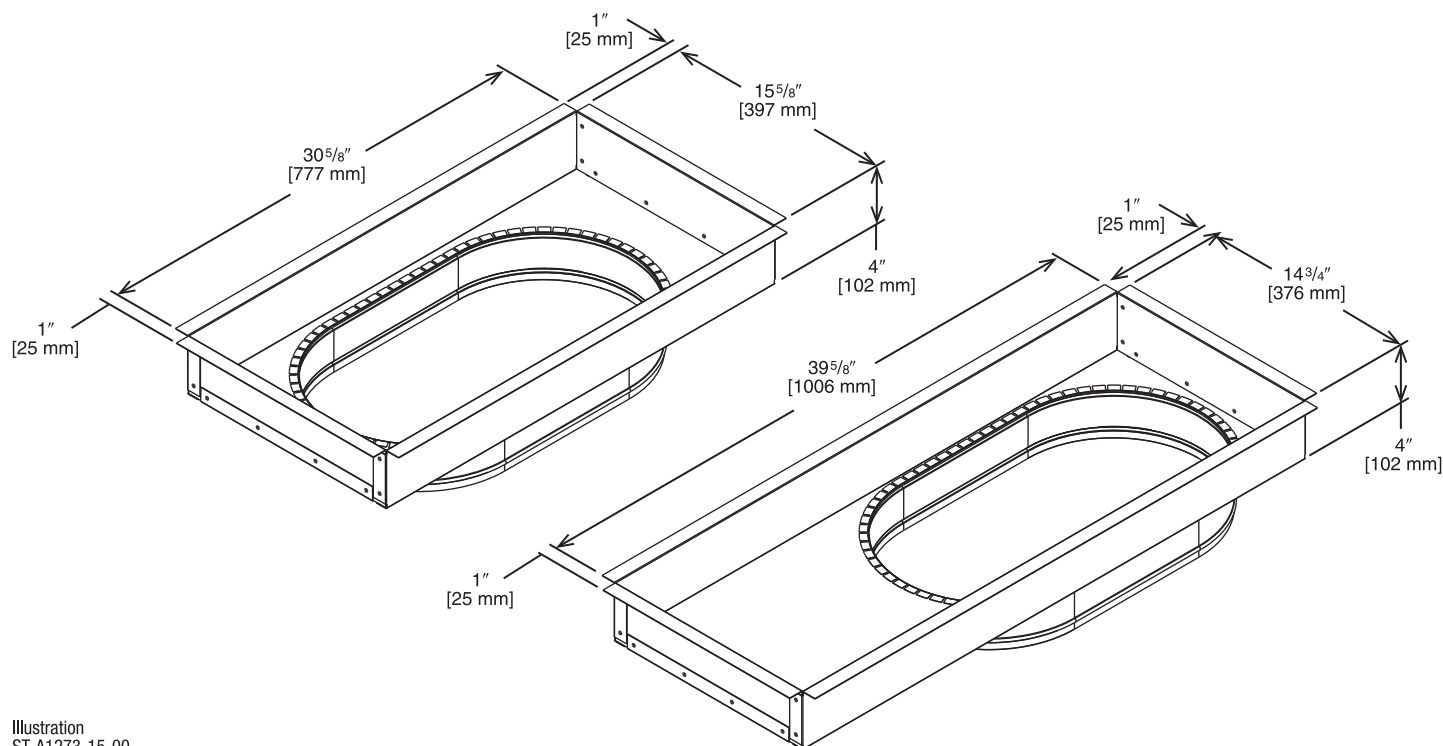

[] Designates Metric Conversions

DOWNFLOW TRANSITION DRAWINGS

RXMC-DD02—Concentric Adapter 10 Ton Drop

- Used with RXRN-AEF3415
or RXRN-AED3415
Concentric Diffusers




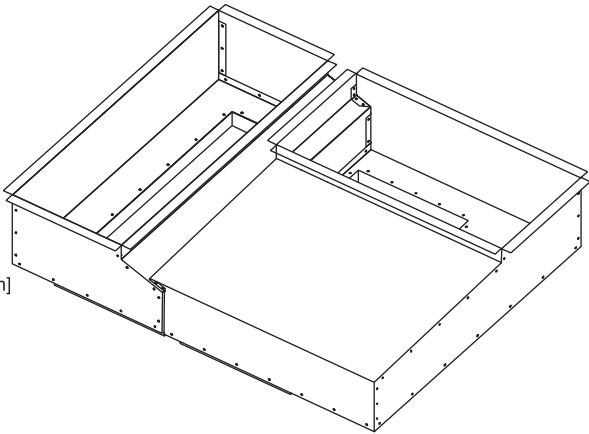


Illustration
ADS-106193-02

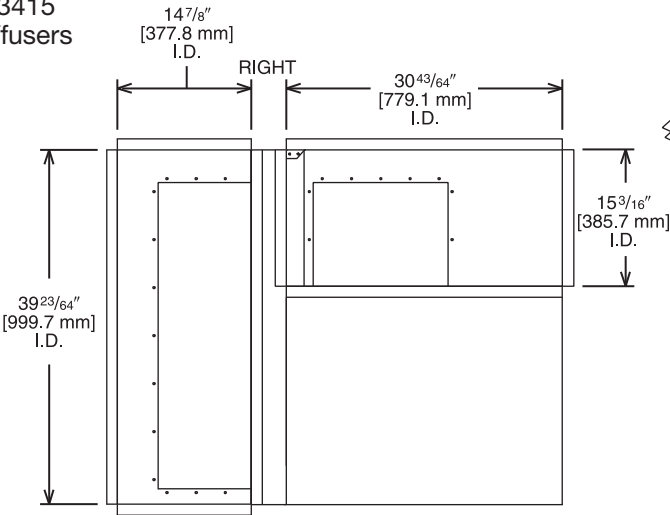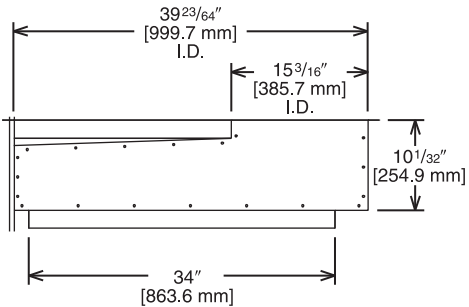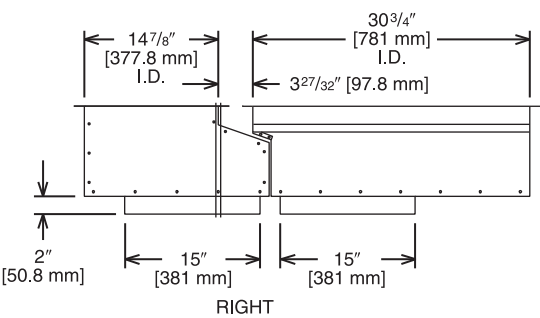

[] Designates Metric Conversions

DOWNFLOW TRANSITION DRAWINGS (CONTINUED)

RXMC-DD03—Concentric Adapter 12.5 Ton Drop

- Used with RXRN-AEF3618 or RXRN-AED3618 Concentric Diffusers




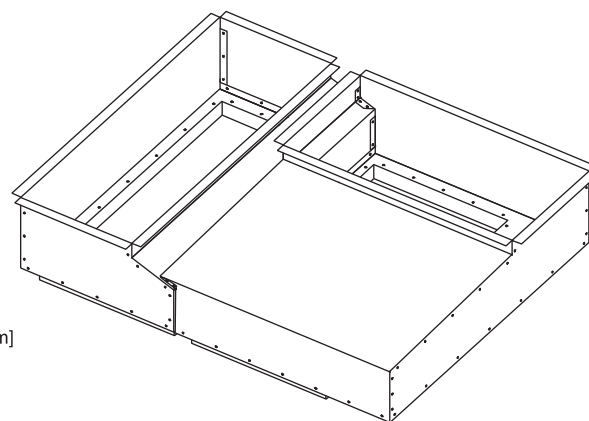


Illustration
ADS-106193-03

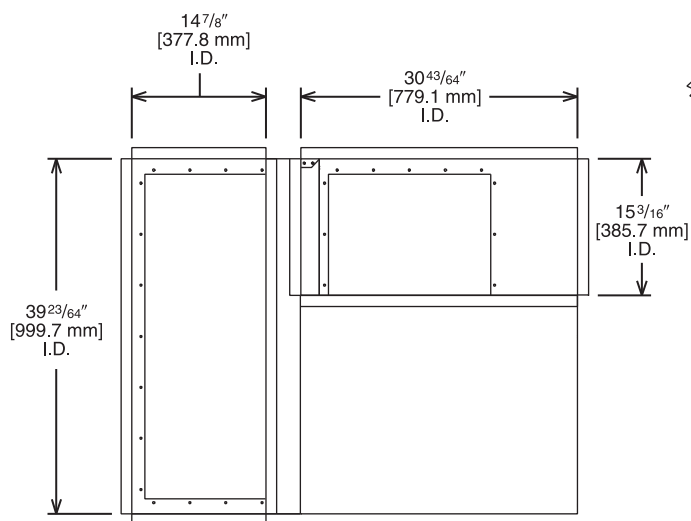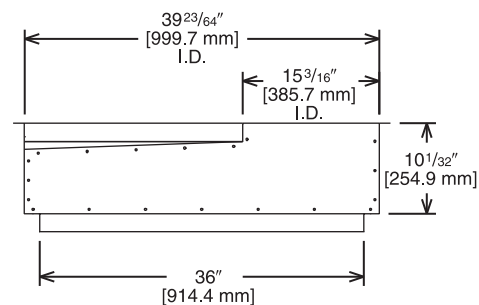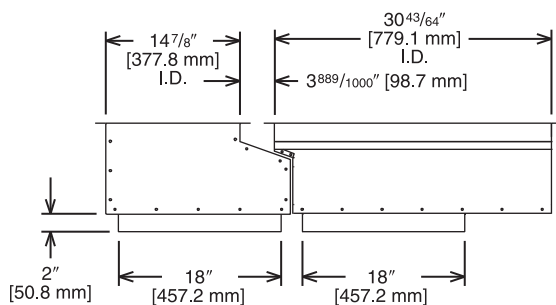


[] Designates Metric Conversions

CONCENTRIC DIFFUSER 7.5/8.5 TON DROP

RXRN-AED2000

For Use With Concentric Adapter (RXMC-DD01)
and 20" [508 mm] Round Supply and Return Ducts

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

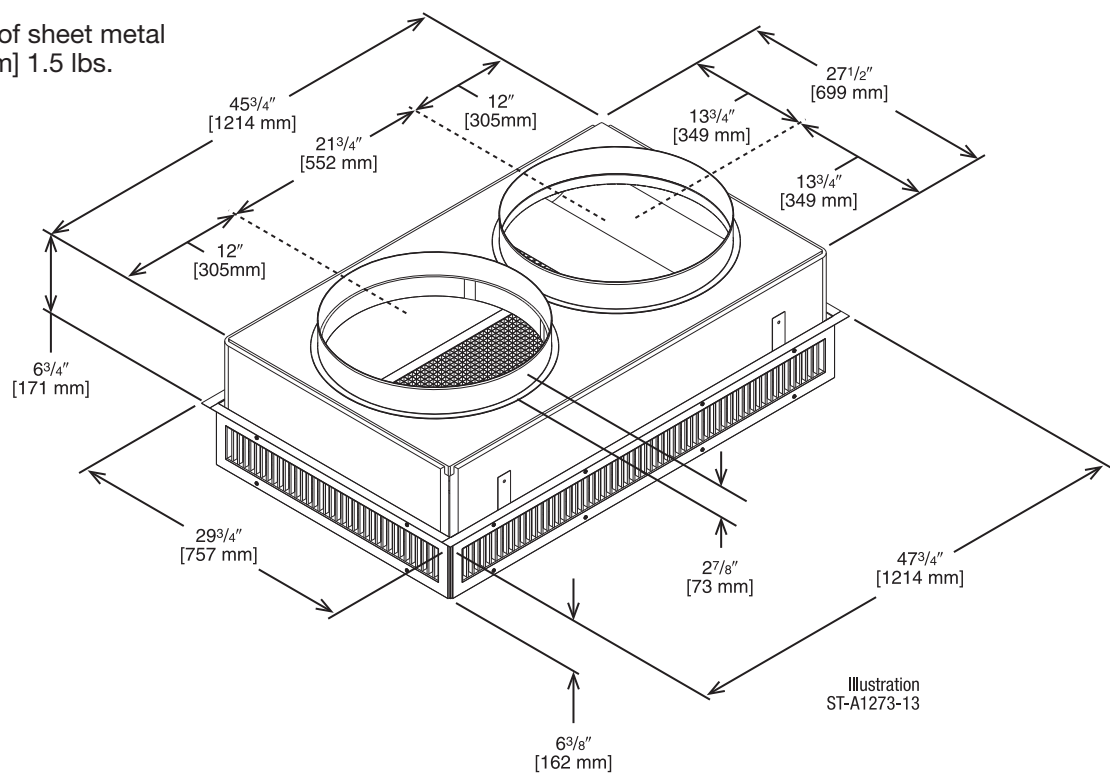

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ^② ^③ Feet [m]	Neck Velocity fpm [m/s]	Noise Level ^④ (dbA)
RXRN-AED2000	2600 [1222]	22-39 [6.7-11.9]	669.0 [3.4]	32
	2800 [1316]	23-40 [7.1-12.2]	720.0 [3.7]	38
	3000 [1410]	25-42 [7.6-12.8]	772.0 [3.9]	40
	3200 [1504]	26-43 [7.9-13.1]	823.0 [4.2]	41
	3400 [1598]	27-45 [8.2-13.7]	874.0 [4.4]	42
	3600 [1692]	30-50 [9.1-15.2]	925.5 [4.7]	45
	3800 [1786]	32-53 [9.8-16.2]	976.8 [4.9]	48
	4000 [1880]	34-56 [10.4-17.1]	1028.1 [5.2]	50

NOTES: ① All data is based on the air diffusion council guidelines.
② Throw data is based on 75 FPM Terminal Velocities using isothermal air.
③ Throw is based on diffuser blades being directed in a straight pattern.
④ Actual noise levels may vary due to duct design and do not include transmitted unit noise.
Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

CONCENTRIC DIFFUSER 10.0 TON DROP 15" x 34" [381 x 836 mm]

RXRN-AED3415

**For Use With Concentric Adapter (RXMC-DD02)
and 15" x 34" [381 x 836 mm] Supply and Return Ducts**

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner
- Double deflection diffuser with the blades secured by spring steel

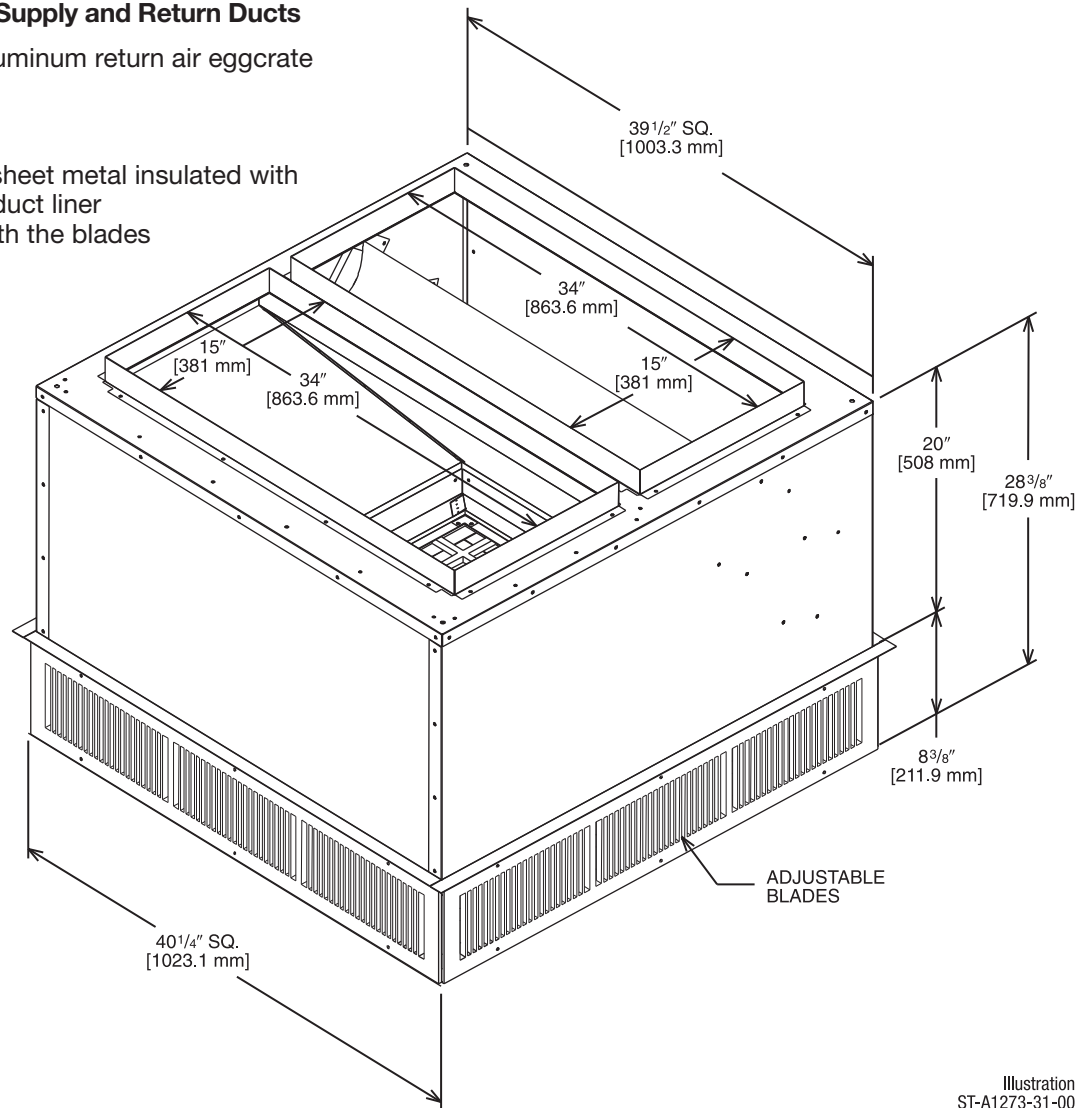


Illustration
ST-A1273-31-00

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ^{② ③} Feet [m]	Neck Velocity fpm [m/s]	Noise Level ^④ (dbA)
RXRN-AED3415	3600 [1692]	26-53 [7.9-16.2]	851.0 [4.3]	27
	3800 [1786]	27-55 [8.2-16.8]	898.0 [4.5]	29
	4000 [1880]	29-58 [8.8-17.7]	946.0 [4.8]	30
	4200 [1974]	31-61 [9.4-18.6]	993.0 [5.1]	32
	4400 [2068]	32-64 [9.8-19.5]	1040.0 [5.3]	33
	4600 [2162]	34-66 [10.4-20.1]	1087.5 [5.5]	35

NOTES: ① All data is based on the air diffusion council guidelines.

② Throw data is based on 75 FPM Terminal Velocities using isothermal air.

③ Throw is based on diffuser blades being directed in a straight pattern.

④ Actual noise levels may vary due to duct design and do not include transmitted unit noise.
Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

CONCENTRIC DIFFUSER 12.5 TON DROP
18" x 36" [457 x 914 mm]

RXRN-AED3618

For Use With Concentric Adapter (RXMC-DD03)
and 18" x 36" [457 x 914 mm]
Supply and Return Ducts

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner
- Double deflection diffuser with the blades secured by spring steel

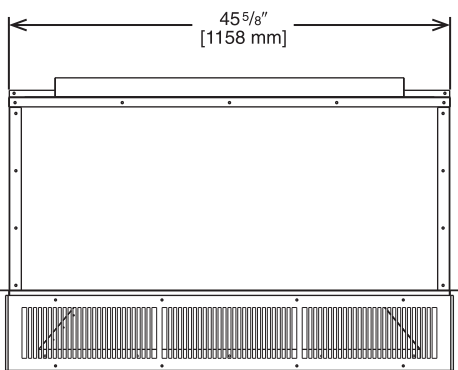
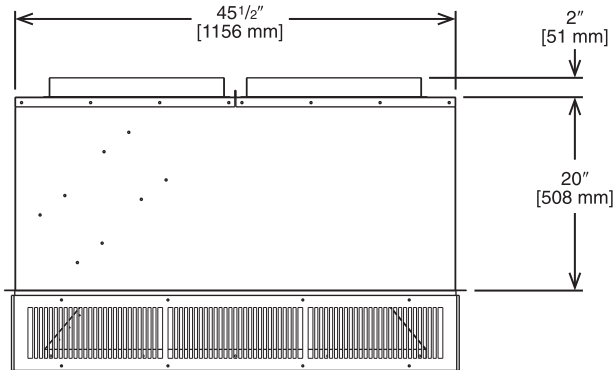
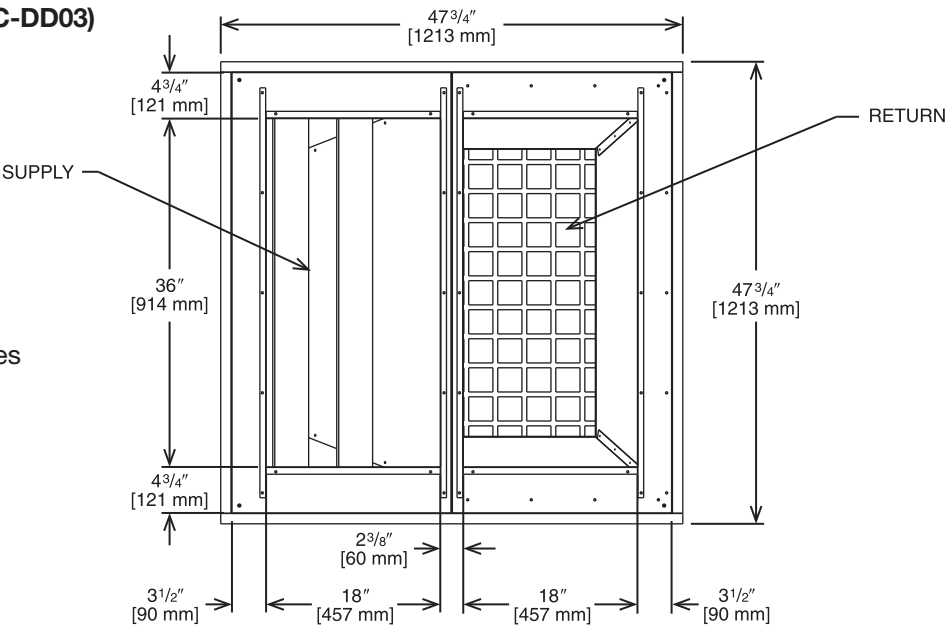


Illustration
ST-A1273-11-00

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ^② ^③ Feet [m]	Neck Velocity fpm [m/s]	Noise Level ^④ (dbA)
RXRN-AED3618	4400 [2068]	29-55 [8.8-16.8]	841 [4.3]	26
	4600 [2162]	31-57 [9.4-17.4]	875 [4.4]	28
	4800 [2256]	32-60 [9.8-18.3]	915 [4.6]	29
	5000 [2350]	33-62 [10.1-18.9]	951 [4.8]	30
	5200 [2444]	34-65 [10.4-19.8]	988 [5.1]	31
	5400 [2538]	36-67 [10.9-20.4]	1025 [5.2]	32

NOTES: ① All data is based on the air diffusion council guidelines.
② Throw data is based on 75 FPM Terminal Velocities using isothermal air.
③ Throw is based on diffuser blades being directed in a straight pattern.
④ Actual noise levels may vary due to duct design and do not include transmitted unit noise.
Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

CONCENTRIC DIFFUSER 7.5/8.5 TON FLUSH

RXRN-AEF2000 (7.5 & 8.5 Ton Models)

For Use With Concentric Adapter (RXMC-DD01)
20" [508 mm] Round Supply and Return Ducts

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

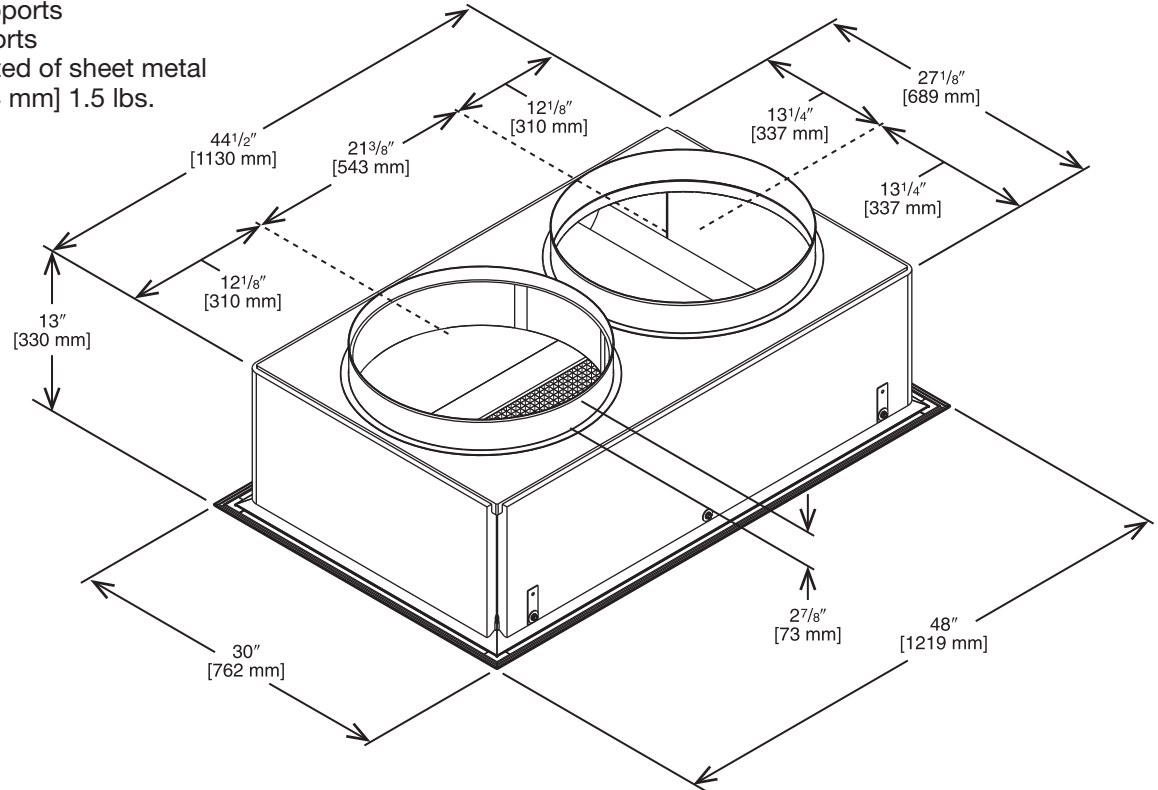


Illustration
ST-A1273-14-00

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ^② ^③ Feet [m]	Neck Velocity fpm [m/s]	Noise Level ^④ (dbA)
RXRN-AEF2000	2600 [1222]	17-24 [5.2-7.3]	663 [3.4]	30
	2800 [1316]	18-28 [5.5-8.5]	714 [3.6]	35
	3000 [1410]	20-30 [6.1-9.1]	765 [3.9]	35
	3200 [1504]	22-33 [6.7-10.1]	816 [4.1]	40
	3400 [1598]	23-37 [7-11.3]	867 [4.4]	40
	3600 [1692]	25-38 [7.6-11.6]	918 [4.7]	43
	3800 [1786]	26-39 [7.9-11.9]	969 [4.9]	45
	4000 [1880]	27-40 [8.2-12.2]	1020 [5.2]	48

NOTES: ① All data is based on the air diffusion council guidelines.

② Throw data is based on 75 FPM Terminal Velocities using isothermal air.

③ Throw is based on diffuser blades being directed in a straight pattern.

④ Actual noise levels may vary due to duct design and do not include transmitted unit noise.
Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

CONCENTRIC DIFFUSER 10.0 TON FLUSH
15" x 34" [381 x 864 mm]

RXRN-AEF3415

For Use With Concentric Adapter (RXMC-DD02)
15" x 34" [381 x 864 mm]

Supply and Return Ducts

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

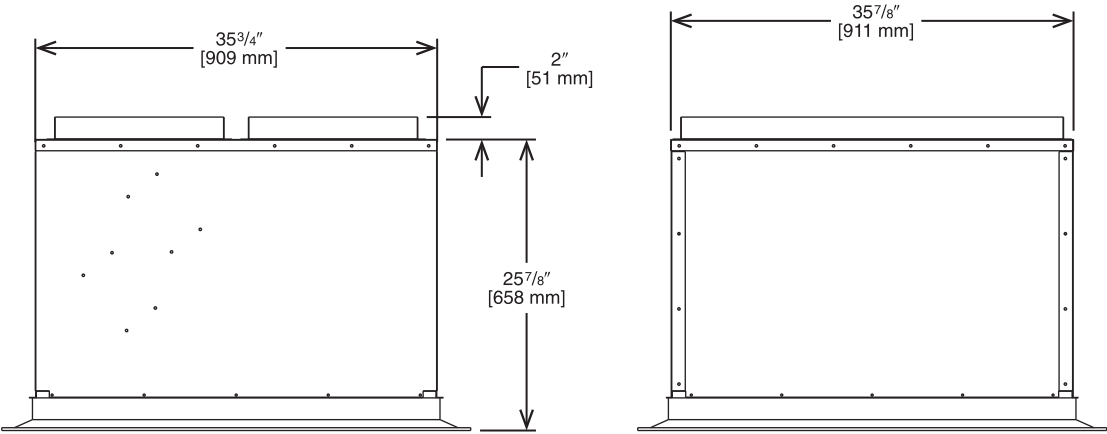
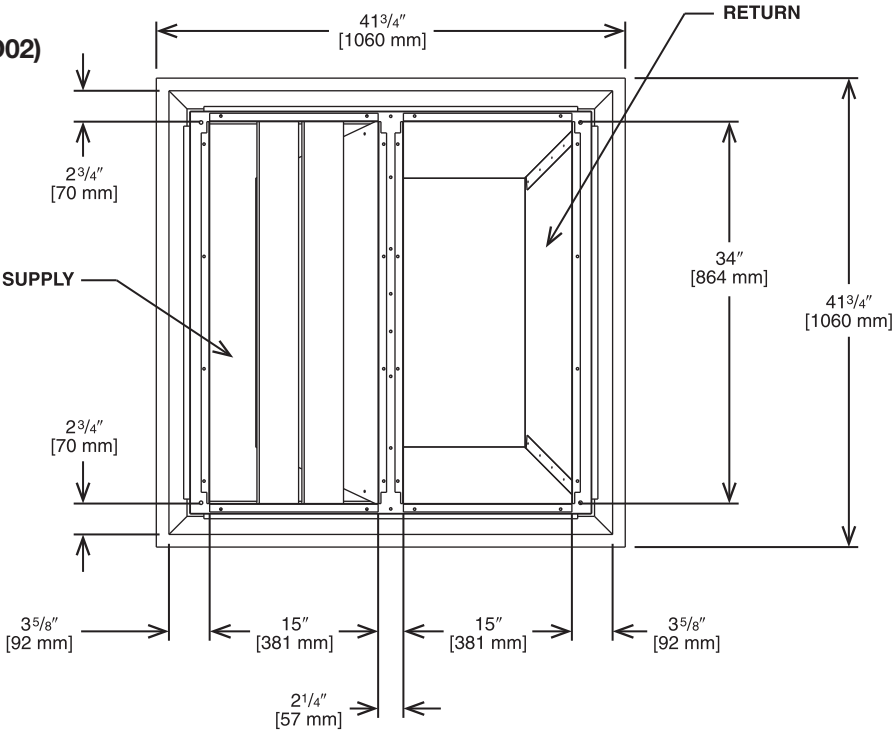


Illustration
ST-A1273-07-00

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ② ③ Feet [m]	Neck Velocity fpm [m/s]	Noise Level ④ (dbA)
RXRN-AEF3415	3600 [1692]	14-34 [4.3-10.4]	844 [4.3]	27
	3800 [1786]	15-36 [4.6-11.1]	891 [4.5]	29
	4000 [1880]	16-37 [4.9-11.3]	938 [4.8]	30
	4200 [1974]	17-39 [5.2-11.9]	985 [5.1]	32
	4400 [2068]	18-41 [5.5-12.5]	1032 [5.2]	33
	4600 [2162]	19-43 [5.8-13.1]	1079 [5.5]	35
	4800 [2256]	20-45 [6.1-13.7]	1126 [5.7]	36

NOTES: ① All data is based on the air diffusion council guidelines.
② Throw data is based on 75 FPM Terminal Velocities using isothermal air.
③ Throw is based on diffuser blades being directed in a straight pattern.
④ Actual noise levels may vary due to duct design and do not include transmitted unit noise.
Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

CONCENTRIC DIFFUSER 12.5 TON FLUSH 18" x 36" [457 x 914 mm]

RXRN-AEF3618

For Use With Concentric Adapter (RXMC-DD03)
and 18" x 36" [457 x 914 mm]
Supply and Return Ducts

- All aluminum diffuser with aluminum return air eggcrate
- Built-in anti-sweat gasket
- Molded fiberglass supports
- Built-in hanging supports
- Diffuser box constructed of sheet metal insulated with 1" [25.4 mm] 1.5 lbs. [.7 kg] duct liner

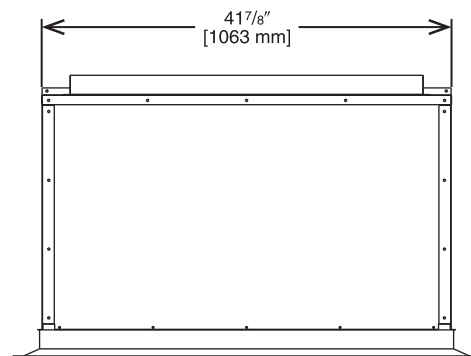
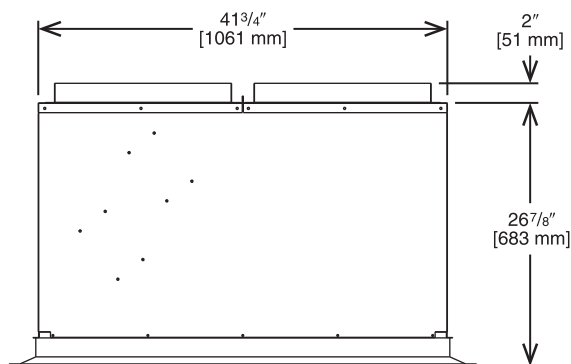
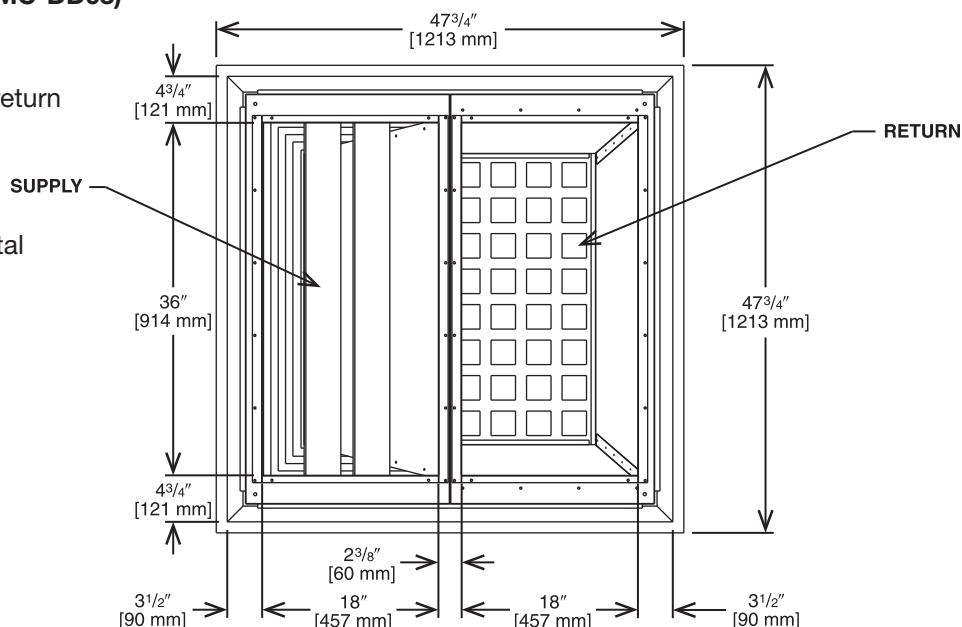


Illustration
ST-A1273-12-00

ENGINEERING DATA^①

Model No.	Flow Rate CFM [L/s]	Throw ^② ^③ Feet [m]	Neck Velocity fpm [m/s]	Noise Level ^④ (dB)
RXRN-AEF3618	4400 [2068]	13-28 [4.1-8.5]	922 [47]	35
	4600 [2162]	14-30 [4.3-9.1]	962 [4.9]	37
	4800 [2256]	15-31 [4.6-9.4]	1002 [5.1]	39
	5000 [2350]	16-32 [4.9-9.8]	1043 [5.3]	40
	5200 [2444]	17-33 [5.2-10.1]	1083 [5.5]	42
	5400 [2538]	18-35 [5.5-10.7]	1123 [5.7]	43

NOTES: ^① All data is based on the air diffusion council guidelines.
^② Throw data is based on 75 FPM Terminal Velocities using isothermal air.
^③ Throw is based on diffuser blades being directed in a straight pattern.
^④ Actual noise levels may vary due to duct design and do not include transmitted unit noise.
Adequate duct attenuation must be provided to reduce sound output from the unit.

[] Designates Metric Conversions

DDC ECONOMIZER WITH SINGLE-ENTHALPY (DOWNFLOW) MICROMETL ECONOMIZER WITH HONEYWELL CONTROLLER



Factory or Field-Installed

RXRD-01MDDBM3

RXRX-BV02—Dual Enthalpy Kit DDC (for Honeywell DDC)

RXRX-AR02—Sensor, Carbon Dioxide (Wall Mount)

- Features **Honeywell** Controls
- Available Factory Installed or Field Accessory
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Ultra Low Leak Dampers meet California Title 24 requirements
- Slip-In Design for Easy Installation
- Standard Barometric Relief Damper
- Single Enthalpy with Dual Enthalpy Upgrade Kit Option
- CO₂ Input Sensor Option
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Downflow Duct Application
- Optional Remote Minimum Position Potentiometer (270 ohm) (Honeywell #S963B1136) is Available from Prostock
- Field Installed Power Exhaust Option
- Prewired for Smoke Detector
- If connected to a Building Automation System (BAS), all economizer functions can be viewed on the (BAS), or 16 x 2 LCD screen
- If connected to thermostat, all economizer functions can be viewed on 16 x 2 LCD screen

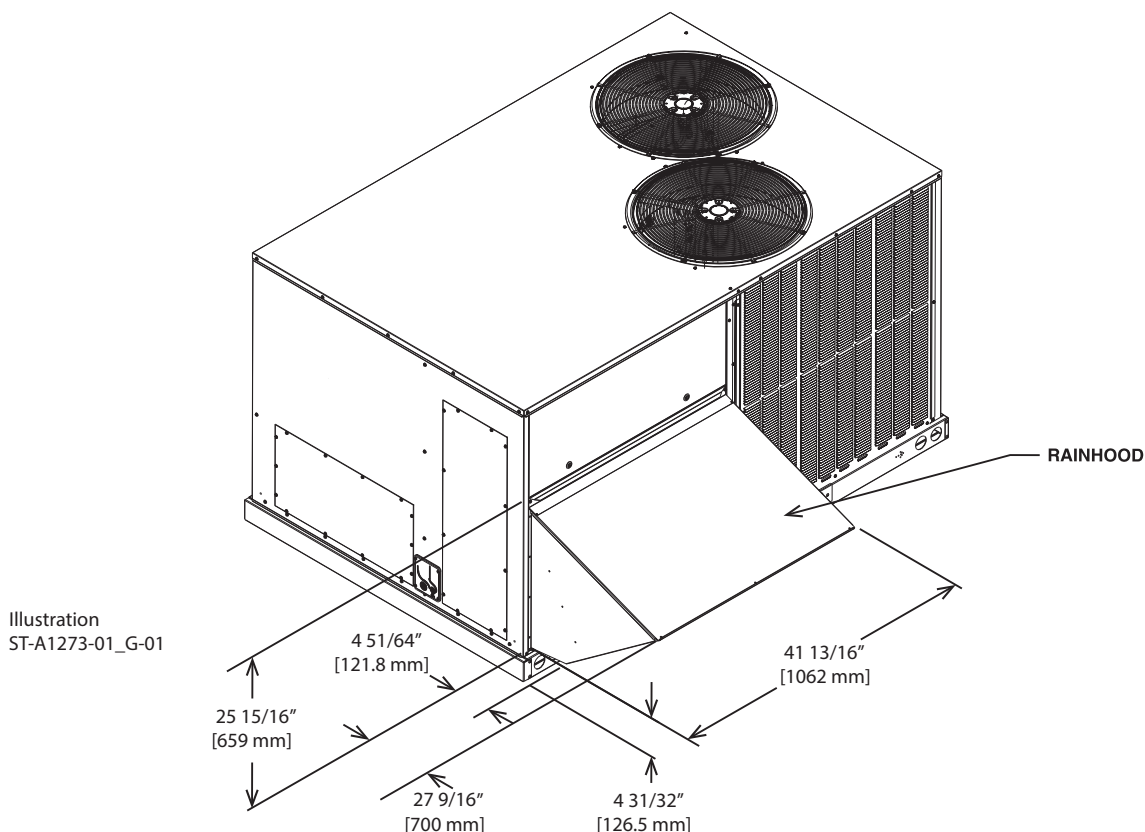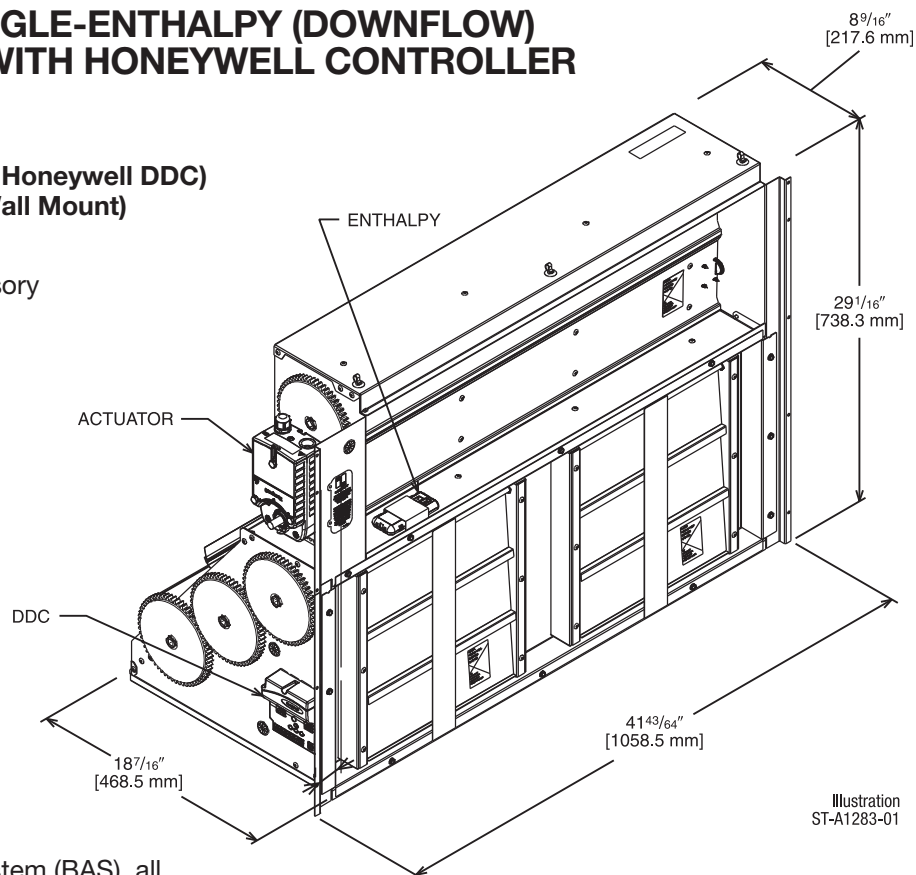

[] Designates Metric Conversions

DDC ECONOMIZER W/SINGLE ENTHALPY (HORIZONTAL) MICROMETL ECONOMIZER WITH HONEYWELL CONTROLLER



Field Installed Only

RXRD-01MDHBM3

RXXR-BV02—Dual Enthalpy Kit DDC (for Honeywell DDC)

RXXR-AR02—Sensor, Carbon Dioxide (Wall Mount)

- Features **Honeywell** Controls
- Available as a Field Installed Accessory Only
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Ultra Low Leak Dampers meet California Title 24 requirements
- Slip-In Design for Easy Installation
- Standard Barometric Relief Damper
- Single Enthalpy with Dual Enthalpy Upgrade Kit Option
- CO₂ Input Sensor Option
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Horizontal Duct Application
- Optional Remote Minimum Position Potentiometer (270 ohm) (Honeywell #S963B1136) is Available from Prostock
- Field Installed Power Exhaust Option
- If connected to a Building Automation System (BAS), all economizer functions can be viewed on the (BAS), or 16 x 2 LCD screen
- If connected to thermostat, all economizer functions can be viewed on 16 x 2 LCD screen

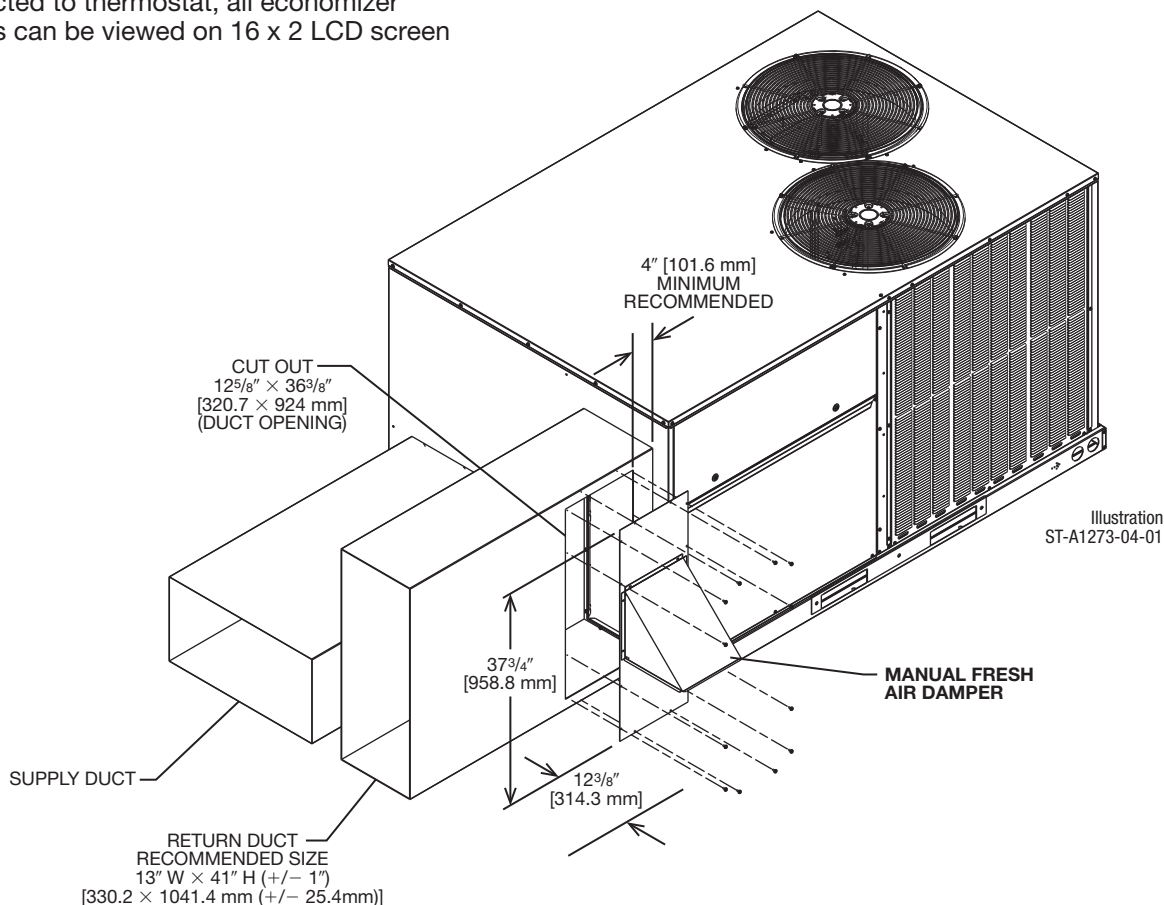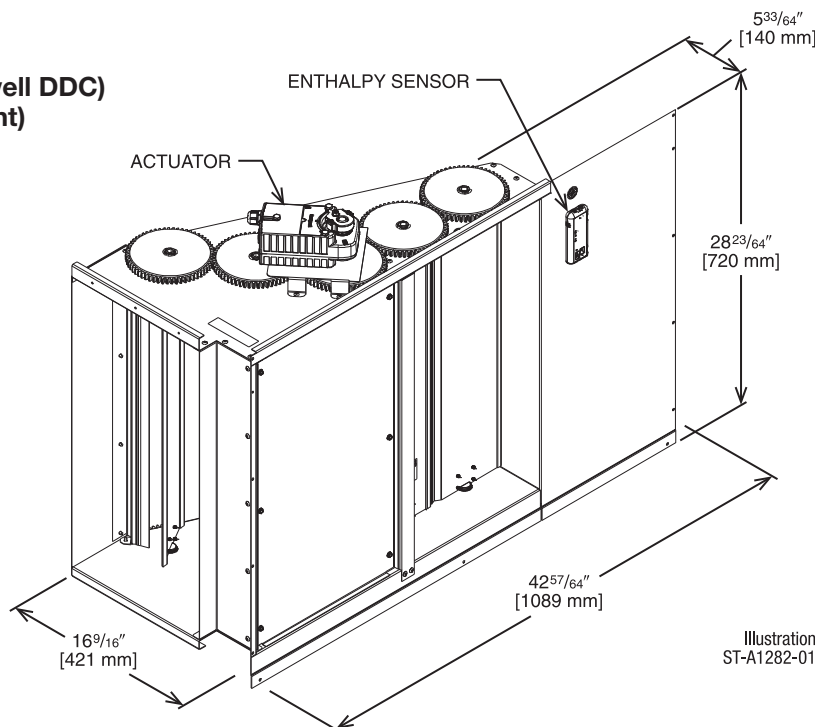

[] Designates Metric Conversions


NON-DDC ECONOMIZER WITH NO CONTROLS (DOWNFLOW) MICROMETL ECONOMIZER, BELIMO ACTUATOR

Field-Installed Only

RXRD-31MDDAM3

RXXRX-ACD01 – Wire Harness for Non-DDC Generic Economizers

- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Ultra Low Leak Dampers meet California Title 24 requirements and ASHRAE 90.1 2022
- AMCA S11 Certified Class 1A Leakage - 1" WG of differential pressure tested to AMCA Standard 500-D
- Slip-In Design for Easy Installation
- Plug-In Polarized 12-pin Electrical Connections
- Standard Barometric Relief Damper
- Controller and Sensors to be determined by Customer
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Downflow Duct Application
- Field Installed Power Exhaust Option

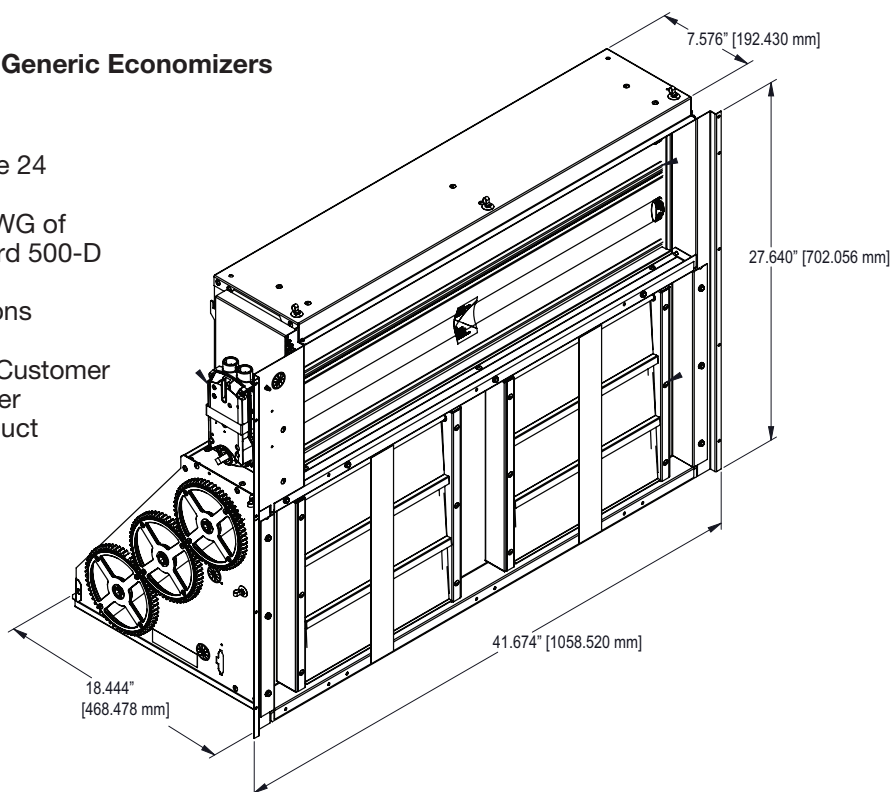

NON DDC ECONOMIZER W/SINGLE ENTHALPY (DOWNFLOW) MICROMETL ECONOMIZER WITH SIEMENS CONTROL

Factory or Field-Installed

RXRD-11MDDAM3

PD555460—Dual Enthalpy, Temperature and Humidity Sensor
(for Siemens Controller)

RXRX-AR02—Sensor, Carbon Dioxide (Wall Mount)

- Features **Siemens** Controls
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Low Leakage Dampers
- Slip-In Design for Easy Installation
- Standard Barometric Relief Damper
- Single Enthalpy with Dual Enthalpy Upgrade Kit Available
- CO₂ Input Sensor Option
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Downflow Duct Application
- Field Installed Power Exhaust Option
- Prewired for Smoke Detector
- If connected to a Building Automation System (BAS), all economizer functions can be viewed on the (BAS) or 16 x 2 LCD screen
- If connected to thermostat, all economizer functions can be viewed on 16 x 2 LCD screen
- Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXRX-DDC-01)


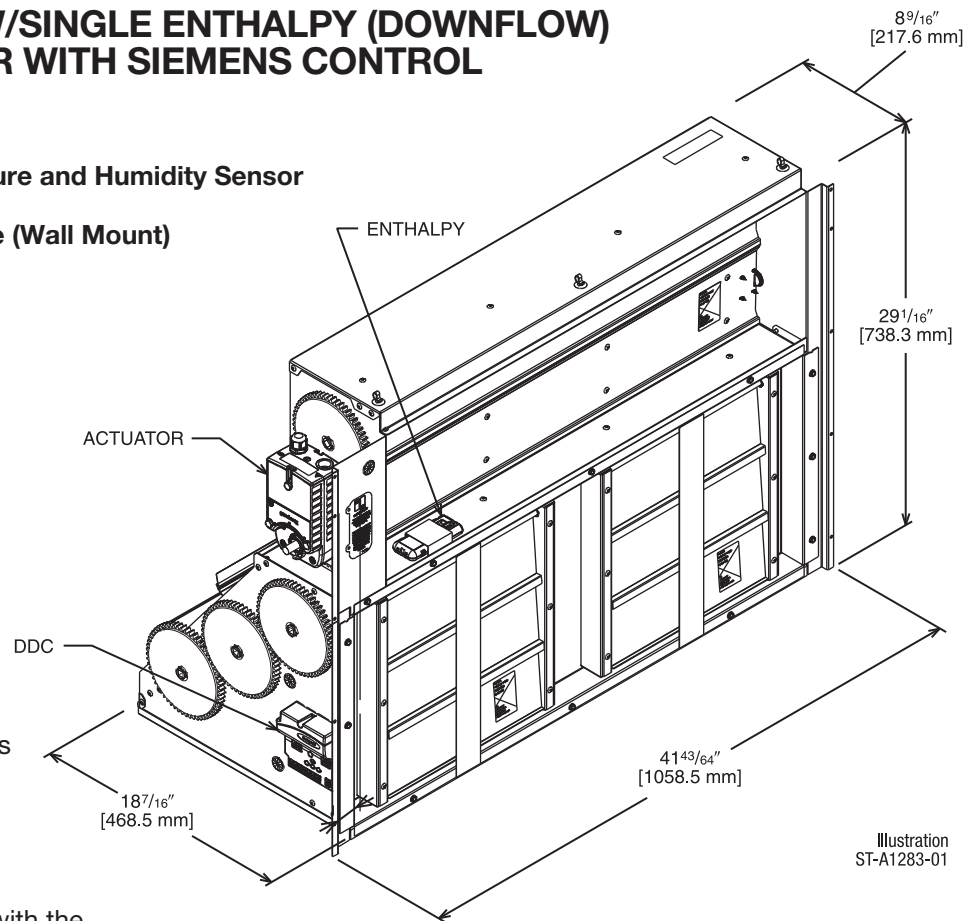


Illustration
ST-A1283-01

Illustration
ST-A1273-01_G-01

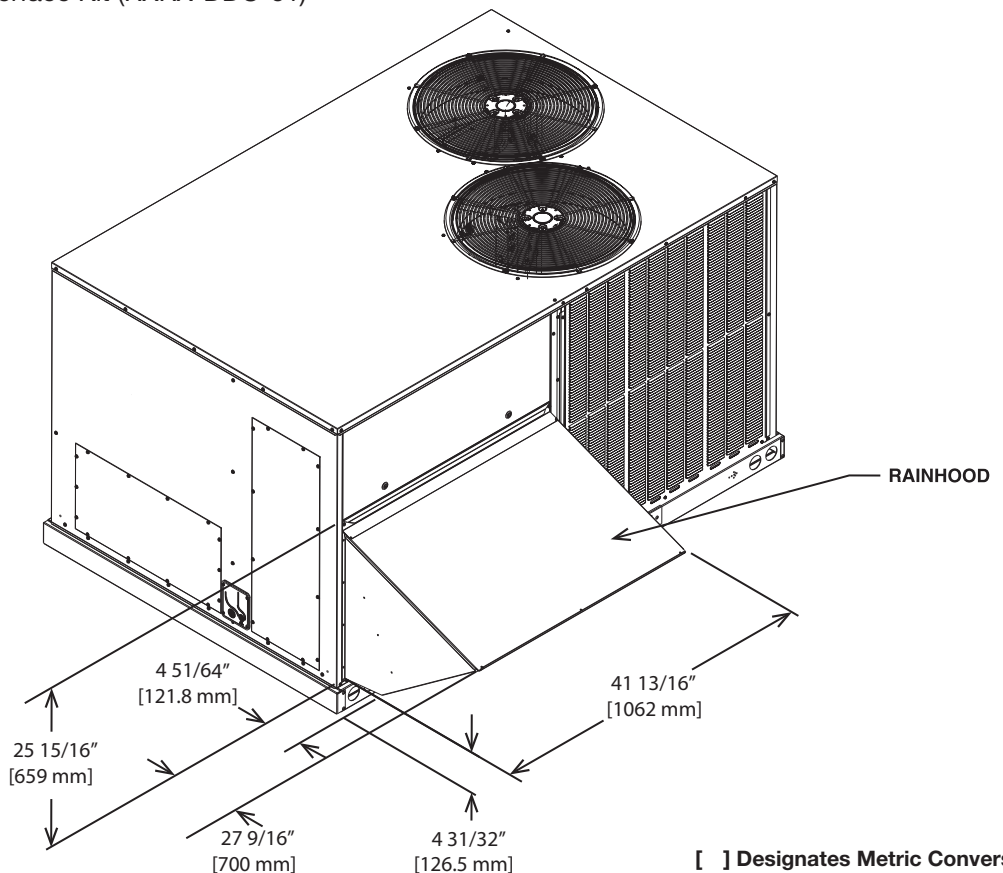

[] Designates Metric Conversions

NON-DDC ECONOMIZER W/SINGLE ENTHALPY (DOWNFLOW) RUSKIN ROOFTOP SYSTEMS ECONOMIZER WITH RRS BASIC CONTROLLER

Factory or Field-Installed


RXRD-41MDDAM3

PD955877 — Dual Enthalpy, Temperature and Humidity Sensor (for Ruskin Basic Controller)

RXXR-AR02 — Sensor, Carbon Dioxide (Wall Mount)

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide. Parallel action.
3. Blade edge seals shall be Ruskiprene™ type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. RRS controls feature the Basic economizer controller with 24V actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022. Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXXR-DDC01).

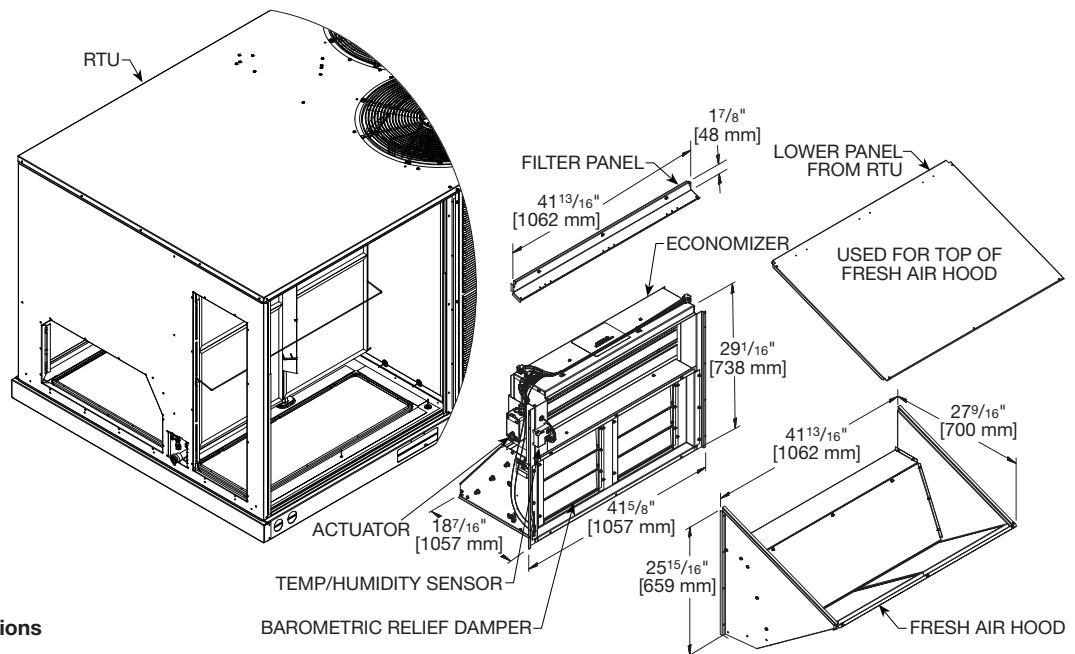

[] Designates Metric Conversions

NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (DOWNFLOW) RUSKIN ROOFTOP SYSTEMS ECONOMIZER WITH SIEMENS CONTROLLER

Factory or Field-Installed


RXRD-51MDDAM3

PD555460—Dual Enthalpy, Temperature and Humidity Sensor (for Siemens Controller)

RXXR-AR02—Sensor, Carbon Dioxide (Wall Mount)

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide. Parallel action.
3. Blade edge seals shall be Ruskiprene™ type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. Controls feature the Siemens controller with Siemens 24v actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022. Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXXR-DDC01).

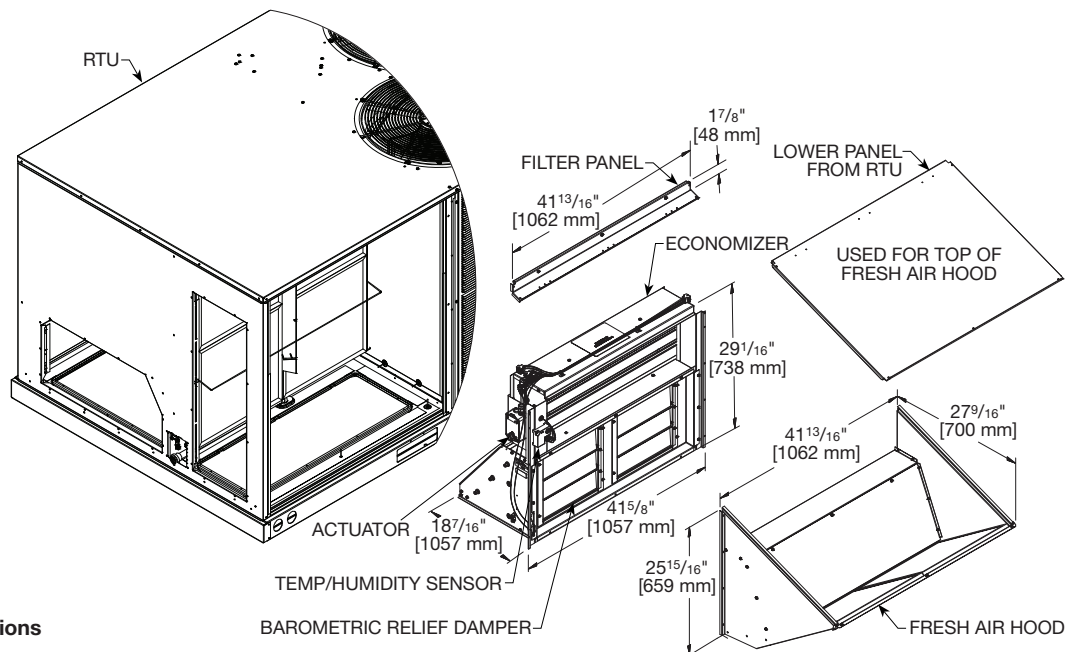

[] Designates Metric Conversions

NON-DDC ECONOMIZER WITH SINGLE ENTHALPY (HORIZONTAL) MICROMETL ECONOMIZER WITH SIEMENS CONTROLS



Field-Installed Only

RXRD-11MDHAM3

PD555460—Dual Enthalpy, Temperature and Humidity Sensor (for Siemens)

RXXR-AR02—Sensor, Carbon Dioxide (Wall Mount)

- Features **Siemens** Controls
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Low Leakage Dampers
- Slip-In Design for Easy Installation
- Standard Barometric Relief Damper
- Single Enthalpy with Dual Enthalpy Upgrade Kit Option
- CO₂ Input Sensor Option
- Field Assembled Hood Ships with Economizer
- Economizer Ships Complete for Horizontal Duct Application
- Field Installed Power Exhaust Option
- If connected to a Building Automation System (BAS), all economizer functions can be viewed on the (BAS) or 16 x 2 LCD screen
- If connected to thermostat, all economizer functions can be viewed on 16 x 2 LCD screen
- Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXXR-DDC01)

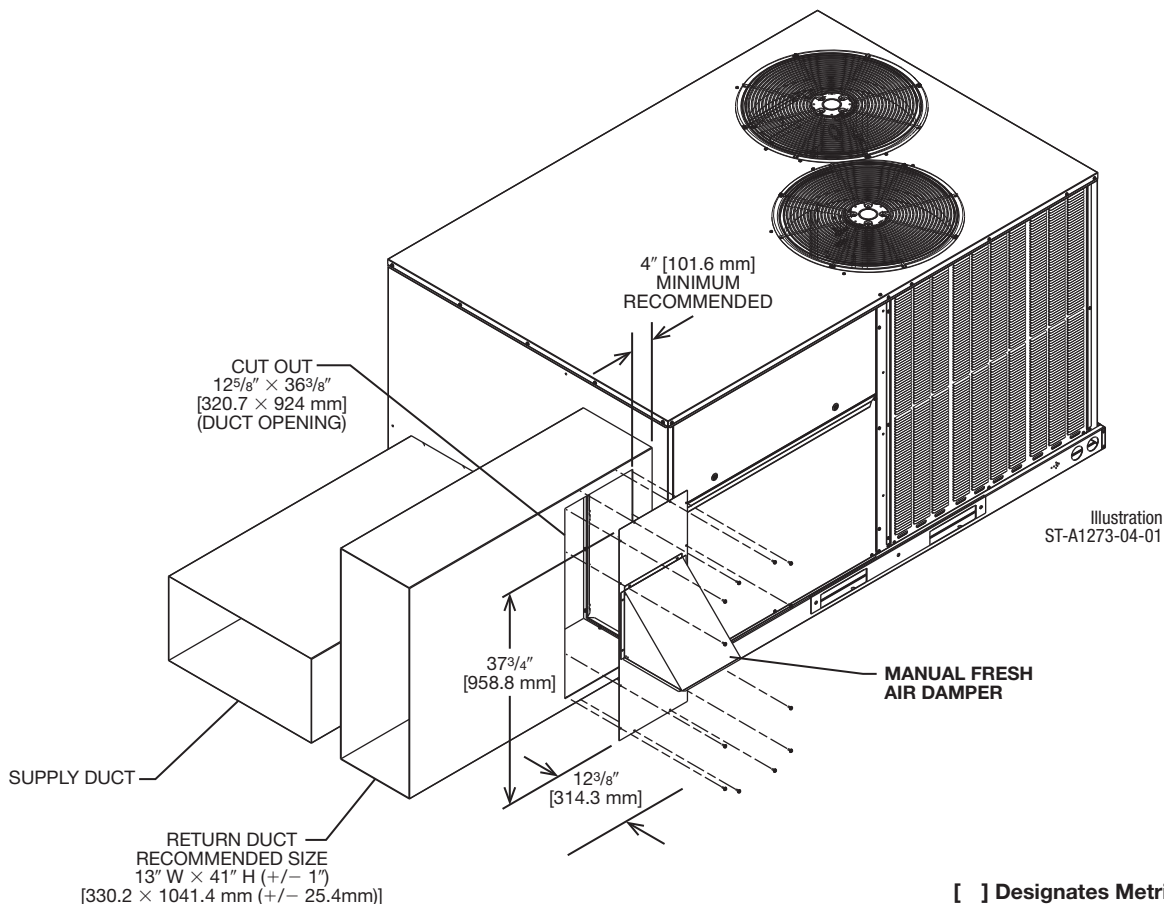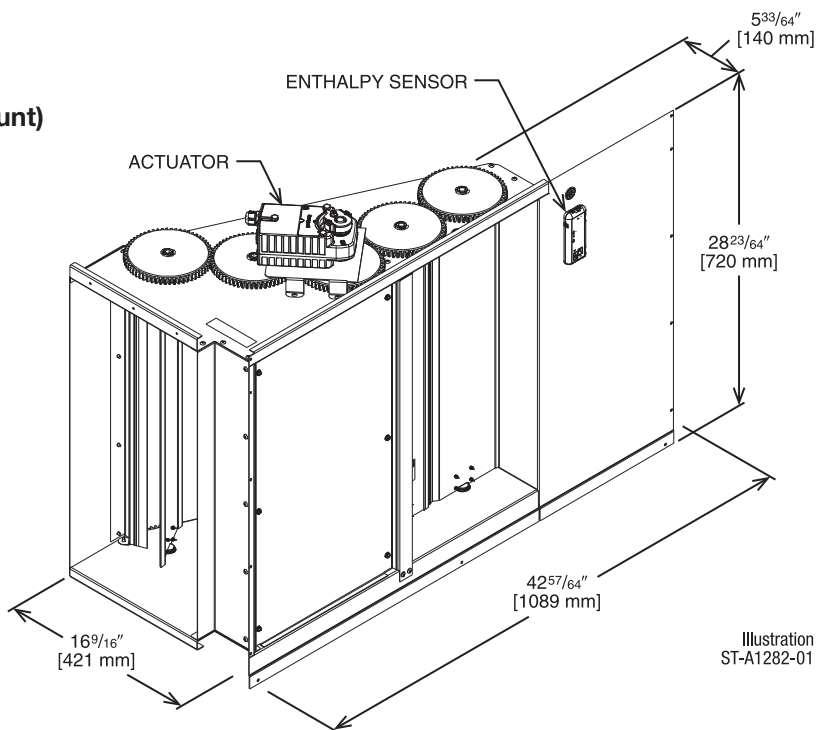

[] Designates Metric Conversions

NON-DDC ECONOMIZER W/SINGLE ENTHALPY (HORIZONTAL) RUSKIN ROOFTOP SYSTEMS ECONOMIZER WITH RRS BASIC CONTROLLER Field-Installed Only


RXRD-41MDHAM3

PD955977—Dual Enthalpy, Temperature and Humidity Sensor (for Ruskin Basic Controller)

RXXR-AR02—Sensor, Carbon Dioxide (Wall Mount)

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide. Parallel action.
3. Blade edge seals shall be Ruskiprene™ type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. RRS controls feature the Basic economizer controller with 24V actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022. Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXXR-DDC01).

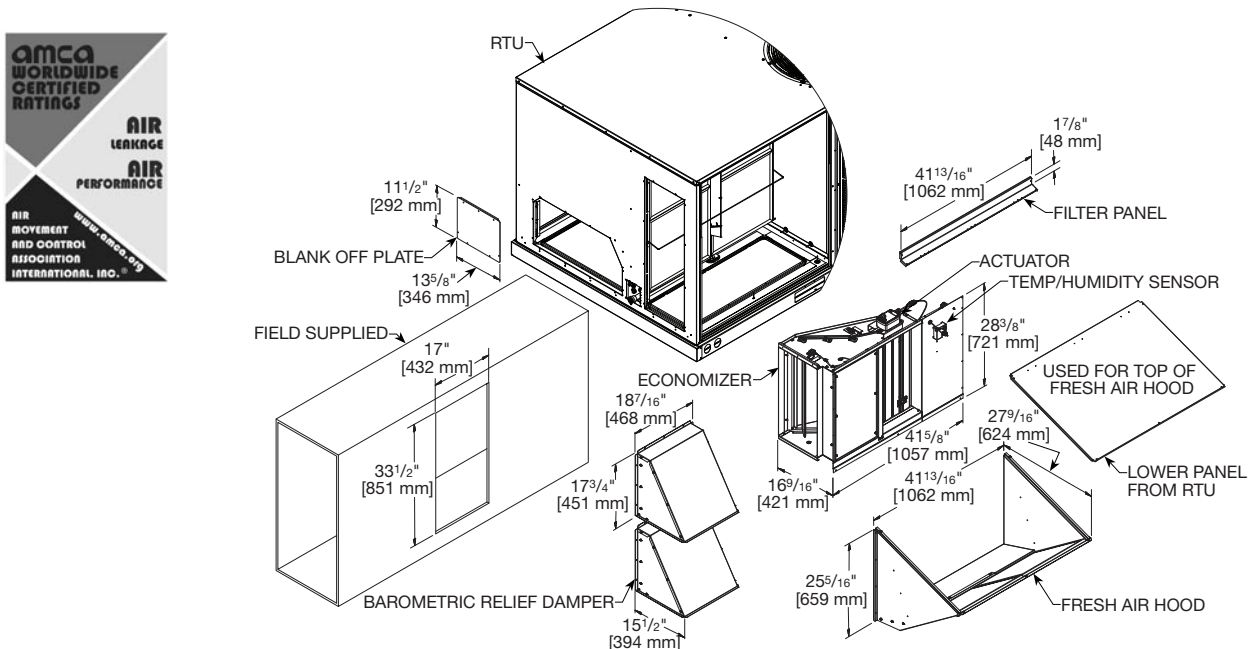

[] Designates Metric Conversions

NON-DDC ECONOMIZER W/SINGLE ENTHALPY (HORIZONTAL) RUSKIN ROOFTOP SYSTEMS ECONOMIZER WITH SIEMENS CONTROLLER Field-Installed Only


RXRD-51MDHAM3

PD555460—Dual Enthalpy, Temperature and Humidity Sensor (for Siemens Controller)

RXXR-AR02—Sensor, Carbon Dioxide (Wall Mount)

These ultra-low leak economizer dampers meet the following minimum construction standards:

1. Frame shall be 14 to 24 gauge galvanized steel channel.
2. Damper blades are galvanized steel airfoil shaped, double skin construction of 14 gauge [2.0] equivalent thickness, 6" [152 mm] wide. Parallel action.
3. Blade edge seals shall be Ruskiprene™ type or equivalent suitable for -72°F [-60°C] to +275°F [+135°C] mechanically locked into the blade edge. Adhesive or clip-on type seals are unacceptable.
4. Jamb seals shall be flexible metal, compression type to prevent leakage between blade end and damper frame. Blade end overlapping frame is unacceptable.
5. Bearings shall be stainless steel or nylon bushing.
6. Axles shall be hexagonal positively locked into the damper blade.
7. Drive mechanism shall be concealed out of airstream to reduce pressure drop and noise.
8. Economizer damper is tested and rated based upon AMCA Publication 500-D.
9. RRS controls feature the Basic economizer controller with 24V actuator. Controls capable of Economizer Fault Detection and Diagnostics for code compliance.
10. Damper shall meet the leakage requirements of the International Energy Conservation Code by leaking less than 3 cfm/sq. ft. at 1" of static pressure and shall be AMCA licensed as a class 1A damper. Complies with reliability and performance requirements as specified by the California Energy Commission's Title 24 Standard and ASHRAE 90.1 2022. Economizer dampers shall be Ruskin Rooftop Systems ECD60 model.
11. Can be Converted to DDC Operation with the Economizer Universal DDC Interface Kit (RXXR-DDC01).

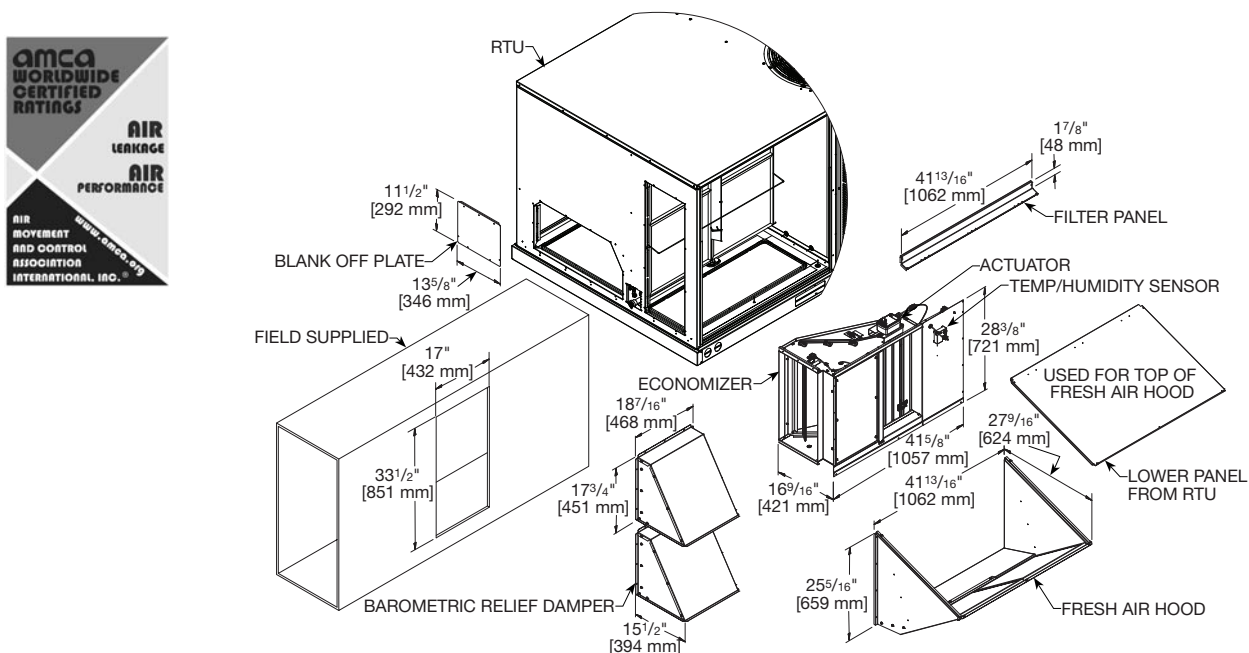

[] Designates Metric Conversions

ECONOMIZER UNIVERSAL DDC INTERFACE KIT

Available Factory or Field Installed


RXR-DDC01

- Allows any Non-DDC Economizer to be used with a ClearControl DDC model
- Mounts on the Economizer
- Provides Mounting location for Economizer Controller
- Provides wire management for excess wire

NOTE: Older DDC Models, prior to A2L, may require a field update to the ClearControl Software. The minimum version required is 3.15. A2L Models will come with software version 4.0 or higher.


Drawings shown here may not be an exact representation of every economizer.

HORIZONTAL FLOW DDC BRACKET SETUP

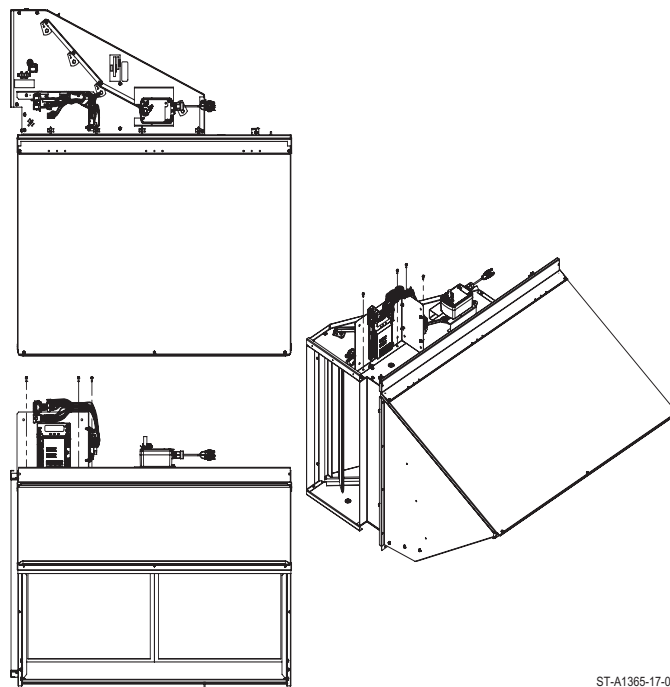

ST-A1365-17-00

DOWNFLOW ECONOMIZER DDC BRACKET SETUP

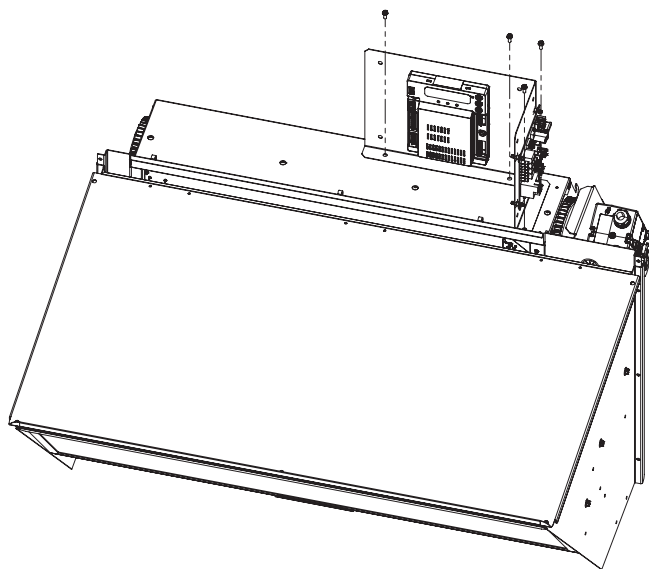

ST-A1365-13-01

FRESH AIR DAMPER
FRESH AIR DAMPER, MANUAL
RXRF-ADA1

DOWNFLOW APPLICATION

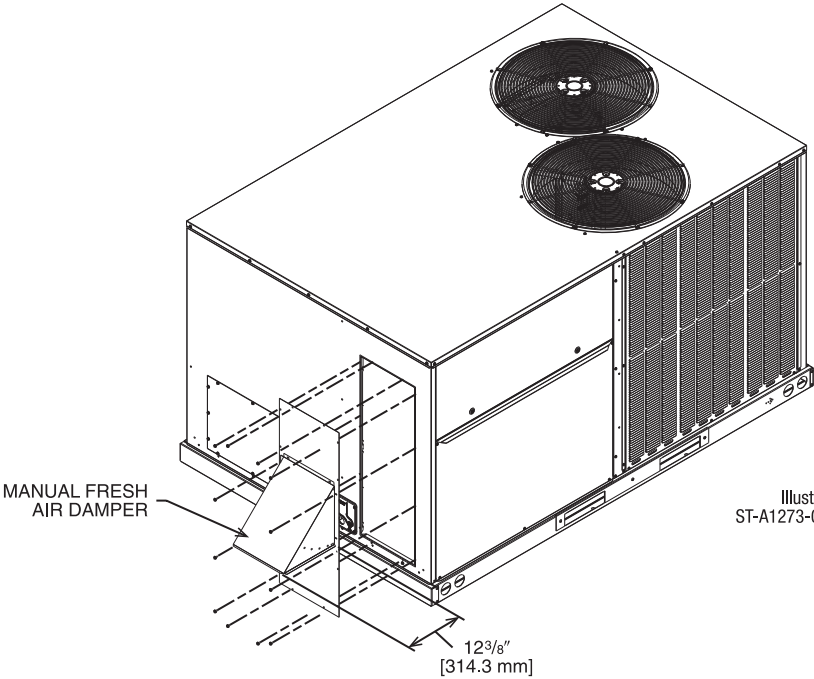


Illustration
ST-A1273-03-00

HORIZONTAL APPLICATION

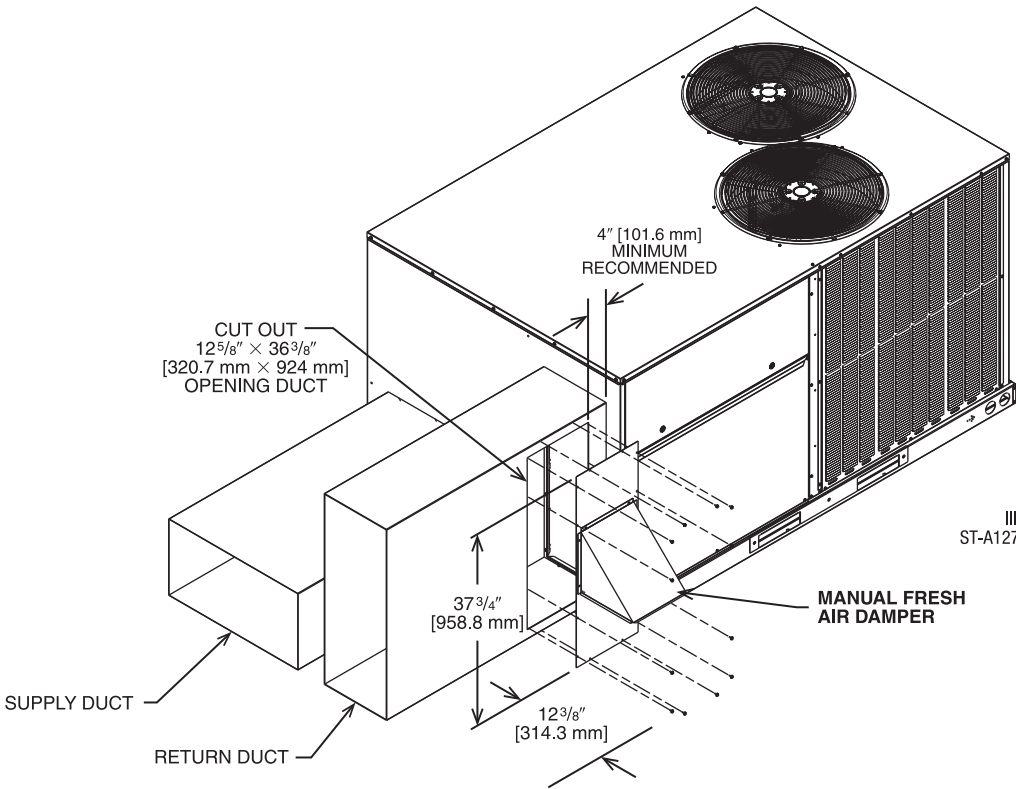


Illustration
ST-A1273-04-00

[] Designates Metric Conversions

FRESH AIR DAMPER

FRESH AIR DAMPER, MOTORIZED RXRF-ADB1

FRESH AIR DAMPER, MOTORIZED (DDC) RXRF-ADC1 (Modulating Motor Kit with position feedback for DDC Models)

- Features **Honeywell** Controls
- Gear Driven Direct Drive Actuator
- Fully Modulating (0-100%)
- Low Leakage Dampers
- Slip-In Design for Easy Installation
- Plug-In Polarized 12-pin and 4-pin Electrical Connections
- Pre-Configured—No Field Adjustments Necessary
- Addition of Dual Enthalpy Upgrade Kit allows limited economizer function
- CO₂ Sensor Input Available for Demand Control Ventilation (DCV)
- Optional Remote Minimum Position Potentiometer (270 ohm) (Honeywell #S963B1136) is available from Prostock
- All fresh air damper functions can be viewed at the RTU-C unit controller display
- If connected to a Building Automation System (BAS), all fresh air damper functions can be viewed on the (BAS)

[] Designates Metric Conversions

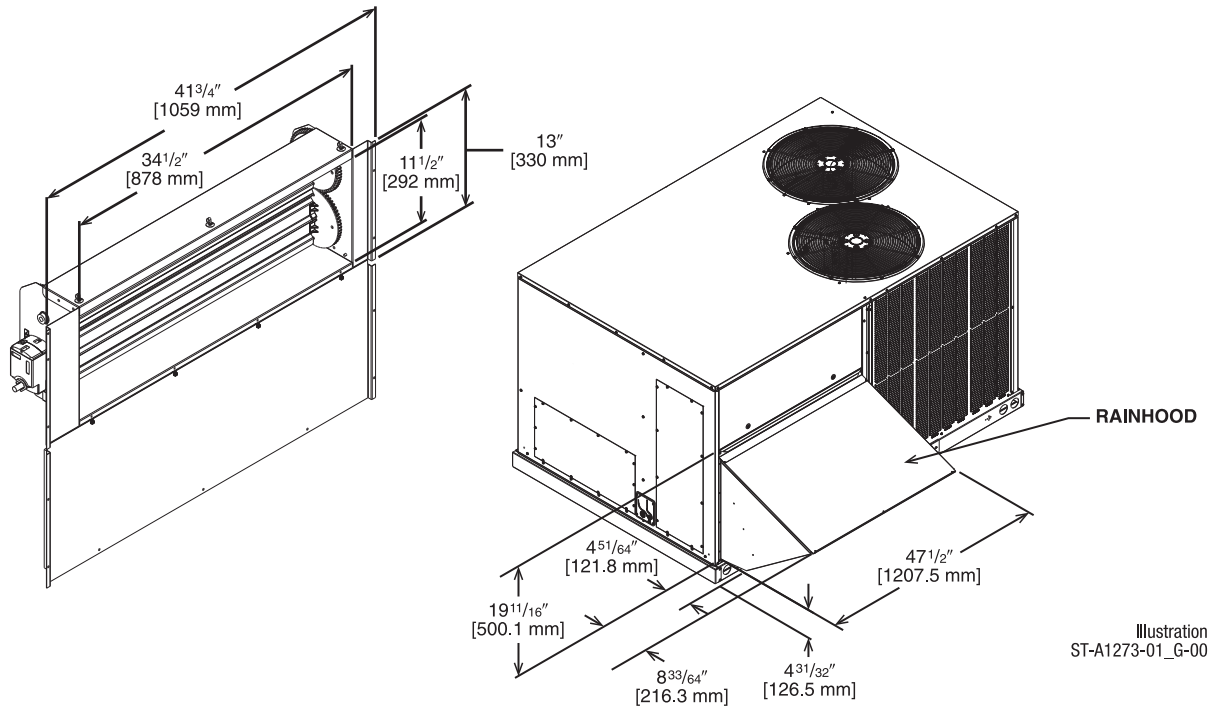


Illustration
 ST-A1273-10-00

Illustration
 ST-A1273-01_G-00


POWER EXHAUST KIT, CONVERTIBLE

RXXR-CDF01*


*Voltage Code: C or D

- Convertible between vertical airflow and horizontal airflow
- Compatible with all D-cabinet economizers
- Economizer sold separately

VERTICAL AIRFLOW INSTALLATION

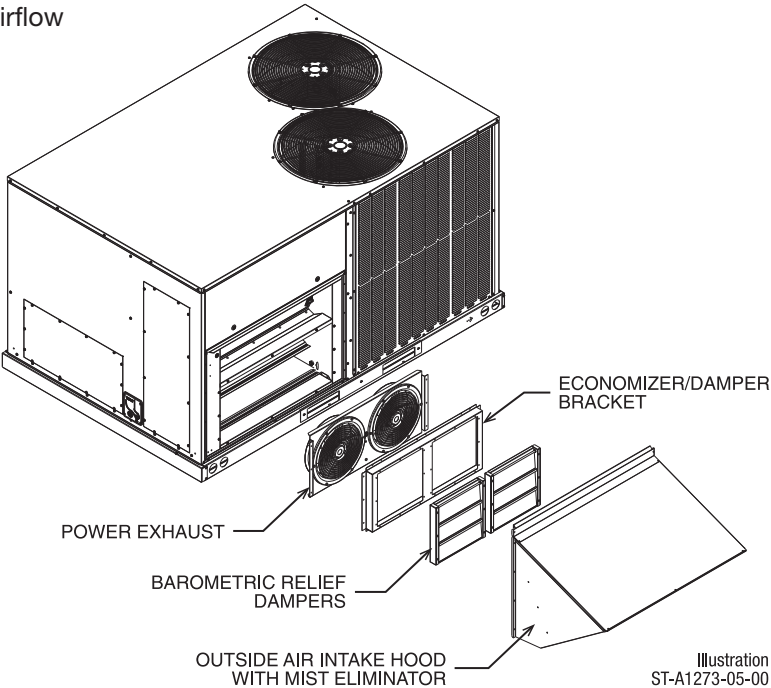

HORIZONTAL AIRFLOW INSTALLATION

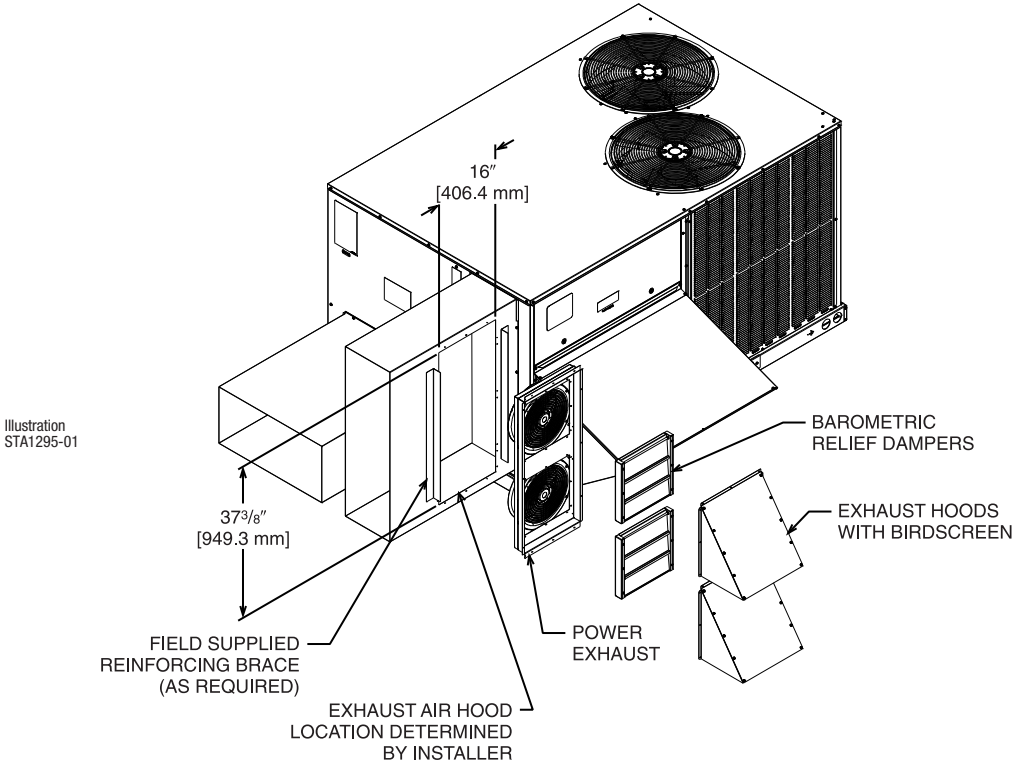

Model No.	No. of Fans	Volts	Phase	HP (ea.)	CFM [L/s]*	RPM	FLA (ea.)	LRA (ea.)
RXXR-CDF01C	2	208/230	1	0.47	2200	3000	1.55	1.1
RXXR-CDF01D	2	460	3	0.40	1970	2750	0.51	1.9

*CFM is per fan at 0" w.c. external static pressure.


[] Designates Metric Conversions

POWER EXHAUST KIT FOR DOWNFLOW ECONOMIZER

RXXRX-RDF01*

*Voltage Code: C, D, or Y

- Shipped completely assembled
- All wiring from control box to economizer is supplied
- Color coordinated with the unit
- Fully insulated with 1" 1.5 lb. fiberglass insulation
- Motors are factory wired and tested
- The powered exhaust sits below the unit base rails by 5 inches. Consider roof surface clearance before purchasing
- When using this power exhaust system, clearance between the bottom of the unit and finished roof deck should be a minimum of 10 inches. Some applications may require a taller roof curb for proper installation
- **Economizer Sold Separately**

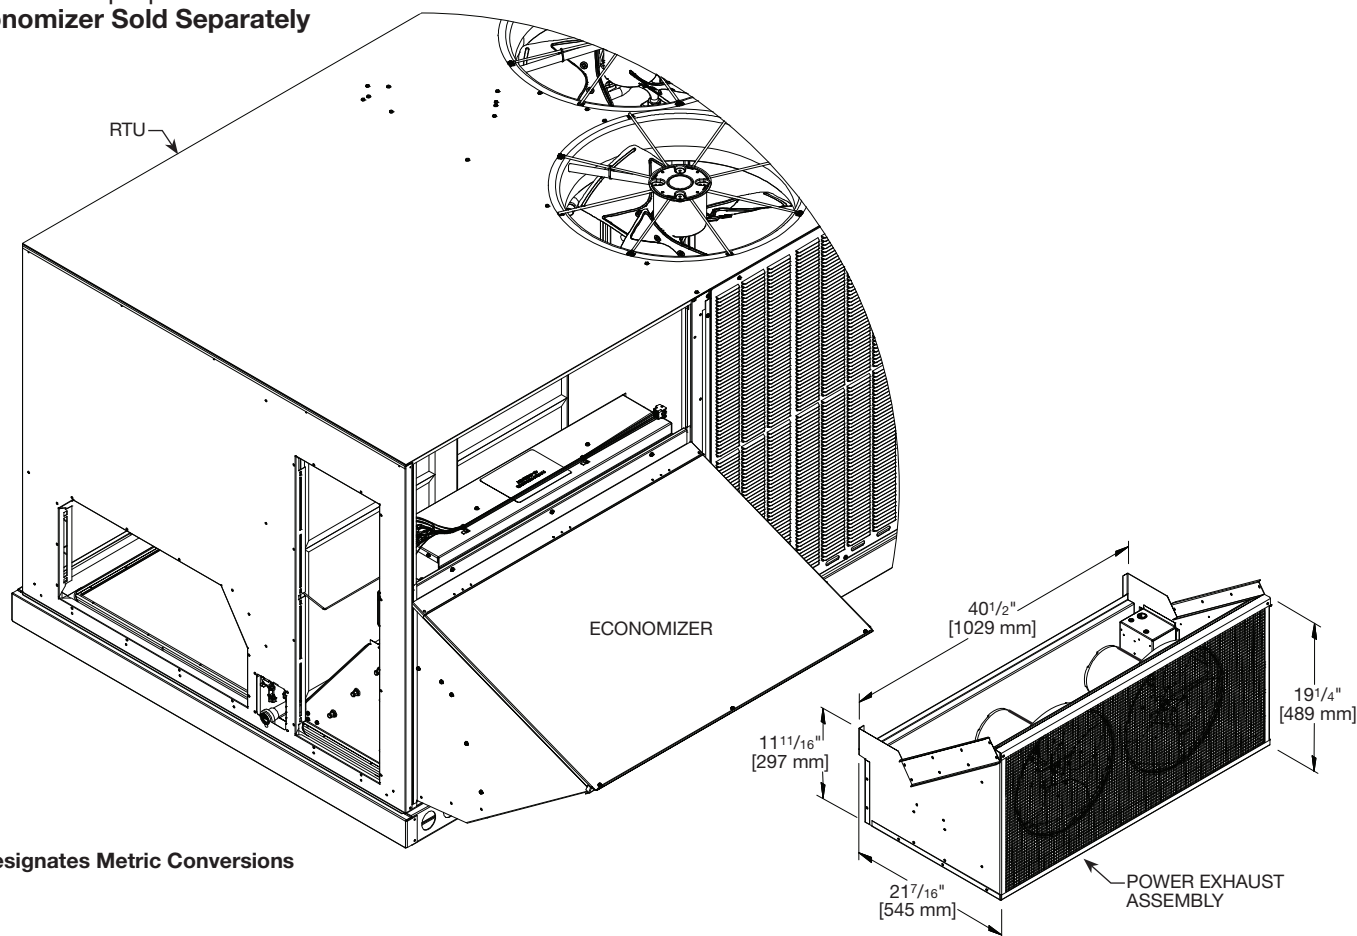

[] Designates Metric Conversions


Model No.	Volt	Phase	Motor				Unit				@ 0.1 CFM
			HP	RPM	LRA	Qty.	Cir. Qty.	FLA	MCA	Fuse Size	
RXXRX-RDF01C	208/230	1	1/2	1625	5.86	2	1	5.40	6.75	8	4013
RXXRX-RDF01D	460				3.33			2.68	3.35	4	
RXXRX-RDF01Y	575				2.52			2.12	2.65	3	

POWER EXHAUST KIT FOR HORIZONTAL ECONOMIZER

RXXR-RDF03*

*Voltage Code: C, D, or Y


- Shipped completely assembled
- All wiring from control box to economizer is supplied
- Color coordinated with the unit
- Fully insulated with 1" 1.5 lb. fiberglass insulation
- Motors are factory wired and tested
- When using this power exhaust system, clearance between the bottom of the unit and finished roof deck should be a minimum of 10 inches. Some applications may require a taller roof curb for proper installation
- Economizer with Relief Hood Sold Separately

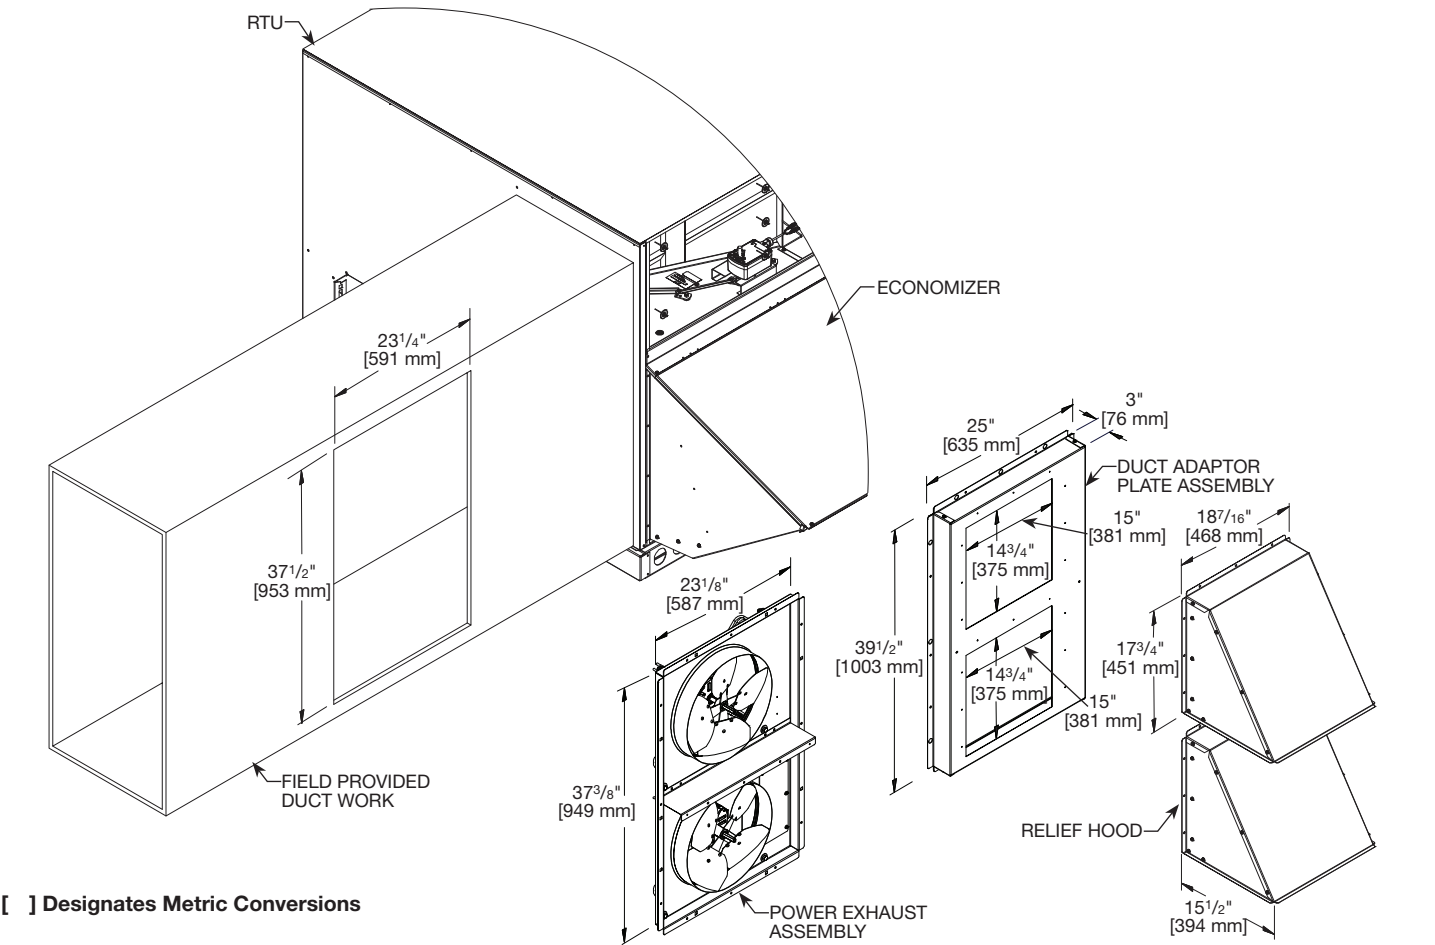

Model No.	Volt	Phase	Motor				Unit				@ 0.1 CFM
			HP	RPM	LRA	Qty.	Cir. Qty.	FLA	MCA	Fuse Size	
RXXR-RDF03C	208/230	1	1/2	1625	5.86	1	1	2.70	3.38	6	2013
RXXR-RDF03D	460				3.33			1.34	1.68	3	
RXXR-RDF03Y	575				2.52			1.06	1.33	2	

ROOFCURBS (Full Perimeter)

- Rheem's roofcurb design can be utilized on all 7.5-12.5 ton [26.4-44.0 kW] RACD models
- Two available heights (14" [356 mm] and 24" [610 mm]) for ALL models
- Quick assembly corners for simple and fast assembly
- Opening provided in bottom pan to match the "Thru the Curb" electrical connection opening provided on the unit base pan
- 1" [25 mm] x 4" [102 mm] Nailer provided
- Insulating panels not required because of insulated outdoor base pan
- Sealing gasket (40' [12.2 m]) provided with Roofcurb
- Packaged for easy field assembly

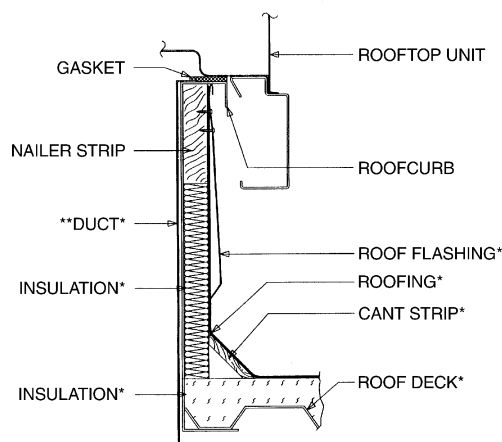

*BY CONTRACTOR

**FOR INSTALLATION OF DUCT AS SHOWN, USE RECOMMENDED DUCT SIZES FROM ROOFCURB INSTALLATION INSTRUCTIONS. FOR DUCT FLANGE ATTACHMENT TO UNIT, SEE UNIT INSTALLATION INSTRUCTIONS FOR RECOMMENDED DUCT SIZES.

Illustration
ST-A0743-02

Roofcurbs View	Roofcurb Model	Height of Curb
A	RXKG-DDD14	14" [356 mm]
A	RXKG-DDD24	24" [610 mm]

ROOFCURB INSTALLATION


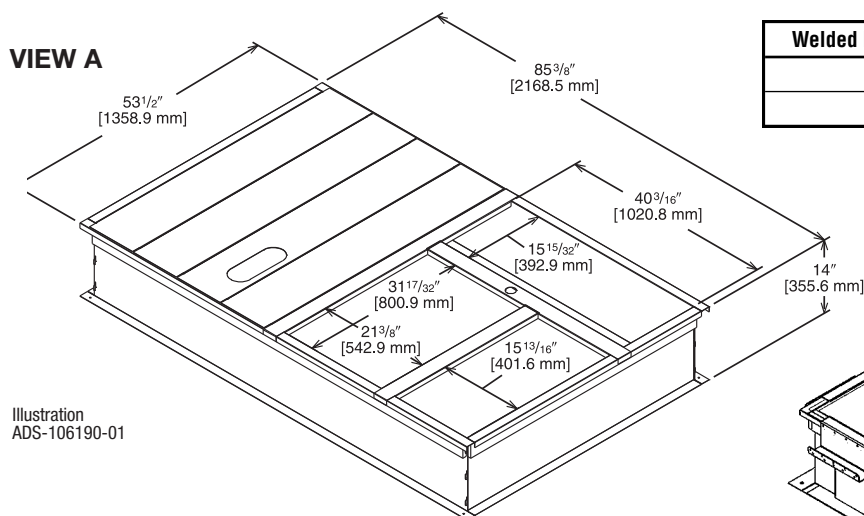


Illustration
ADS-106190-01

Welded Roofcurbs View	Roofcurb Model	Dimensions
B	RXKG-SD14	85.375" x 53.5" x 14.0"
B	RXKG-SD24	85.375" x 53.5" x 24.0"

WELDED ROOFCURB VIEW B

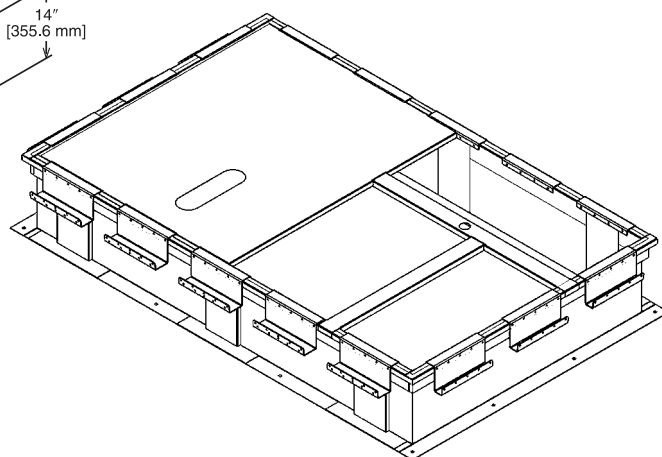

- State of Florida Approved: Approval Number FL 26981.1 for Technical Evaluation Report TER-20-28788 certifies the HVAC Unit and mounting methods for high wind resistance are compliant per Florida Building Code.
- QSHPD Approved: State of California Product Approval Number OSP-06660-TEMP00 for Technical Evaluation Report 1700876-CR-001-RO certifies the HVAC Unit and MicroMetl Welded Roof Curb is earthquake resistance compliant and approved for use per International Code Council – Evaluation Service AC156, IBC, AND CBC building code standards.

[] Designates Metric Conversions




ROOFCURB ADAPTERS (CONTINUED)

RXRX-DDCAE

Illustration
ADS-106176-01
SHEET 2

APPROXIMATE STATIC PRESSURE DROP

@2,000 = 0.06" w.g.
@3,000 = 0.12" w.g.
@4,000 = 0.22" w.g.
@5,000 = 0.36" w.g.

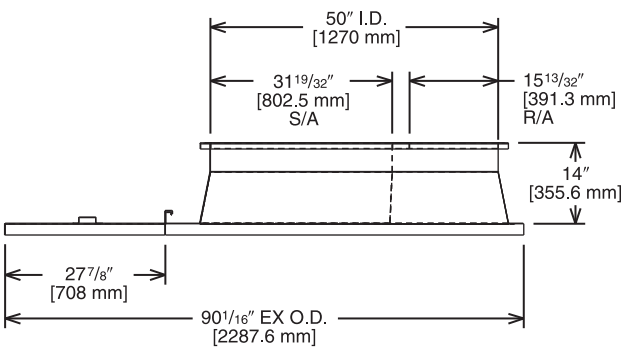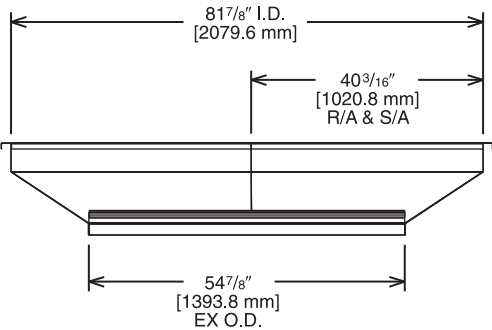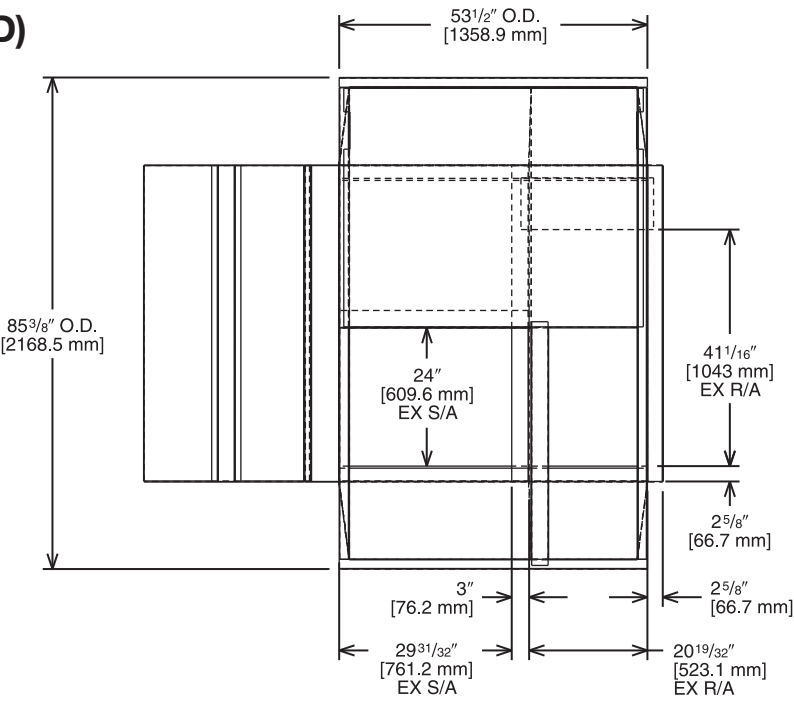

TOP VIEW

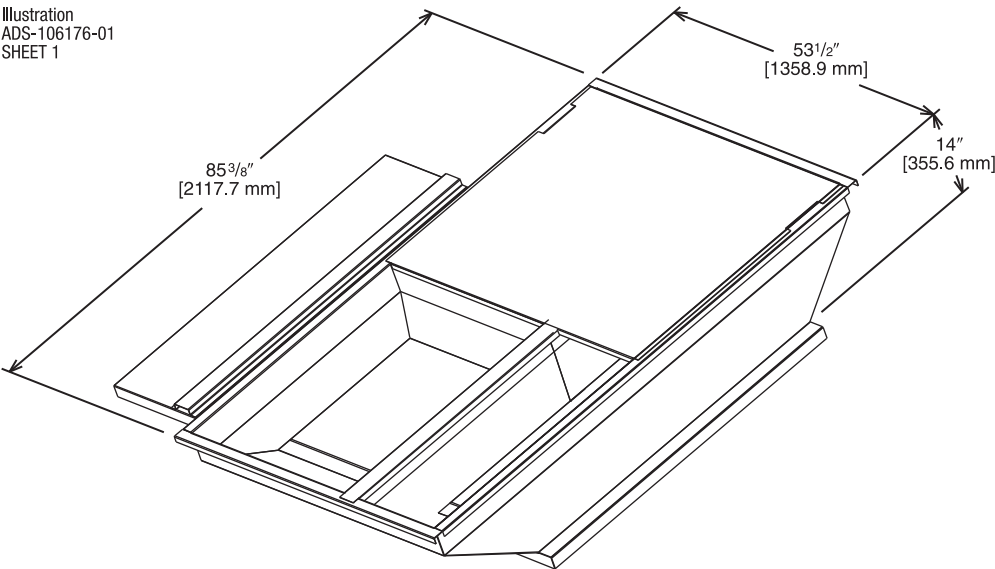


Illustration
ADS-106176-01
SHEET 1

[] Designates Metric Conversions

Guide Specifications RACDYB—090-150

You may copy this document directly into your building specification. This specification is written to comply with the 2016 version of the “master format” as published by the Construction Specification Institute. www.csinet.org.

ELECTRIC HEAT PACKAGED ROOFTOP

HVAC Guide Specifications

Size Range: 7 ½ to 12 ½ Nominal Tons

- 1.00 General:
 - A. Outdoor, rooftop mounted, electrically controlled, heating and cooling unit utilizing a(n) hermetic scroll compressor(s) for cooling duty and heat pump for heating duty.
 - B. Factory assembled, single-piece heating and cooling rooftop unit. Contained within the unit enclosure shall be all factory wiring, piping, controls, and special features required prior to field start-up.
 - C. Unit shall use environmentally safe, R-454B refrigerant.
 - D. Unit shall be installed in accordance with the manufacturer’s instructions.
 - E. Unit must be selected and installed in compliance with local, state, and federal codes.
 - F. Model and serial data shall be printed inside the control box.
- 1.01 Quality Assurance:
 - A. Unit meets ASHRAE 90.1 2022 minimum efficiency requirements.
 - B. Unit shall be rated in accordance with AHRI Standards 340/360.
 - C. Unit shall be designed to conform to ASHRAE 15.
 - D. Unit shall be UL-tested and certified in accordance with Standards and UL-listed and certified under Canadian standards as a total package for safety requirements.
 - E. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.
 - F. Unit casing shall be capable of withstanding 1000-hour salt spray exposure per ASTM B117 (scribed specimen).
 - G. Roof curb shall be designed to conform to NRCA Standards.
 - H. Unit shall be subjected to a completely automated run test on the assembly line. The data for each unit will be stored at the factory, and must be available upon request.
 - I. Unit shall be designed in accordance with UL Standard 60335-2-40 4th Edition. including tested to withstand rain.
 - J. Unit shall be constructed to prevent intrusion of snow and tested to prevent snow intrusion into the control box up to 40 mph.
- 1.02 Manufacturer Qualifications
 - A. Unit shall be designed in accordance with ISO 9001:2015, and shall be manufactured in a facility registered by ISO 9001:2015.
- 1.03 Installer Qualifications
 - A. The installer shall be trained to install and service equipment with A2L refrigerants.
- 1.04 Delivery, Storage, and Handling:
 - A. Unit shall be stored and handled per manufacturer’s recommendations.
 - B. Unit lifted by crane requires either shipping top panel or spreader bars.
 - C. Unit shall only be stored or positioned in the upright position.
- 1.05 Unit Cabinet:
 - A. Unit cabinet shall be constructed of galvanized steel.
 - B. Unit cabinet exterior paint shall be pre-painted steel.
 - C. The sheet-metal cabinet shall be constructed of 18-gauge material for structural components with an underlying coat of G90.
 - D. Evaporator fan compartment interior cabinet insulation shall conform to AHRI Standards 210 or 360 minimum exterior sweat criteria. Interior surfaces shall be insulated with a minimum 1/2-in. thick, 1.6 lbs density, flexible fiberglass insulation, foil faced on the air side. Aluminum foil-faced fiberglass insulation shall be used in the gas heat compartment.
 - E. Shall utilize uniform screw sizing.
 - F. Base of unit shall have a location for thru-the-base gas and electrical connections standard.

- G. Base Rail:
 - i. Unit shall have base rails on a minimum of 4 sides.
 - ii. Holes shall be provided in the base rails for rigging shackles to facilitate maneuvering and overhead rigging.
 - iii. Holes shall be provided in the base rail for moving the rooftop for fork truck.
 - iv. Base rail shall be a minimum of 14 gauge thickness.
- H. Condensate pan and connections:
 - i. Shall be a sloped condensate drain pan made of a non-corrosive material and be removable for cleaning.
 - ii. Shall comply with ASHRAE Standard 62.
 - iii. Shall use a 3/4" NPT drain connection, possible either through the bottom or side of the drain pan. Connection shall be made per manufacturer's recommendations.
 - iv. Shall be able to be easily removed.
 - v. Shall be separate from the coil.
- I. Standard factory installed condensate overflow sensor.
- J. Top panel
 - i. Shall be a single piece top panel over indoor section.
- K. Electrical Connections
 - i. All unit power wiring shall enter unit cabinet via a single, factory-prepared, continuous raised flange opening in the basepan.
 - ii. Thru-the-base capability
 - a. Standard unit shall have a thru-the-base electrical location(s) using a raised, continuous raised flange opening in the basepan.
 - b. No basepan penetration, other than those authorized by the manufacturer, is permitted.
- L. Component access panels (standard)
 - i. Cabinet panels shall be easily opened for servicing.
 - ii. Panels covering the filters shall have hinges with ¼ turn fasteners.
 - iii. 1/4 turn fasteners shall be permanently attached.
- 1.06 Operating Characteristics:
 - A. Unit shall be capable of starting and running at 115°F (46°C) ambient outdoor temperature, meeting maximum load criteria of AHRI Standard 340/360 at ± 10% voltage.
 - B. Compressor with standard controls shall be capable of operation down to 50°F (10°C), ambient outdoor temperatures. Low ambient accessory kit is necessary if mechanically cooling at ambient temperatures to 0°F (-17.7°C).
 - C. Unit shall discharge supply air vertically or horizontally as shown on contract drawings.
 - D. Unit shall be factory configured for vertical supply & return configurations.
 - E. Unit shall be field convertible from vertical to horizontal configuration.
 - F. Unit shall be capable of mixed operation: vertical supply with horizontal return or horizontal supply with vertical return.
- 1.07 Electrical Requirements
 - A. Main power supply voltage, phase, and frequency must match those required by the manufacturer.
- 1.08 Evaporator fan compartment:
 - A. Interior cabinet surfaces shall be insulated with a minimum 1/2-in. thick, minimum 1.6 LB density, flexible fiberglass insulation bonded with foil face on the air side.
 - B. Insulation and adhesive shall meet NFPA 90A requirements for flame spread and smoke generation.
 - C. Insulation shall also be mechanically fastened with welded pin and retainer washer.
- 1.09 Thermostats
 - A. Thermostat must:
 - i. Energize both "W" and "G" when calling for heat.
 - ii. Have capability to energize 1 stage of cooling, and at least 1 stage of heating.
 - iii. Include capability for occupancy scheduling.
- 1.10 Electronic Control System for HVAC:
 - A. Shall be complete with self-contained low-voltage control circuit protected by a fuse on the 24-V transformer side (090-150 units have a resettable circuit breaker).
 - B. Shall utilize color-coded wiring.
 - C. Unit shall include a minimum of one 8-pin screw terminal connection board for connection of control wiring.
 - D. Unit control board shall be provided with 7 segment readout via LCD display for status and diagnostics.

1.10.01 Safeties:

- A. Compressor over-temperature, over current.
- B. Standard Low-pressure switch:
 - i. Units shall have low pressure, loss of charge automatic reset device that will shut off compressor when tripped.
 - ii. Low pressure control:
 - a. Provides active protection in both heating and cooling modes at all outdoor ambient temperatures. The low pressure control is an automatic reset type and opens at approximately 15 psig and closes at approximately 40 psig. Operation is slightly different between cooling and heating modes.
- C. Standard High-pressure switch:
 - i. Unit shall be equipped with high pressure switch device that will shut off compressor when tripped.
 - ii. High pressure control:
 - a. The high pressure control is an automatic reset type and opens at approximately 610 psig and closes at approximately 420 psig. The compressor and fan motor will stop when the high pressure control opens and will start again if the high side pressure drops to approximately 420 psig where the automatic reset high pressure control resets. If the high pressure control opens 3 times within a particular call for heating or cooling operation, the defrost control will lock out compressor and outdoor fan operation.
- D. Automatic reset, motor thermal overload protector.
- E. The unit must be permanently grounded.
- F. Components are not compatible between different refrigerants. Do not use R-410A service equipment or components on R-454B equipment. System or part failure could occur.

1.11 Standard Filter Section:

- A. Filters shall consist of factory-installed, low velocity, throwaway 2-in. thick fiberglass filters of commercially available sizes.
- B. Unit will accept both 2-in. and 4-in. filters.
- C. Filter face velocity shall not exceed 365 fpm at nominal airflows.
- D. Filters shall be accessible through an access panel with “no-tool” removal as described in the unit cabinet section of the specification.
- E. Filters access is specified in the unit cabinet section of this specification.
- F. Filters shall be held in place by metal rods, facilitating easy removal and installation.

1.12 Coils

- A. Standard Aluminum/MicroChannel Coils:
 - i. Standard evaporator and condenser coils shall be aluminum.
 - ii. Evaporator and condenser coils shall be leak tested to 150 psig, pressure tested to 400 psig, and qualified to burst test at 2,200 psi.

1.13 Refrigerant Components:

- A. Refrigerant circuit shall include the following control, safety, and maintenance features:
 - i. TXV metering system shall prevent mal-distribution of two-phase refrigerant.
 - ii. Refrigerant filter drier.
 - iii. Service gauge connections on suction and discharge lines.
 - iv. External pressure gauge ports access shall be located in front exterior of cabinet.
 - v. External gauge ports shall be lockable.
- B. Compressors:
 - i. 090-120 units shall use one fully hermetic, 2 stage scroll compressor.
 - ii. 150 units shall use a tandem set of fully hermetic, single stage compressors.
 - iii. Compressor motors shall be cooled by refrigerant gas passing through motor windings.
 - iv. Compressors shall be internally protected from high discharge temperature conditions.
 - v. Compressors shall be protected from an over-temperature and over-amperage conditions by an internal, motor overload device.
 - vi. Compressor shall be factory mounted on rubber grommets.
 - vii. Compressor motors shall have internal line break thermal and current overload protection.
 - viii. Crankcase heaters shall not be required for normal operating range.
 - ix. Compressor shall have molded electrical plug.

- 1.14 Evaporator Fan and Motor:
 - A. Evaporator Fan Motor:
 - i. Shall have permanently lubricated bearings.
 - ii. Shall have inherent automatic-reset thermal overload protection.
 - iii. Shall have a maximum continuous bhp rating for continuous duty operation; no safety factors above that rating shall be required.
 - B. Direct Drive Evaporator Fan:
 - i. Belt drive shall include an adjustable-pitch motor pulley.
 - ii. Shall use sealed, permanently lubricated ball-bearing type.
 - iii. Blower fan shall be double-inlet type with forward-curved blades.
 - iv. Shall be constructed from steel with a corrosion resistant finish and dynamically balanced.
 - C. Blower Assembly:
 - i. Entire assembly shall be able to slide out completely.
 - ii. Shall be able to slide-out without the removal of the roof and condenser fan motors.
- 1.15 Condenser Fans and Motors:
 - A. Condenser Fan Motors:
 - i. Shall be a totally enclosed motor.
 - ii. Shall use permanently lubricated bearings.
 - iii. Shall have inherent thermal overload protection with an automatic reset feature.
 - iv. Shall use a shaft-down design. Shaft-up designs including those with "rain-slinger devices" shall not be allowed.
 - B. Condenser Fans:
 - i. Shall be a direct-driven propeller type fan.
 - ii. Shall have blades riveted to corrosion-resistant steel spiders and shall be dynamically balanced.
- 1.16 RTU-C Controller:
 - A. Shall be ASHRAE 62-2001 compliant.
 - B. Shall accept 18-32VAC input power.
 - C. Shall have an operating temperature range from -40°F (-40°C) to 158°F (70°C), 10%–95% RH (non-condensing).
 - D. Controller shall accept the following inputs: space temperature, setpoint adjustment, outdoor air temperature, indoor air quality, outdoor air enthalpy, fire shutdown, return air enthalpy, fan status, remote time clock/door switch.
 - E. Shall accept a CO2 sensor in the conditioned space, and be Demand Control Ventilation (DCV) ready.
 - F. Shall provide the following outputs: Economizer, fan, cooling stage 1, cooling stage 2, heat stage 1, heat stage 2, exhaust, occupied.
 - G. Unit shall provide surge protection for the controller through a circuit breaker.
 - H. Shall have a field installed communication card allowing the unit to be able to communicate at a Baud rate of 19.2K or faster.
 - I. Shall have an LED display independently showing the status of activity on the communication bus, and processor operation.
 - J. Optional field installed BACnet plug-in communication card which includes an EIA-485 protocol communication port, or an optional field installed LonWorks plug-in communications card.
 - K. Software upgrades will be accomplished by local download. Software upgrades through chip replacements are not allowed.
 - L. Shall be shock resistant in all planes to 5G peak, 11ms during operation, and 100G peak, 11ms during storage.
 - M. Shall be vibration resistant in all planes to 1.5G @ 20-300 Hz.
 - N. Shall support a bus length of 4000 ft max, 60 devices per 1000 ft section, and 1 RS-485 repeater per 1000 ft sections.
- 1.17 Open Protocol, Direct Digital Controller:
 - A. Shall be ASHRAE 62-2001 compliant.
 - B. Shall accept 18-30VAC, 50-60Hz, and consumer 15VA or less power.
 - C. Shall have an operating temperature range from -40°F (-40°C) to 130°F (54°C), 10% - 90% RH (non-condensing).
 - D. Shall have either a field installed BACnet plug-in communication card which includes an EIA-485 protocol communication port, or a field installed LonWorks plug-in communications card.
 - E. The BACnet plug in communication card shall include built-in protocol for BACnet (MS/TP and PTP modes).
 - F. The LonWorks plug in communication card shall include the Echelon processor required for all Lon applications.
 - G. Shall allow access of up to 62 network variables (SNVT). Shall be compatible with all open controllers.

- H. Baud rate Controller shall be selectable through the EIA-485 protocol communication port.
- I. Shall have an LED display independently showing the status of serial communication, running, errors, power, all digital outputs, and all analog inputs.
- J. Shall accept the following inputs: space temperature, setpoint adjustment, outdoor air temperature, indoor air quality, outdoor air enthalpy, compressor lock-out, fire shutdown, enthalpy switch, and fan status/filter status/humidity/remote occupancy.
- K. Shall provide the following outputs: economizer, fan, cooling stage 1, cooling stage 2, heat stage 1, heat stage 2, exhaust.
- L. Software upgrades will be accomplished by either local or remote download. No software upgrades through chip replacements are allowed.
- M. Shall be natively equipped with Modbus communication protocol.

1.18 Gas Heat Compartment

- A. Unit shall be supplied with an electronic variable frequency drive for the supply air fan.
- B. Drive shall be factory installed in an enclosed cabinet.
- C. Drive shall meet UL Standard 60335-2-40 4th Edition.
- D. The completed unit assembly shall be UL listed.
- E. Drives are to be accessible through a tooled access hinged door assembly.
- F. The unit manufacturer shall install all power and control wiring.
- G. The supply air fan drive output shall be controlled by the factory installed main unit control system and drive status and operating speed shall be monitored and displayed at the main unit control panel.
- H. Drive shall be programmed and factory run tested in the unit.

1.19 Gas Heat

A. Integrated Economizers:

- i. Integrated, parallel modulating blade design type capable of simultaneous economizer and compressor operation.
- ii. Independent modules for vertical or horizontal return configurations shall be available. Vertical return modules shall be available as a factory installed option.
- iii. Damper blades shall be galvanized steel. Plastic or composite blades on intake or return shall not be acceptable.
- iv. Shall include all hardware and controls to provide free cooling with outdoor air when temperature and/or humidity are below setpoints.
- v. Shall be equipped with driven dampers for both the outdoor ventilation air and the return air for positive air stream control.
- vi. Shall be equipped with low-leakage dampers, not to exceed 2% leakage at 1 in. wg pressure differential.
- vii. Shall be capable of introducing up to 100% outdoor air.
- viii. Shall be equipped with a barometric relief damper capable of relieving up to 100% return air.
- ix. Shall be designed to close damper(s) during loss-of-power situations with spring return built into motor.
- x. Enthalpy sensor shall be provided as standard. Outdoor air sensor set point shall be adjustable and shall range from 40 to 100°F / 4 to 38°C. Additional sensor options shall be available as accessories.
- xi. The economizer controller shall also provide control of an accessory power exhaust unit function. Factory set at 70%, with a range of 0% to 100%.
- xii. The economizer shall maintain minimum airflow into the building during occupied period and provide design ventilation rate for full occupancy. A remote potentiometer may be used to override the damper set point.
- xiii. Dampers shall be completely closed when the unit is in the unoccupied mode.
- xiv. Economizer controller shall accept a 2-10Vdc CO2 sensor input for IAQ/DCV control. In this mode, dampers shall modulate the outdoor-air damper to provide ventilation based on the sensor input.
- xv. Actuator shall be direct coupled to economizer gear. No linkage arms or control rods shall be acceptable.
- xvi. Economizer controller shall provide indications when in free cooling mode, in the DCV mode, or the exhaust fan contact is closed.
- xvii. Economizer wire harness will have provision for smoke detector available in supply and return options.
- xviii. Shall provide fault detection and diagnostics (FDD) system in accordance with local code. Faults shall be communicated out on an alarm signal.

- B. Manual damper:
 - i. Manual damper package shall consist of damper, air inlet screen, and rain hood which can be preset to admit up to 50% outdoor air for year round ventilation.
- C. Condenser Coil Hail Guard Assembly
 - i. Shall protect against damage from hail.
 - ii. Shall be louvered style.
- D. Unit-Mounted, Non-Fused Disconnect Switch:
 - i. Switch shall be factory-installed, internally mounted.
 - ii. National Electric Code (NEC) and UL approved non-fused switch shall provide unit power shutoff.
 - iii. Shall be accessible from outside the unit.
 - iv. Shall provide local shutdown and lockout capability.
- E. Convenience Outlet:
 - i. Non-Powered convenience outlet.
 - ii. Outlet shall be powered from a separate 115-120v power source.
 - iii. A transformer shall not be included.
 - iv. Outlet shall be field-installed and internally mounted with easily accessible 115-v female receptacle.
 - v. Outlet shall include 15 amp GFI receptacle with independent fuse protection.
 - vi. Outlet shall be accessible from outside the unit.
- F. Propeller Power Exhaust:
 - i. Power exhaust shall be used in conjunction with an integrated economizer.
 - ii. Independent modules for vertical or horizontal return configurations shall be available.
 - iii. Horizontal power exhaust shall be mounted in return ductwork.
 - iv. Power exhaust shall be controlled by economizer controller operation. Exhaust fans shall be energized when dampers open past the 0-100% adjustable setpoint on the economizer control.
 - v. Capable of adjustable but constant volume.
- G. Dehumidification:
 - i. Shall utilize a dual-phase hot gas reheat control sequence.
 - ii. Shall be installed with a thermostat or space temperature sensor and an indoor relative humidity sensor, which shall connect to the Rooftop Unit Controller (RTU-C).
 - iii. Shall provide neutral air to the occupied space.
 - iv. Shall have two modes: Cooling and Dehumidification.
 - v. In cooling mode, the vapor refrigerant shall remove the heat to the outdoor coil, where heat is released outdoor. This allows the refrigerant to condense and become a subcooled liquid and the process shall repeat itself.
 - vi. In dehumidification mode, the refrigerant shall absorb heat via the indoor coil from the cooling area. The heat shall be carried via a parallel path to then release heat back into the cooling area allowing for the dehumidification.
 - vii. Modulate reheat coil refrigerant temperature via outdoor fan motor controller to achieve neutral air.
 - viii. Variable Frequency Drive shall allow the unit to operate with two stages of heat.
- H. Roof Curbs (Vertical):
 - i. Formed galvanized steel with wood nailer strip and shall be capable of supporting entire unit weight.
 - ii. Permits installation and securing of ductwork to curb prior to mounting unit on the curb.
- I. Return Air Enthalpy Sensor
 - i. Shall be used in conjunction with an outdoor air enthalpy sensor to provide differential enthalpy control.
- J. Indoor Air Quality (CO2) Sensor:
 - i. Shall be able to provide demand ventilation indoor air quality (IAQ) control.
 - ii. The IAQ sensor shall be available in duct mount, wall mount, or wall mount with LED display. The set point shall have adjustment capability.

K. Smoke detectors:

- i. Shall be a Four-Wire Controller and Detector.
- ii. Shall be environmental compensated with differential sensing for reliable, stable, and drift-free sensitivity.
- iii. Shall use magnet-activated test/reset sensor switches.
- iv. Shall have tool-less connection terminal access.
- v. Shall have a recessed momentary switch for testing and resetting the detector.
- vi. Controller shall include:
 - a. One set of normally open alarm initiation contacts for connection to an initiating device circuit on a fire alarm control panel.
 - b. Two Form-C auxiliary alarm relays for interface with rooftop unit or other equipment.
 - c. One Form-C supervision (trouble) relay to control the operation of the Trouble LED on a remote test/reset station.
 - d. Capable of direct connection to two individual detector modules.
 - e. Can be wired to up to 14 other duct smoke detectors for multiple fan shutdown applications.

L. Barometric Relief

- i. Shall include damper, seals, hard-ware, and hoods to relieve excess building pressure.
- ii. Damper shall gravity-close upon shutdown.

M. Time Guard:

- i. Shall prevent compressor short cycling by providing a 5-minute delay (± 2 minutes) before restarting a compressor after shutdown for any reason.
- ii. One device shall be required per compressor.

N. Standard Factory Installed Overflow Switch

- i. Switch shall monitor the condensate level in drain pan and stops compression operation when overflow conditions occur.

O. Access Panels:

- i. Hinges with $\frac{1}{4}$ turn fasteners shall be permanently attached.
- ii. Hinges shall be powder coated and made from stainless steel.

P. Refrigerant Detection System

- i. In the event of a detected refrigerant leak, the refrigerant leak detection sensor(s) will trigger the mitigation procedure that shuts off the compressor(s) and turns on the indoor blower motor.
- ii. In the event of a detected refrigerant leak, the system will display a fault code on the unitary controller. For DDC systems, 'A2L Event' will appear on the LCD module. For Non-DDC systems, a fault code of 40 will appear on the dual seven segment display



GENERAL TERMS OF LIMITED WARRANTY*

Rheem will furnish a replacement for any part of this product which fails in normal use and service within the applicable periods stated, in accordance with the terms of the limited warranty.

***For complete details of the Limited and Conditional Warranties, including applicable terms and conditions, contact your local contractor or the Manufacturer for a copy of the product warranty certificate.**

Compressor

Commercial ApplicationsFive (5) Years

Parts

Commercial ApplicationsOne (1) Year

Before proceeding with installation, refer to installation instructions packaged with each model, as well as complying with all Federal, State, Provincial, and Local codes, regulations, and practices.

Trademarks are property of their respective owners.

In keeping with its policy of continuous progress and product improvement, Rheem reserves the right to make changes without notice.

5600 Old Greenwood Road
Fort Smith, Arkansas 72908 • www.rheem.com

125 Edgeware Road, Unit 1
Brampton, Ontario • L6Y 0P5