
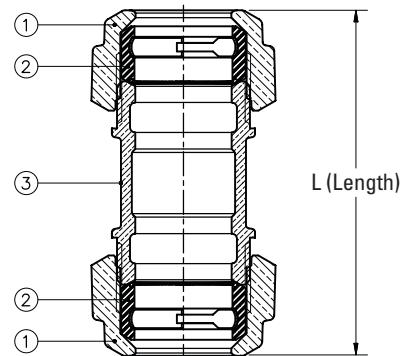



CTS Quick Compression Coupling

Product Specifications

Product Features

- For CTS tubing
- Quick Compression Coupling
- Sizes 3/4" – 2"
- Lead-free cast bronze
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Manufactured in compliance with ANSI/AWWA C800
- Certified to NSF/ANSI 61 and NSF/ANSI 372
- Temperature rating 100°F
- Pressure rating 150 psi
- Insert stiffeners required on all flexible plastic connections
- Imported

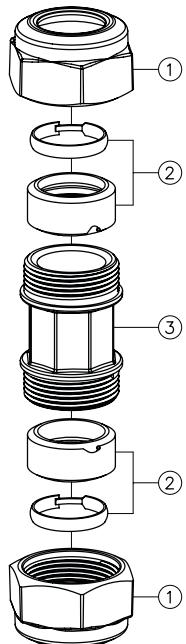

Material Specifications

No.	Parts	Materials	Qty.	Water Contact
1	Packing Nut	Cast Bronze C83600	2	N
2	Packing	Rubber (NBR) SN-719F (NBR Moulded with Spring Tip Gasket & Stainless Steel Gripper Ring)	2	Y
3	Nipple	Cast Bronze C87850	1	Y

Product Specifications

Model #	Description	Nominal Size		Dimension		
		CTS QJ	CTS QJ	L	W	H
PSXCTSQCF	LF 3/4 CTS X CTS QJ COUP-QUICK	3/4"	3/4"	3.520"	1.791"	1.575"
PSXCTSQCG	LF 1 CTS X CTS QJ COUP-QUICK	1"	1"	4.134"	2.205"	1.937"
PSXCTSQCJ	LF 1-1/2 CTS X CTS QJ COUP-QUICK	1-1/2"	1-1/2"	4.937"	2.618"	2.425"
PSXCTSQCK	LF 2 CTS X CTS QJ COUP-QUICK	2"	2"	5.681"	3.386"	2.917"
PSXCTSQCFG	LF 3/4X1 CTS COMP UNION-QUICK	3/4"	1"	3.736"	2.205"	1.937"
PSXCTSQCGJ	LF 1X1-1/2 CTS COMP UNION-QUICK	1"	1 1/2"	4.650"	2.618"	2.425"