

INSTALLATION, OPERATION & MAINTENANCE INSTRUCTIONS

1455 Kleppe Lane *Sparks, NV 89431-6467 *(775) 359-4712 *Fax (775) 359-7424 E-mail: haws@hawsco.com * website: www.hawsco.com

No. 2077567(7)

Model 6426 Lead Filter Kit

NOTE TO INSTALLER: Please leave this information with the Maintenance Department.

LIMITED WARRANTY

HAWS[®] warrants that all of its products are guaranteed against defective material or poor workmanship for a period of one year from date of shipment. HAWS liability under this warranty shall be discharged by furnishing without charge F.O.B. HAWS Factory any goods, or part thereof, which shall appear to the Company upon inspection to be of defective material or not of first class workmanship, provided that claim is made in writing to company within a reasonable period after receipt of the product. Where claims for defects are made, the defective part or parts shall be delivered to the Company, prepaid, for inspection. HAWS will not be liable for the cost of repairs, alterations or replacements, or for any expense connected therewith made by the owner or his agents, except upon written authority from HAWS, Sparks, Nevada. HAWS will not be liable for any damages caused by defective materials or poor workmanship, except for replacements, as provided above. Buyer agrees that Haws has made no other warranties either expressed or implied in addition to those above stated, except that of title with respect to any of the products or equipment sold hereunder and that HAWS shall not be liable for general, special, or consequential damages claimed to arise under the contract of sale. The drinking fountain manufactured by HAWS is warranted to function if installation and maintenance instructions provided are adhered to. The units also must be used for the purpose for which they were intended.

NO OTHER WARRANTIES EXPRESSED OR IMPLIED ARE AUTHORIZED, PROVIDED OR GIVEN BY HAWS.

SHOULD YOU EXPERIENCE DIFFICULTY WITH THE INSTALLATION OF THIS MODEL, PLEASE CALL:

1-800-766-5612

FOR PARTS CALL:

1-800-758-9378

(U.S.A. AND CANADA ONLY) MONDAY-THURSDAY: 6:00 A.M. – 4:00 P.M. PST FRIDAY: 6:00 A.M – 1:00 P.M. PST

10/09 Model 6426 Page 1 of 3


RECOMMENDED TOOLS: Tubing cutter, adjustable wrench, screwdriver, and a knife.

LOCATION OF UNIT: For maximum protection, filter should be installed as close to bubbler as is feasible. Filter should be located in an area, which is accessible for occasional replacement.

PLUMBING CONNECTIONS: Fittings are not supplied for connection to $\frac{1}{4}$ " or $\frac{3}{8}$ " diameter copper or plastic tubing.

MAINTENANCE: This filter is rated for a nominal capacity of 500 gallons. This approximates two years of light usage, 6 months to one year of average usage and 3 to 6 months of heavy usage. Actual life depends upon local water conditions. In areas where sediment is a problem, we recommend using additional sediment pre-filter.

10/09 Model 6426 Page 2 of 3

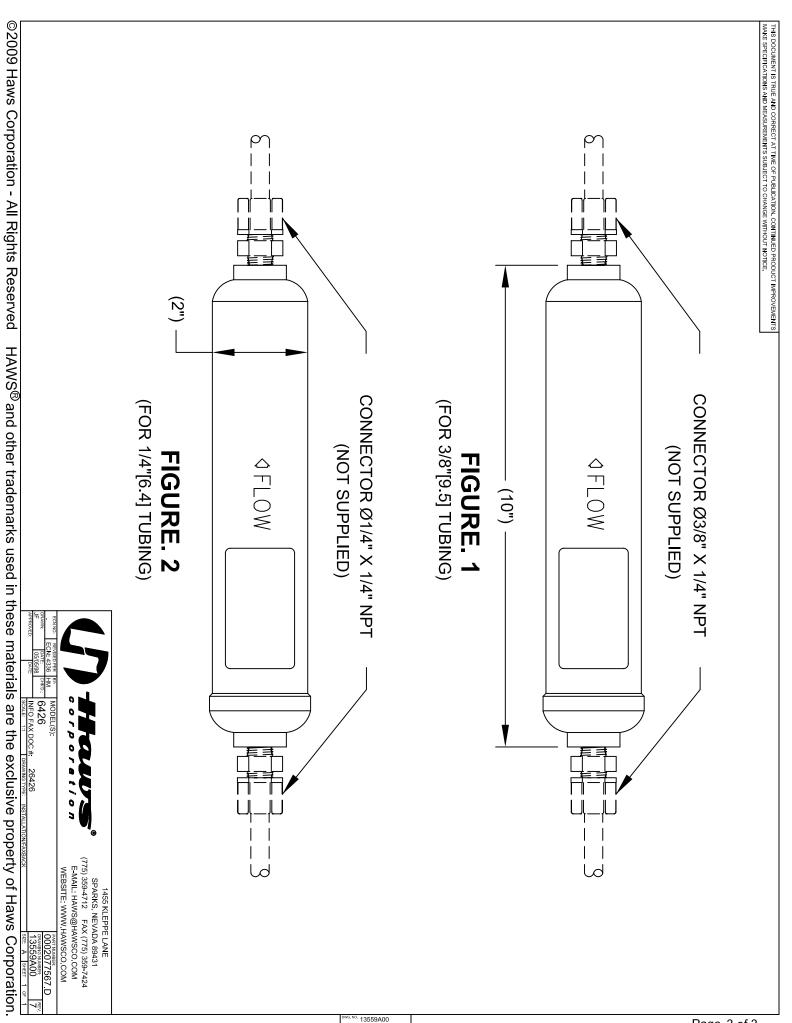

Page 3 of 3