


# PLUMBERS FELT *Non-Adhesive*

## Non-Adhesive Plumbers Felt

- Used in pipe hangers and pipe clamps
- Isolates pipes and stops electrolysis
- Used to wrap DWV, especially between floors to close off openings
- reduces pipe movement and vibration

Product#	Dimensions	Package Quantity
#165	3/16"X2"X25'	24 rolls per case
#175	1/4"X2"X25'	24 rolls per case

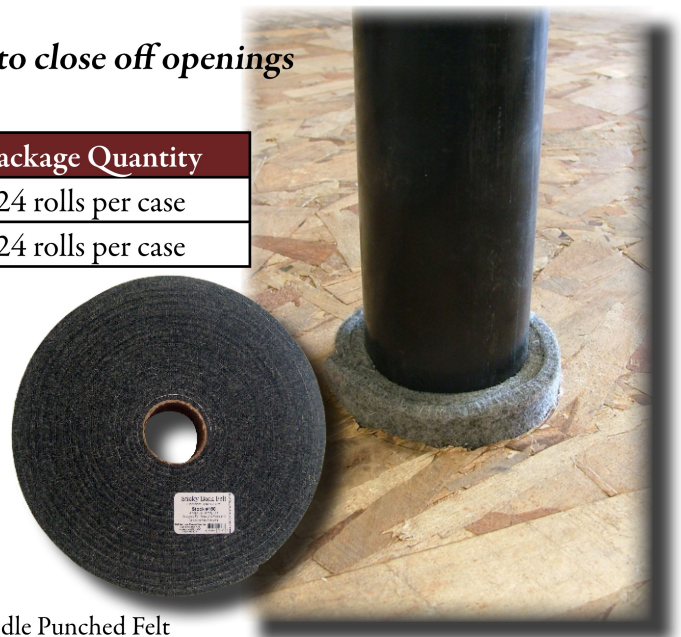

Needle Punched Felt

Properties	S.A.E.	Felt Specifications	#F-26
Color	Grey	Grey	Grey
Thickness/Nominal	1/8"	3/16"	1/4"
Thickness/Limits In.	.105-.1450	.1670-.2070	.230-.270
Weight/oz. per Sq. yard	15-19	23-27	32-36
Density 1% specific gravity	15.4	15.4	15.4
Actual Wool content	20%	20%	20%
Carbontet/Soluable Max.	8%	8%	8%
Water Soluable Max.	6%	6%	6%
Combined Carbontet/Water Soluble	14%	14%	14%
Ash Max.	5%	5%	5%
Tensile Strength Min.	not measurable	not measurable	not measurable
Splitting Resistance Min.	not measurable	not measurable	not measurable

