

Frank Pattern™ SHOWER DRAIN 20SD

| Part Number | Description |
|-------------------|--|
| 20SD | Shower Drain, Instant Set®, Ø3.5" strainer, Ø2" outlet |
| Replacement Parts | |
| Part Number | QTY |
| 20SD-030 | Shower Drain Screen & Screws |
| | 1 |

SPECIFICATION

Recommended for use on concrete floors to facilitate drainage. Drain unit consists of cast iron main body, top & base ring, stainless steel grate, and stainless steel fasteners.

DESIGN FEATURES

- Cast iron main body assembly with corrosion resistant coating
- Instant Set® drain pipe attachment. No additional hardware required
- Top with integral membrane clamp ring
- Removable stainless steel grate for drain cleaning and replacement

INSTALLATION

1. Position drain assembly in place with drain pipe connected prior to pouring concrete.
2. Instant Set® joint clamps on outside of drain pipe. Remove top flange and simply slide over pipe. Evenly tighten 3 internal bolts with rubber washer seals, tighten to 20 in-lbs. Re-install top flange and secure bolts.
3. Pour concrete flooring to level of grate.

COMPLIANCES/LISTINGS

- Compliant to ASME A112.6.3 standards listed in IAPMO File: 2786
- Uniform Plumbing Code (UPC®)



3689 Arrowhead Drive, Carson City, NV 89706
Phone (800) 854-3215 Fax (800) 243-1777

E-mail sales@lspproducts.com


Website www.lspproducts.com

Content matter is subject to change at any time. It is the user's responsibility to ensure the most updated revisions are obtained.

Revised 05/2017

DIMENSIONS

Side View

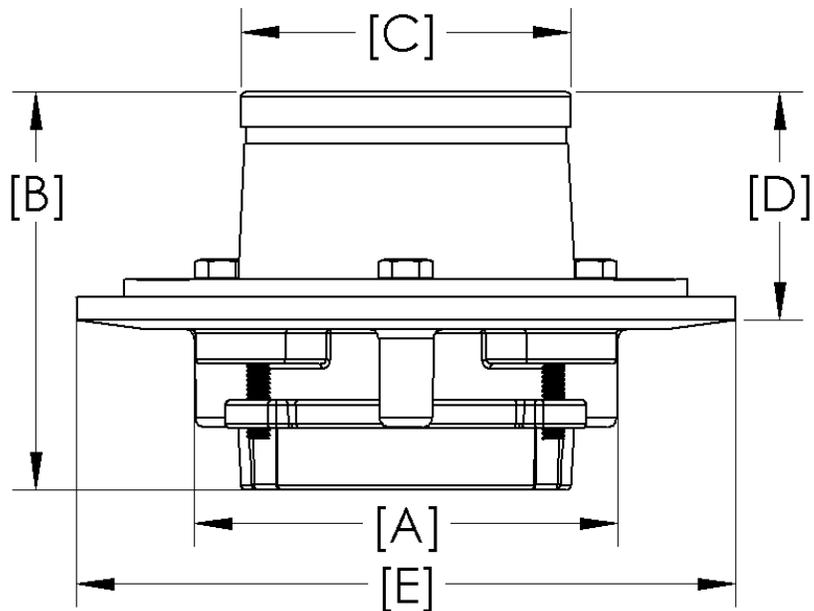

| Part Number | Nominal Pipe Connection | Dimensions (Inches) | | | | |
|-------------|-------------------------|---------------------|-------|-------|--------|---|
| | | A | B | C | D | E |
| 20SD | 2" | 4-1/2 | 4-1/4 | 3-1/2 | 2-7/16 | 7 |

| Product Submittal | |
|-------------------|----------|
| Job Name: | |
| Date: | |
| Part Number | Quantity |
| | |
| | |
| Architect: | |
| Contractor: | |