S3960

⋖

NONE

9-19-85

9

9

2

FIGURE NUMBER AND CHANGE WITHOUT NOTICE

DIMENSIONS ARE SUBJECT TO MANUFACTURERS TOLERANCE

SUPERSEDED OR VOID DATA

WE CAN ASSUME NO RESPONSIBILITY FOR USE OF

DRAWING NUMBER



LOCATION

ROOF-CEPTOR® INDIRECT WASTE DRAIN

7 1/4"(185) TOP - MEDIUM DEPTH RECEPTORS

FUNCTION: Recommended for use in roof areas to receive waste water from air conditioning units, cooling towers and other mechanical equipment installed on the roof. The solid water dam prevents storm water from entering the waste line. The large vandal proof dome bottom strainer provides ample drainage and prevents entry of debris.

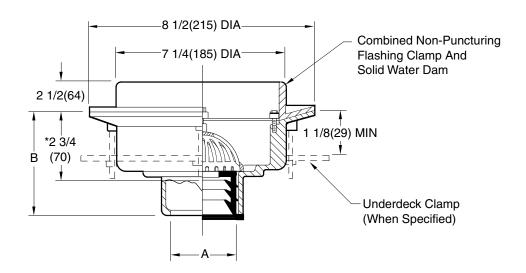


Fig. 3960C . . . CAULK OUTLET Fig. 3960Y . . . NO-HUB OUTLET

*This Dimension to Internal Stop of Speedi-Set Gasket recommended deck openings: with suffix -R - 9"(230) less suffix -R - 7 3/4"(195)

A SIZE	02 (50)	03 (80)	04 (100)
В	and Spee	for Caulk, di-Set. for Threac	

REGULARLY FURNISHED:

Duco Cast Iron Receptor with Solid Water Dam and Cast Iron Dome Bottom Strainer Secured with Stainless Steel Vandal Proof Screws.

VARIATIONS:

Extension -E
L Speedi-Set Service Weight
LXH Speedi-Set Extra Heavy
Roof Sump Receiver -R
Underdeck Clamp-UDC
T Threaded Outlet

OPTIONAL MATERIALS:

All Galvanized -G

NOTE: Dimensions shown in parentheses are in millimeters.

C B A	04/22/04 8-27-96 7-26-94	Added UDC to Variations Added Millimeters Submittal Update	JJ EMB EMB	CL BS BS	VOLUME CUBIC FEET	FIGURE NUMBER 3960
REV.	DATE	DESCRIPTION	BY	CKD. BY		