


SILENT CHECK VALVES 1400*

WAFER STYLE • SEMI-STEEL BODY

125 LB. CLASS • BRONZE TRIM**

Intended for liquid
service only.

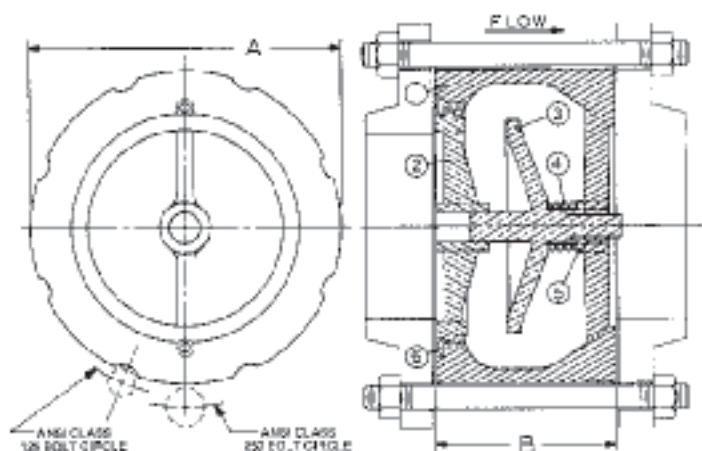

PRESSURE TEMPERATURE RATINGS				
TEMP. DEG. F.	MAX., NON-SHOCK SERVICE PRESS.			
	ANSI B16.1 FLG. RATINGS			
	125 LB CLASS		250 LB CLASS	
	2" - 12"	14" - 42"	2" - 12"	11" - 42"
0° - 150°	200	150	400	300
200°	190	135	370	280

TEST PRESSURE	300	230	600	450
------------------	-----	-----	-----	-----

NOTE: Stainless Steel trim recommended for temperatures
180° - 200° F.

* International Valve

**We reserve the right to substitute stainless steel trim.

MATERIAL LIST

NO.	PART	MATERIAL
1	Body	Cast Iron
2	Seat	Bronze
3	Plug	Bronze
4	Spring	Stainless Steel
5	Bushing	Bronze
6	Screw	Stainless Steel

DIMENSIONS - INCHES / MILIMETERS					
Units	Size	Weight Lbs.	A	B	C _v
Inches mm	2 50.80	6	4.25 107.95	2.63 66.68	66
Inches mm	2 1/2 63.50	7	5.00 127.00	2.88 73.03	88
Inches mm	3 76.20	12	5.75 146.05	3.13 79.38	130
Inches mm	4 101.60	18	7.00 177.80	4.00 101.60	228
Inches mm	5 127.00	27	8.38 212.73	4.75 120.65	350
Inches mm	6 152.40	42	9.75 247.65	5.50 139.70	520
Inches mm	8 203.20	85	13.38 339.73	6.50 165.10	900
Inches mm	10 254.00	146	16.00 406.40	8.25 209.55	1450

DIMENSIONS - INCHES / MILIMETERS					
Units	Size	Weight Lbs.	A	B	CV
SIZES 2" THRU 6" ARE COMBINATION ANSI CLASS 125 AND 250, VALVES USE ANSI CLASS 125					
Inches mm	8 203.20	86	13.38 339.73	6.50 165.10	900
Inches mm	10.00 254.00	137	16.00 406.40	8.25 209.55	1450

Rev. 4

INNOVATION IN EVERY VALVE



MILWAUKEE VALVE

The information presented on this sheet is correct at the time of publication. Milwaukee Valve reserves the right to change design, and/or material specifications without notice. For the most current information access www.milwaukeevalve.com

www.milwaukeevalve.com