



PVC SCHEDULE 40 EDITION

www.kbico.com



INDEX

Schedule Ball 40 Valves

Commercial Ball Valves	3
Residential Ball Valves	3
Custom Valves	3

Gate Valves

Gate Valves	4
-------------------	---

Check Valves

King Spring Check Valves	4-5
King Swing Check Valves	5
Compression Check Valves	5
Unionized Check Valves	6
Foot Valves	6
Low-Profile Check Valves	6

Under Risers Check Valves

Adjustable Check Valves	6-7
-------------------------------	-----

Supply Valves

Supply Valves	7
---------------------	---

Repair Fittings

Quik-Fix™	7
Snap-Fix™	7

Compression Fittings

K-loc™ Compression Adapters	7
Compression Couplings	7-8
Compression Adapters	8
Compression Tees	8

Unions

Unions	8
--------------	---

Triple Swing Assembly

Triple Swing Assemblies	9
-------------------------------	---

Replacement Parts

Replacement Handles.....	9
Union O'rings	9
Replacement Gasket	9


Glossary

Catalog Navigation	10
Organization	10
Column Header Information	10
Product Configuration.....	10
KBI's Quality Policy	11
Limited Lifetime Warranty	11
Order and Freight Policy	12
Standards & Specifications	12
Recommendations for Installers & Users	13
Important	13
Not for Use with Compressed Air or Gases	14
Configuration Description	14
Part Number Notations	14
Additional Part Number Information	15
Notes	15

Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

Commercial Ball Valve

SOCKET




WLT-0500-S	1/2"		36
WLT-0750-S	3/4"		24
WLT-1000-S	1"		18
WLT-1250-S	1 1/4"		8
WLT-1500-S	1 1/2"		6
WLT-2000-S	2"		4

Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

Commercial Ball Valve


THREADED



WLT-0500-T	1/2"		36
WLT-0750-T	3/4"		24
WLT-1000-T	1"		18
WLT-1250-T	1 1/4"		8
WLT-1500-T	1 1/2"		6
WLT-2000-T	2"		4

Residential Ball Valve


SOCKET



EBV-0500-S	1/2"		48
EBV-0750-S	3/4"		36
EBV-1000-S	1"		24
EBV-1250-S	1 1/4"		8
EBV-1500-S	1 1/2"		8
EBV-2000-S	2"		6

Residential Ball Valve


THREADED



EBV-0500-T	1/2"		48
EBV-0750-T	3/4"		36
EBV-1000-T	1"		24
EBV-1250-T	1 1/4"		8
EBV-1500-T	1 1/2"		8
EBV-2000-T	2"		6

Residential Ball Valve


SOCKET with Viton O'rings



EBV-0500-SV	1/2"		48
EBV-0750-SV	3/4"		36
EBV-1000-SV	1"		24
EBV-1250-SV	1 1/4"		8
EBV-1500-SV	1 1/2"		8
EBV-2000-SV	2"		6

Residential Ball Valve


THREADED with Viton O'rings



EBV-0500-TV	1/2"		48
EBV-0750-TV	3/4"		36
EBV-1000-TV	1"		24
EBV-1250-TV	1 1/4"		8
EBV-1500-TV	1 1/2"		8
EBV-2000-TV	2"		6

Single Union Ball Valve


SOCKET and SPIGOT



WSU-1520-S	1 1/2"+2" x 1 1/2"+2"		8
------------	-----------------------	--	---

BCX Ball and Check Valve

SOCKET



BCX-1500-S	1 1/2"		4
BCX-2000-S	2"		2



Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

Gate Valve SOCKET



GVP-0500-S	1/2"		24
GVP-0750-S	3/4"		20
GVP-1000-S	1"		16
GVP-1250-S	1 1/4"		8
GVP-1500-S	1 1/2"		6
GVP-2000-S	2"		4


Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

Gate Valve THREADED




GVP-0500-T	1/2"		24
GVP-0750-T	3/4"		20
GVP-1000-T	1"		16
GVP-1250-T	1 1/4"		8
GVP-1500-T	1 1/2"		6
GVP-2000-T	2"		4

King Spring Check Valve 1/2 LB SPRING - SOCKET




KC-0500-S	1/2"		60
KC-0750-S	3/4"		36
KC-1000-S	1"		24
KC-1250-S	1 1/4"		12
KC-1500-S	1 1/2"		8
KC-2000-S	2"		6

King Spring Check Valve 1/2 LB SPRING - THREADED




KC-0500-T	1/2"		60
KC-0750-T	3/4"		36
KC-1000-T	1"		24
KC-1250-T	1 1/4"		12
KC-1500-T	1 1/2"		8
KC-2000-T	2"		6

King Spring Check Valve CLEAR - 1/2 LB SPRING - SOCKET




KCC-0500-S	1/2"		60
KCC-0750-S	3/4"		36
KCC-1000-S	1"		24
KCC-1250-S	1 1/4"		12
KCC-1500-S	1 1/2"		8
KCC-2000-S	2"		6

King Spring Check Valve CLEAR - 1/2 LB SPRING - THREADED




KCC-0500-T	1/2"		60
KCC-0750-T	3/4"		36
KCC-1000-T	1"		24
KCC-1250-T	1 1/4"		12
KCC-1500-T	1 1/2"		8
KCC-2000-T	2"		6

King Spring Check Valve 2 LB SPRING - SOCKET



KC2-0500-S	1/2"		60
KC2-0750-S	3/4"		36
KC2-1000-S	1"		24
KC2-1250-S	1 1/4"		12
KC2-1500-S	1 1/2"		8
KC2-2000-S	2"		6

King Spring Check Valve 2 LB SPRING - THREADED




KC2-0500-T	1/2"		60
KC2-0750-T	3/4"		36
KC2-1000-T	1"		24
KC2-1250-T	1 1/4"		12
KC2-1500-T	1 1/2"		8
KC2-2000-T	2"		6

Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

King Spring Check Valve


5 LB SPRING - SOCKET



BPC-0500-S	1/2"		60
BPC-0750-S	3/4"		36
BPC-1000-S	1"		24
BPC-1250-S	1 1/4"		12
BPC-1500-S	1 1/2"		8
BPC-2000-S	2"		6

King Swing Check Valve


SOCKET



KSC-0500-S	1/2"		12
KSC-0750-S	3/4"		12
KSC-1000-S	1"		12
KSC-1250-S	1 1/4"		9
KSC-1500-S	1 1/2"		6
KSC-2000-S	2"		4
KSC-3000-S	3"		2
KSC-4000-S	4"		1

King Swing Check Valve


CLEAR - SOCKET



KSCC-0500-S	1/2"		12
KSCC-0750-S	3/4"		12
KSCC-1000-S	1"		12
KSCC-1250-S	1 1/4"		9
KSCC-1500-S	1 1/2"		6
KSCC-2000-S	2"		4
KSCC-3000-S	3"		2
KSCC-4000-S	4"		1

PVC Swing Check Valve

COMPRESSION




KSC-1250-C	1-1/4"		6
KSC-1500-C	1-1/2"		4
KSC-2000-C	2"		2
KSC-3000-C	3"		1

Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

King Spring Check Valve


5 LB SPRING - THREADED



BPC-0500-T	1/2"		60
BPC-0750-T	3/4"		36
BPC-1000-T	1"		24
BPC-1250-T	1 1/4"		12
BPC-1500-T	1 1/2"		8
BPC-2000-T	2"		6

King Swing Check Valve


THREADED



KSC-0500-T	1/2"		12
KSC-0750-T	3/4"		12
KSC-1000-T	1"		12
KSC-1250-T	1 1/4"		9
KSC-1500-T	1 1/2"		6
KSC-2000-T	2"		4

King Swing Check Valve


CLEAR - THREADED



KSCC-0500-T	1/2"		12
KSCC-0750-T	3/4"		12
KSCC-1000-T	1"		12
KSCC-1250-T	1 1/4"		9
KSCC-1500-T	1 1/2"		6
KSCC-2000-T	2"		4

Clear PVC Swing Check Valve

COMPRESSION




KSCC-1250-C	1-1/4"		6
KSCC-1500-C	1-1/2"		4
KSCC-2000-C	2"		2
KSCC-3000-C	3"		1



Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

King Swing Check Valve

UNIONIZED - SOCKET




KSC-0500-SU	1/2"		12
KSC-0750-SU	3/4"		12
KSC-1000-SU	1"		12
KSC-1250-SU	1-1/4"		6
KSC-1500-SU	1-1/2"		6
KSC-2000-SU	2"		2
KSC-3000-SU	3"		1

Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

King Swing Check Valve


UNIONIZED - THREADED



KSC-0500-TU	1/2"		12
KSC-0750-TU	3/4"		12
KSC-1000-TU	1"		12
KSC-1250-TU	1-1/4"		6
KSC-1500-TU	1-1/2"		6
KSC-2000-TU	2"		2
KSC-3000-TU	3"		1

King Swing Check Valve


CLEAR UNIONIZED - SOCKET



KSCC-0500-SU	1/2"		12
KSCC-0750-SU	3/4"		12
KSCC-1000-SU	1"		12
KSCC-1250-SU	1-1/4"		6
KSCC-1500-SU	1-1/2"		6
KSCC-2000-SU	2"		2
KSCC-3000-SU	3"		1

King Swing Check Valve


CLEAR UNIONIZED - THREADED



KSCC-0500-TU	1/2"		12
KSCC-0750-TU	3/4"		12
KSCC-1000-TU	1"		12
KSCC-1250-TU	1-1/4"		6
KSCC-1500-TU	1-1/2"		6
KSCC-2000-TU	2"		2
KSCC-3000-TU	3"		1

Single Union Check Valve


CLEAR - SOCKET



PCC-1520-S	1 1/2" x 1 1/2"		8
------------	-----------------	--	---

Foot Valve


THREADED



KFV-0500-T	1/2"		36
KFV-0750-T	3/4"		36
KFV-1000-T	1"		18
KFV-1250-T	1 1/4"		8
KFV-1500-T	1 1/2"		6
KFV-2000-T	2"		4

Lo-Profile Swing Check Valve


SOCKET



KSL-1000-S	1"		18
KSL-1250-S	1 1/4"		12
KSL-1500-S	1 1/2"		12
KSL-2000-S	2"		8

Adjustable Check Valve

FIPT x FIPT




UVC-0500-FF	1/2"		100
UVC-0750-FF	3/4"		60
UVC1000-FF	1"		40

Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

Adjustable Check Valve

VARIABLE

WCV-0750-MF	1/2"		60
WCV-1000-MF	3/4"		36



Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

45° Hose Bibb

MIPT x MIPT

WHBM-0500-T	1/2"		36
WHBM-0750-T	3/4"		36



Compression Stop Valve

SOCKET

SCP-0500-S	1/2"		36
SCP-0750-S	3/4"		36



Compression Stop and Waste Valve

SOCKET


SWP-0500-S	1/2"		36
SWP-0750-S	3/4"		36



Quik-Fix™ Telescopic Repair Coupling

SOCKET x SPIGOT

QF-0500	1/2"		36
QF-0750	3/4"		24
QF-1000	1"		18
QF-1250	1 1/4"		12
QF-1500	1 1/2"		12
QF-2000	2"		8
QF-2500	2 1/2"		4
QF-3000	3"		3
QF-4000	4"		2
QF-6000	6"		1



Snap-Fix™

SNAP-LOC


SNX-0500-B	1/2"		48
SNX-0750-B	3/4"		36
SNX-1000-B	1"		36



Compression Coupling

CTS

CCC-0500	1/2"		48
CCC-0750	3/4"		30
CCC-1000	1"		24
CCC-1250	1 1/4"		18
CCC-1500	1 1/2"		12
CCC-2000	2"		6



Compression Lock Adapter

CTS x IPS

CCL-0750-S	3/4"		48
CCL-1000-S	1"		36
CCL-1250-S	1 1/4"		24
CCL-1215-S	1 1/4" x 1 1/2"		24
CCL-1500-S	1 1/4"		18
CCL-1512-S	1 1/2" x 1 1/4"		18
CCL-2000-S	2"		6






Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

Compression Coupling


CTS



CPC-0500	1/2"		30
CPC-0750	3/4"		24
CPC-1000	1"		18
CPC-1250	1 1/4"		12
CPC-1500	1 1/2"		15
CPC-2000	2"		12
CPC-2500	2 1/2"		5
CPC-3000	3"		4
CPC-4000	4"		3
CPC-6000	6"		1

Compression Tee


CTS



CCT-0500	1/2"		36
CCT-0750	3/4"		24
CCT-1000	1"		18
CCT-1250	1 1/4"		10
CCT-1500	1 1/2"		8
CCT-2000	2"		5

Compression Tee


SOCKET



CPT-0500-S	1/2"		24
CPT-0750-S	3/4"		20
CPT-1000-S	1"		12
CPT-1250-S	1 1/4"		8
CPT-1500-S	1 1/2"		6
CPT-2000-S	2"		5

Union


SOCKET



WU-0500-S	1/2"		48
WU-0750-S	3/4"		24
WU-1000-S	1"		18
WU-1250-S	1 1/4"		12
WU-1500-S	1 1/2"		12
WU-2000-S	2"		6

Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------


Compression Adapter



CPA-0500	1/2"		48
CPA-0750	3/4"		36
CPA-1000	1"		24
CPA-1250	1 1/4"		18
CPA-1500	1 1/2"		16
CPA-2000	2"		12

Compression Reducing Tee


THREADED



CRT-0750-T	3/4"		20
------------	------	--	----

Compression Tee

THREADED



CPT-0500-T	1/2"		24
CPT-0750-T	3/4"		20
CPT-1000-T	1"		12
CPT-1250-T	1 1/4"		8
CPT-1500-T	1 1/2"		6
CPT-2000-T	2"		5

Union

THREADED




WU-0500-T	1/2"		48
WU-0750-T	3/4"		24
WU-1000-T	1"		18
WU-1250-T	1 1/4"		12
WU-1500-T	1 1/2"		12
WU-2000-T	2"		6

Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

Triple Swing Assembly

MIPT x MIPT

WSA-0500-TT	1/2"		60
WSA-0750-TT	3/4"		50
WSA-1000-TT	1"		25



Part Number	Size	Bag Qty	Case Qty
-------------	------	---------	----------

Union O'ring

4 PACK


U-0571-ORBG	1/2", 3/4", 1"		1
U-1252-ORBG	1-1/4", 1-1/2", 2"		1



Replacemenet Handle

BLUE


EBV-0500-BHL	1/2"		1
EBV-0750-BHL	3/4"		1
EBV-1000-BHL	1"		1
EBV-1250-BHL	1 1/4"		1
EBV-1500-BHL	1 1/2"		1
EBV-2000-BHL	2"		1



Replacement Handle

BLUE


LT-0500-BHL	1/2"		1
LT-0750-BHL	3/4"		1
LT-1000-BHL	1"		1
LT-1250-BHL	1 1/4"		1
LT-1500-BHL	1 1/2"		1
LT-2000-BHL	2"		1



Replacemenet Handle

RED


EBV-0500-RHL	1/2"		1
EBV-0750-RHL	3/4"		1
EBV-1000-RHL	1"		1
EBV-1250-RHL	1 1/4"		1
EBV-1500-RHL	1 1/2"		1
EBV-2000-RHL	2"		1



Replacement Handle

RED

LT-0500-RHL	1/2"		1
LT-0750-RHL	3/4"		1
LT-1000-RHL	1"		1
LT-1250-RHL	1 1/4"		1
LT-1500-RHL	1 1/2"		1
LT-2000-RHL	2"		1



Replacement Gasket

CPC-0500-GSK-BG	1/2"	2	60
CPC-0750-GSK-BG	3/4"	2	60
CPC-1000-GSK-BG	1"	2	60





CATALOG NAVIGATION

KBI's CPVC Pressure Fittings catalog has been arranged for easy use in selection of desired products according to part number, size, packaging and pricing information. Additional information on individual product dimensions can be found in KBI's publication.....

ORGANIZATION

Products in this catalog are listed by columns, by type and configuration. Similar configuration types are grouped together such as Tees, then Elbows, etc.

COLUMN HEADER INFORMATION

Each product column header label identifies the following product particulars:

Part Number	The number used to order that part.
Size	Nominal diameter of pipe with which the fitting is to be used. NOTE: Fittings may be same size (<i>only one size designation</i>) or reducing (<i>multiple sizes designated</i>).
Bag Quantity	The quantity of parts packaged in an individual bag.
Box Quantity	The total quantity of parts contained in individual boxes.
Price Each	The designated list price of the product.

PRODUCT CONFIGURATION

Each product group or configuration is headed by the product's name and abbreviated configuration description of the fitting outlet configuration. Configuration descriptions are defined on the following page. Line drawing illustrations are general representations of the fittings in the group, but may not be an exact depiction of all configurations listed. Line drawings are correlated to the configuration description. The drawing is read left to right for Elbow and Adapter configurations. Tees have an additional outlet branch and are read left to right (*run*) then top (*branch*). Drawings for Wyes and Crosses are read top to bottom then left to right and bushings drawings are read as outside x inside configuration. The configuration description also correlates to the size designation. As with nominal size designations, only the description is given when all outlets are the same. Reducing sizes list run configuration x branch configuration.

KBI's QUALITY POLICY

King Bros. Industries (*Kbi*) is committed to providing quality products to satisfy the needs and expectations of our customers. Kbi is committed to continual improvement of our products and processes. Kbi documents, maintains, and continually improves its quality objectives. Kbi's quality management system is implemented through the use of its Quality Manual, Quality System and related process procedures and instructions.

The quality management system is an integral part of Kbi's management and production processes. It is not a separate element or function; each and every aspect of the day-to-day operations of the company critical to quality shall be conducted in accordance with the Quality Manual. Every employee is expected to understand the purpose of the quality management system and work towards our quality commitment to products that meet specification and customer satisfaction.

LIMITED LIFETIME WARRANTY

KBI warrants to the original owner of the property in which its products are installed all of its products to be free from defects in workmanship or materials for as long as the original owner owns the property.

If any such product is found to be defective during the warranty period, the product will be repaired or replaced free of charge by KBI. Should this occur, KBI should be contacted immediately either by telephone or in writing for return authorization and/or instructions as to the next step in procedure. Please note that all products reported to be defective must be made available to KBI for inspection and analysis to determine the cause.

This Lifetime Limited Warranty shall be in force for as long as products are used for the intended purposes for which they were manufactured and in conformance with industry established installation, operation and scheduled maintenance specifications. The Lifetime Limited Warranty does not cover damage caused by workmanship of the installer, freezing water conditions, any application involving compressed air or gas, other specialized applications, vandalism, sabotage, floods, earthquakes, fires, or any other event beyond the control of KBI.

The sole remedy under this Lifetime Limited Warranty shall be the repair or replacement of any defective fittings as described above. In no event shall KBI be liable for incidental or consequential damages or for labor costs or other expenses required to replace defective products or to repair any damage resulting from their use.

THIS WARRANTY IS IN LIEU OF, AND KBI DISCLAIMS, ALL OTHER WARRANTIES EXPRESS OR IMPLIED INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR USE.

KBI is always concerned about both our products and our relationship with our customers and/or contractors. We welcome opportunities to work together in the investigation of all possible product failures and/or discrepancies.



KBI's ORDER and FREIGHT POLICY

KBI has absorbed significant fuel surcharges passed on by our own freight providers over the last year. We are now forced to act by raising our prepaid freight limits accordingly. The raising of our prepaid freight allowance will enable us to prevent passing on fuel surcharges to our own customers. It should be noted that KBI has not increased prepaid freight levels nationally in over fifteen years.


FOB \$1,000. for all US orders for all product categories.

FOB \$2,000. for all International orders for all product categories.

Minimum order \$100.00 net invoice.

STANDARDS & SPECIFICATIONS

Standards provide greater assurance of product performance and consistency, and are available to assist design engineers in system specification. The most frequently referenced industry standards for plastic piping systems are ASTM Standard Specifications and Practices. Along with ASTM Standards, additional product specifications and certifications form the basis of product conformance to which KBI's products are manufactured.

ASTM F 1960	Standard for PEX cold expansion Insert Fittings W/PEX expansion Ring.
ASTM F 1974	Standard for PEX-AL-PEX Insert Fittings.
ASTM F 1807	Standard for PEX Insert Fittings using Copper CrimpRing.
ASTM D 2846	CPVC Plastic Pipe Fittings, CTS.
ASTM D 2466	Poly (Vinyl Chloride) (PVC) Plastic Pipe Fittings, Schedule 40.
ASTM D 1784	Rigid Poly (Vinyl Chloride) (PVC) Compounds and Chlorinated Poly (Vinyl Chloride) (CPVC) Compounds.
ASTM D 2609	Plastic Insert Fittings for Polyethylene (PE) Plastic Pipe.
	National Sanitation Foundation (NSF) Standard 61 and/or 14 Plastic Fittings for Potable Water.
Material	KBI's Schedule 40 Fittings are produced from PVC Type I, Cell Classification 12454.
Fabrication Fittings	KBI's Fabricated Fittings conform to KBI's Special Engineering Specifications.

RECOMMENDATIONS FOR INSTALLERS & USERS

Plastic piping systems should be ENGINEERED, INSTALLED, and OPERATED in accordance with ESTABLISHED DESIGN AND ENGINEERING STANDARDS AND PROCEDURES for plastic piping system. PRIOR TO ASSEMBLY, all piping system components should be inspected for damage or irregularities. Mating components should be checked to assure that tolerances and engagements are compatible. Do not use any components that appear irregular or do not fit properly. Contact the appropriate manufacturer of the component product in question to determine usability. Consult all applicable codes and regulations for compliance prior to installation.

SOLVENT WELD CONNECTIONS - Use a quality grade of primer and solvent cement formulated for the type of connection, with the CORRECT SIZE APPLICATOR. Read and follow all of the solvent cement MANUFACTURER'S APPLICATION AND CURE TIME INSTRUCTIONS THOROUGHLY.

BEFORE APPLYING PRIMER AND CEMENT, appropriate safety precautions should be taken. Primer and Cement should be stored in the shade between 40°F and 110°F. Eliminate all ignition sources. Avoid breathing of vapors. Use only with adequate ventilation; explosion-proof general mechanical ventilation or local exhaust is recommended to maintain vapor concentrations below recommended exposure limits. In confined or partially enclosed areas, a NIOSH-approved organic respirator with full face-piece is recommended. Containers should be kept tightly closed when not in use, and covered as much as possible when in use. Avoid frequent contact with skin; wearing PVA coated protective gloves and impervious apron are recommended. Avoid any contact with eyes; splash-proof chemical goggles are recommended.

THREADED CONNECTIONS - Use a quality grade thread sealant. WARNING: SOME PIPE JOINT COMPOUNDS OR TEFLON PASTES MAY CONTAIN SUBSTANCES THAT COULD CAUSE STRESS CRACKING TO PLASTIC. Please follow the sealant manufacturer's application/installation instructions. Choice of sealant is at the discretion of the installer. One to two turns beyond FINGER TIGHT is generally all that is required to make a sound plastic threaded connection. Unnecessary OVER TIGHTENING will cause DAMAGE TO BOTH PIPE AND FITTING.

IMPORTANT

WATER HAMMER - KBI recommends that all PVC and CPVC plastic piping systems be designed and constructed to AVOID EXCESS WATER HAMMER. Water hammer can cause damage and failure to pipe, valves and fittings within the piping system.

PLEASE NOTE - When temperatures rise above 73°F, the tensile strength of thermoplastics decreases, thereby de-rating the pipe or fitting Maximum Internal Pressure. When the temperature falls below 73°F, the tensile strength of thermoplastics increases, however, the impact strength decreases. Maximum operating temperature for PVC piping systems should not exceed 140°F. Maximum operating temperature for CPVC piping systems should not exceed 200°F.

CAUTION - KBI DOES NOT RECOMMEND the use of thermoplastics piping products for systems to transport or store compressed air or gasses, or the testing of thermoplastic piping systems with compressed air or gasses above or below ground locations. The use of KBI products in compressed air or gas systems automatically voids KBI's warranty for such products, and their use against our recommendation is entirely the responsibility and liability of the installer. KBI will not accept responsibility for damage or impairment of products, or other consequential or incidental damages caused by misapplication, incorrect assembly, and/or exposure to harmful substances or conditions.



NOT FOR USE WITH COMPRESSED AIR OR GASES

WARNING: DO NOT USE COMPRESSED AIR OR GAS TO TEST ANY PVC OR CPVC THERMOPLASTIC PIPING PRODUCT OR SYSTEM, AND DO NOT USE DEVICES PROPELLED BY COMPRESSED AIR OR GAS TO CLEAR SYSTEMS. THESE PRACTICES MAY RESULT IN EXPLOSIVE FRAGMENTATION OF SYSTEM PIPING AND COMPONENTS CAUSING SERIOUS OR FATAL BODILY INJURY.

Fabricated fittings are shown in shaded areas in this publication for easy identification.

Not all of the fabricated or Molded Fittings listed in this price schedule are carried in KBI's Distribution Center inventories. When ordering Fittings, please check with your servicing Distribution Center for availability. ALL ORDERS FOR NON-STOCKED Fittings are NON-CANCELABLE and NON-RETURNABLE. Additional fabricated fittings are available upon request. All fabricated fittings are sold in bulk quantities.

CONFIGURATION DESCRIPTIONS

Definitions of abbreviated configuration descriptions follow.

FPT	Female Iron Pipe Thread
IPS	Iron Pipe Size
MPT	Male Iron Pipe Thread
PIP	Plastic Irrigation Pipe
S	Solvent Weld Socket (<i>CTS</i>)
SPIGOT	Spigot End (<i>CTS</i>)

PART NUMBER NOTATIONS

Listed part numbers may be accompanied by superscript, asterisks, or special symbols indicating information about the fitting. A list of such notations follow.

+	KBI's Specifications.
n	Not NSF Listed.
B	Sized with Bushing.


ADDITIONAL PART NUMBER INFORMATION

Letters contained in part numbers denote special information as indicated below.

S	CTS HUB
E	EPDM O-ring.
V	Viton O-ring.
OE	Open End
CE	Closed End
BE	Bullet End
BH	Blue Handle
RH	Red Handle
CH	Clear Handle

NOTES

This image shows a single sheet of white paper with horizontal ruling lines. The lines are evenly spaced and run across the width of the page. There are no margins, text, or other markings on the paper.

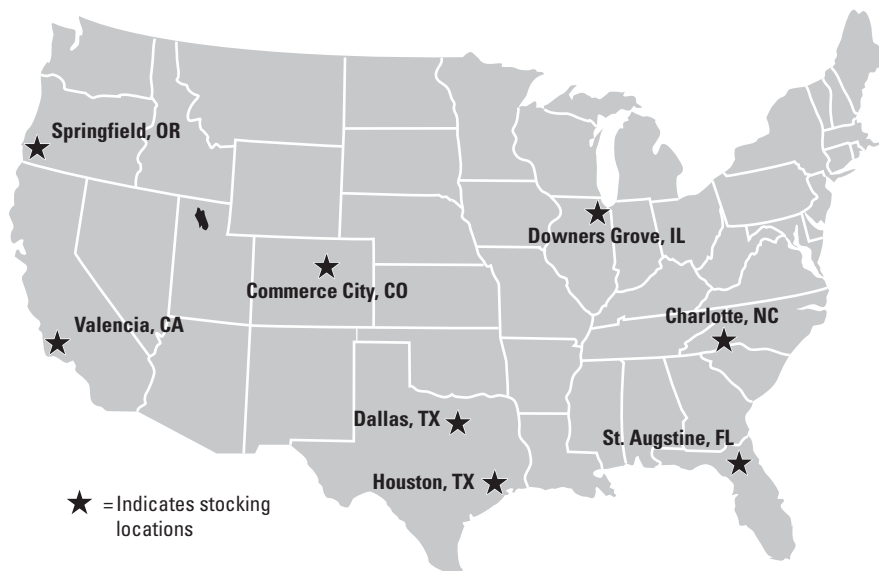

King Bros. Industries
The Choice of Professionals
29101 The Old Road
Valencia, CA 91355
Tel: 1-800-325-9468 1-661-257-3262
Fax: 1-661-257-4320

www.kbico.com