


# AMERI-METAL Flashings


## FLASHING SELECTION GUIDE

Please read this flashing installation guide before placing your order. Because of conflicting or overlapping codes, it is sometimes difficult to determine which type of flashing to use. The following data may be helpful in selecting the right flashing for specific installations in the Southern California area.

1. Dimensions shown are measured from base of riser to edge of skirt or base.
2. The Standard Flashing is generally acceptable for composition or shingle roofs unless pitch of roof, shingle exposure or roofing material is unusual. It is a good idea to check your codes.
3. FHA Standards require the FHA flashing shown above, depending on the roof covering or other factors.
4. For tile roof flashings, see Dead Soft Aluminum Flashings.



Standard Flashing

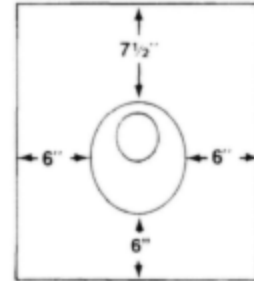

FHA Flashing

Manufacturer's UPC Number 095029



## Round All-Pitch Plumbing and Electrical Flashings

Description	For Use With	Riser Opening	Non-Stock	Part No.	UPC SKU No.	Pcs./ Ctn.	Lbs./ Ctn.	List Price Each
1/2" Standard Flashing	1/2" Steel Pipe	7/8"		1/2F	10035 0	12	12	4.74
1/2" 6/12-12/12 Pitch Flashing and DWV	"	"		1/2F12	11050 2	1*	1 1/2 ea.	20.13
1/2" FHA Flashing	"	"		1/2FFU	30770 4	12	20	6.82
1/2" Standard Flashing	1/2" EMT	13/16"		1/2FX	30010 1	12	12	5.92
3/4" Standard Flashing	3/4" Steel Pipe	1 1/8"		3/4F	30020 0	12	12	4.99
3/4" 6/12-12/12 Pitch Flashing and DWV	"	"		3/4F12	11051 9	1*	1 1/2 ea.	20.13
3/4" FHA Flashing	"	"		3/4FFU	30780 3	12	21	6.98
3/4" Standard Flashing	3/4" EMT	5/8"	#	3/4FX	30030 9	12	12	5.96
1" Standard Flashing	1" Steel Pipe	1 3/8"		1F	30035 4	12	12	4.91
1" 6/12-12/12 Pitch Flashing and DWV	"	"		1F12	11052 6	1*	1 1/2 ea.	20.13
1" FHA Flashing	"	"		1FFU	30782 7	12	20	6.82
1" Standard Flashing	1" EMT	1 13/16"		1FX	30040 8	12	12	5.96
1 1/4" Standard Flashing	1 1/4" Steel Pipe	1 7/8"		1 1/4F	30050 7	24	23	3.70
1 1/4" 6/12-12/12 Pitch Flashing and DWV	"	"		1 1/4F12	11053 3	1*	1 1/2 ea.	20.13
1 1/4" FHA Flashing	"	"		1 1/4FFU	30790 2	24	42	5.83
1 1/2" Standard Flashing	1 1/2" Steel Pipe	1 5/8"		1 1/2F	30060 6	24	23	3.81
1 1/2" 6/12-12/12 Pitch Flashing and DWV	"	"		1 1/2F12	11054 0	1*	1 1/2 ea.	20.13
1 1/2" FHA Flashing	"	"		1 1/2FFU	30795 7	24	42	5.83
2" Standard Flashing	2" Steel Pipe	2 3/8"	#	2F	30070 5	24	21	3.75
2" 6/12-12/12 Pitch Flashing and DWV	"	"		2F12	11055 7	1*	1 1/2 ea.	20.13
2" FHA Flashing	"	"		2FFU	30800 8	24	41	5.66
2" Standard Flashing	2" EMT	2 3/16"		2FX	30080 4	24	21	5.96
3" Standard Flashing	3" Soil Pipe	3 3/8"		3SF	30090 3	12	15	7.47
3" FHA Flashing	"	"		3SFFU	30810 7	12	24	8.85
4" Standard Flashing	4" Soil Pipe	4 3/8"		4SF	30095 8	12	20	7.47
4" FHA Flashing	"	"		4SFFU	30812 1	12	31 1/2	10.33

# Non-stock. Allow 3 weeks for shipment.

**NOTES:** Steel Pipe Flashings also fit same size ABS and PVC Plastic Pipe. EMT - "Electric Metal Tubing"  
DWV - "Drainage Waste Vent"  
1\* - Cartoned as ordered.

No broken cartons. Orders placed in less than full carton quantities will automatically be increased to full cartons.

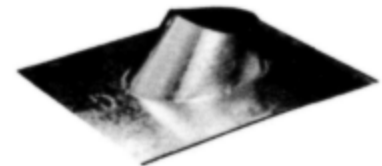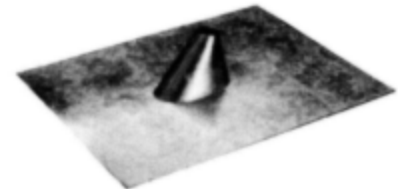

---

## AmeriFlex® Single Wall Connector System.

---




Faster, easier hook-ups of one or more appliances to the gas vent are assured with the AmeriFlex® super flexible connector pipe system available in 3" - 5" diameters. This UL listed connector eliminates the need for cutting, crimping, fitting or screw fastening at joints and requires only 1" clearance to combustibles. The single-wall corrugated aluminum pipe section may be compressed 4 inches per foot to shorten lengths. Coordinated wye and tee fittings and a snap-lock connecting system combine to produce perfect connections to AmeriVent® gas vents.

---

## AmeriFlex® Flexible Gas Vent Reliner Kit.

---

**NEW**

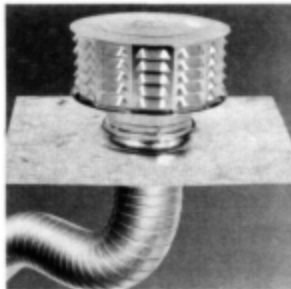


With AmeriFlex® reliner kits, you are able to meet the demand for adapting masonry chimneys to safe venting of gas appliances. New product design uses sheet metal screws for quick, convenient connection.

This AmeriFlex® reliner features a crimped spiral lock seam which makes the vent stronger and more damage resistant. Kits are available in 3 - 8 inch diameters with 25 and 35-foot liners and 5, 10 and 15 foot extensions. The system is UL listed to zero clearance between the liner and the inside of the chimney and zero clearance between combustibles and the outside of the chimney.

---

## AmeriMetal® Standard Sheet Metal Products.

---

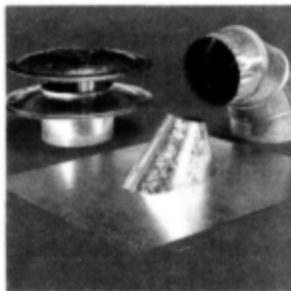


Dependable AmeriMetal® single-wall sheet metal products have traditionally been the first choice for members of the plumbing, HVAC, electrical and roofing contractor trades. The line includes single wall caps, flashings and supports as well as other sheet metal construction items.

---

## AmeriVent® Direct Vent.

---

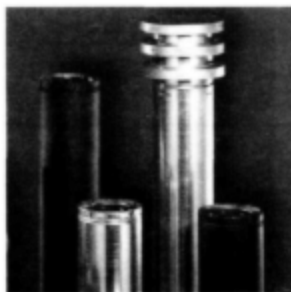

Available in 4" x 6 5/8" and 5" x 8" diameters, AmeriVent Direct Vent provides a complete line of components for all typical installations, both vertical and horizontal. AmeriVent Direct Vent factory assembled construction is unique with a galvanized steel outer wall and superior corrosion resistant stainless steel inner wall. It fits most existing start collars.


The inner wall factory installed graphite gasket makes for easy secure twist lock installation. The 360° rotation allows elbows to rotate in either direction, while still maintaining the secure lock system.

AmeriVent Direct Vent is for use only on appliances listed or certified for use with AmeriVent Direct Vent. Approved for many hearth appliances. Contact Customer Service for a complete listing.

## Round All-Pitch Heater Vent Flashings (All-Pitch means flat-to-5/12)

Description	For Use With	Non-Stock	Part No.	UPC SKU No.	Pcs./ Ctn.	Lbs./ Ctn.	List Price Each
3" Standard Flashing	3" Conductor	#	3CF	30220 4	12	16	6.07
3" FHA Flashing	"		3CFFU	30875 6	12	26	8.74
4" Standard Flashing	4" Transite		4TF	30240 2	12	19	7.92
4" FHA Flashing	"		4TFFU	30885 5	12	31	10.81
4" Standard Flashing	4" Conductor	#	4CF	30250 1	12	15	7.28
4" FHA Flashing	"		4CFFU	30890 9	12	26	10.25
5" Standard Flashing	5" Conductor		5CF	30280 8	12	19	9.95
5" FHA Flashing	"		5CFFU	31032 2	12	29 1/2	12.23
6" Standard Flashing	6" Conductor		6CF	30300 3	12	21	13.54
6" FHA Flashing	"		6CFFU	30905 0	12	34	15.72
7" Standard Flashing	7" Conductor	#	7CF	30310 2	12	25	17.16
7" FHA Flashing	"		7CFFU	30910 4	6	19	20.60
12" Standard Flashing	12" Conductor		12CF	30370 6	1*	3 1/2 ea.	29.02
14" Standard Flashing	14" Conductor	#	14CF	30390 4	1*	4 1/2 ea.	49.43
16" Standard Flashing	16" Conductor	#	16CF	30410 9	1*	4 1/2 ea.	63.38
18" Standard Flashing	18" Conductor		18CF	31518 1	1*	5 1/2 ea.	95.35
20" Standard Flashing	20" Conductor		20CF	31523 5	1*	6 1/2 ea.	114.57

NOTES: 1\* - Cartoned as ordered.  
Items over 8" are 26 gauge.

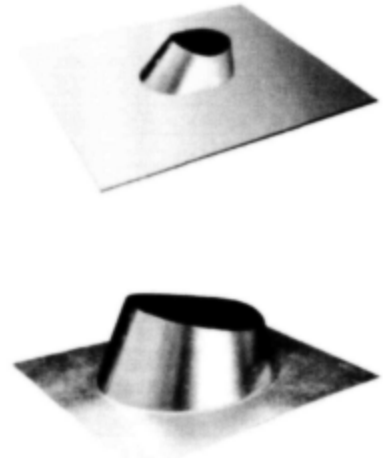

## Aluminum Flashings

.020 Dead Soft Base - Standard 1/2 Hard Aluminum Riser.

Description	For Use With	Nominal Skirt Size	Non-Stock	Part No.	UPC SKU No.	Pcs./ Ctn.	Base	Lbs./ Ctn.	List Price Each
1/2" Dead Soft Alum.	1/2" Steel Pipe & DWV	9" x 9"	#	1/2FDSA	31406 1	12	21" x 24"	15	19.55
3/4" Dead Soft Alum.	3/4" Steel Pipe & DWV	"		3/4FDSA	31407 8	12	"	15	19.55
1" Dead Soft Alum.	1" Steel Pipe & DWV	"		1FDSA	31409 2	12	"	15	19.55
1 1/4" Dead Soft Alum.	1 1/4" Steel Pipe & DWV	"		1 1/4FDSA	31410 8	24	"	27 3/4	19.55
1 1/2" Dead Soft Alum.	1 1/2" Steel Pipe & DWV	"		1 1/2FDSA	33526 4	24	"	27	17.14
2" Dead Soft Alum.	2" Steel Pipe & DWV	"		2FDSA	31412 2	24	"	26 1/2	17.14
3" Dead Soft Alum.	3" Ameri-Vent	"		3EFDSA	30205 1	12	22" x 24"	17	21.25
3" Dead Soft Alum.	3" Conductor	"	#	3CFDSA	12008 2	"	"	"	23.12
3" Dead Soft Alum.	3" Soil Pipe	"		3SFDSA	10932 2	12	"	"	28.18
4" Dead Soft Alum.	4" Ameri-Vent	"		4EFDSA	30235 8	12	24" x 27"	20	23.70
	4" Conductor	"		4CFDSA	12009 9	"	"	"	25.77
5" Dead Soft Alum.	5" Ameri-Vent	8 1/2" x 8 1/2"		5EFDSA	33046 7	12	24" x 28"	21	30.10
	5" Conductor	"		5CFDSA	12010 5	"	"	"	31.67
6" Dead Soft Alum.	6" Ameri-Vent	"		6EFDSA	30683 7	12	24" x 29"	22	32.46
	6" Conductor	"		6CFDSA	12011 2	"	"	"	33.58
7" Dead Soft Alum.	7" Conductor	"		7CFDSA	31435 1	12	"	21 1/2	37.74
	6" Transite	"		"	"	"	"	"	"
7" Dead Soft Alum.	7" Ameri-Vent	8" x 8 1/2"		7RFDSA	30325 6	12	24" x 30"	21 1/2	38.90
	7" Transite	"		"	"	"	"	"	"
	8" Conductor	"		"	"	"	"	"	"
8" Dead Soft Alum.	8" Ameri-Vent	6 1/2" x 10 1/4" x 5 1/2"		8RFDSA	30335 5	1*	24" x 30"	2	40.06
	8" Transite	"		"	"	1*	"	"	"
	9" Conductor	"		"	"	1*	"	"	"
4" Oval Dead Soft Alum.		9" x 9"		4OFDSA	31438 2	12	24" x 28"	20 1/2	32.38
5" Oval Dead Soft Alum.		"		5OFDSA	31442 9	1*	24" x 33 1/2"	1 1/2	50.61
6" Oval Dead Soft Alum.		"	#	6OFDSA	31446 7	1*	24" x 33 1/2"	1 1/2	53.02

# Non-stock. Allow 3 weeks for shipment.

NOTES: Steel Pipe Flashings also fit same size ABS and PVC Plastic Pipe.  
1\* - Cartoned as ordered.  
DWV - "Drainage Waste Vent"

No broken cartons. Orders placed in less than full carton quantities will automatically be increased to full cartons.