

### Supurr-Flex<sup>®</sup> pure aluminum, multi-layered flexible metallic duct, UL 181 Class 1 Air Connector



Model No.	Description
FUL0325	UL Listed, multi-layered flexible duct
FUL0425	UL Listed, multi-layered flexible duct
FUL0525	UL Listed, multi-layered flexible duct
FUL0625	UL Listed, multi-layered flexible duct

#### Performance Data

for uninsulated aluminum, multi-layered flexible metallic duct

#### Maximum Velocity

- 4000 FPM

#### Maximum Rated Pressures

- all diameters 8" w.g. Pos.
- 3"-6" dia., -4.0" w.g. Neg.

#### Operating Temperature Range

- 0°F to 265°F

#### "FUL"


- UL 181 Class 1 Air Connector, flexible

#### General Information

- available in diameters 3" to 6" and lengths of 25'
- 25 foot compresses to 15"-(approx.)
- class 1 flexible air connectors shall be limited to installation lengths of 14 feet
- **best** non-insulated ventilation duct made
- ideal for bathroom fan exhaust, fresh air intake and non-insulated ventilation duct

#### Pressure Loss Diagram

VELOCITY FPM

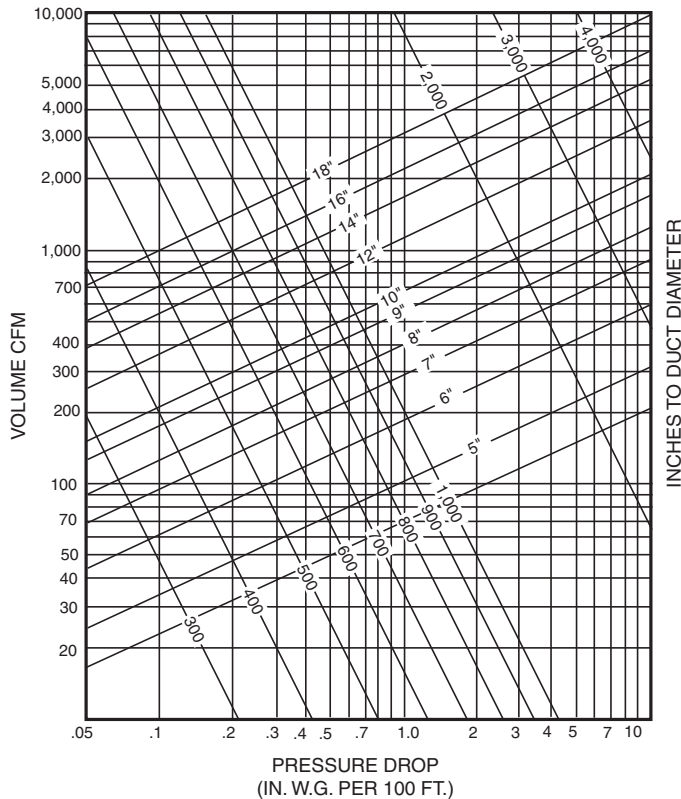

Model No.	A	length
FUL0325	3" dia.	25 ft.
FUL0425	4" dia.	25 ft.
FUL0525	5" dia.	25 ft.
FUL0625	6" dia.	25 ft.

6/01

© 2001

DEFLECTO CORPORATION • P.O. Box 50057 • Indianapolis, IN 46250 • www.deflecto.com  
DEFLECTO/Canada Ltd. • St. Catharines, Ontario • Canada L2M 3Y2

Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.