
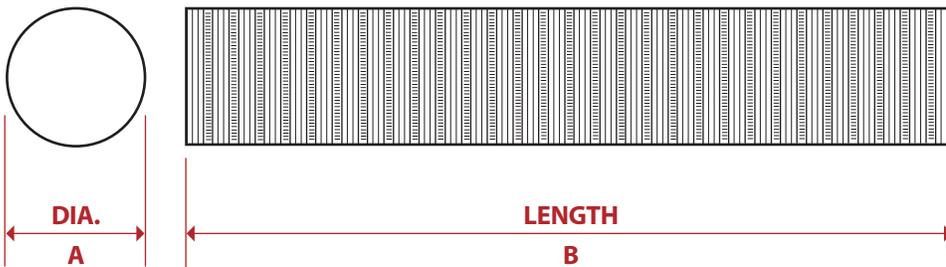


Aluminum Semi-Rigid Flexible Duct

Class 0, Flexible Air Duct

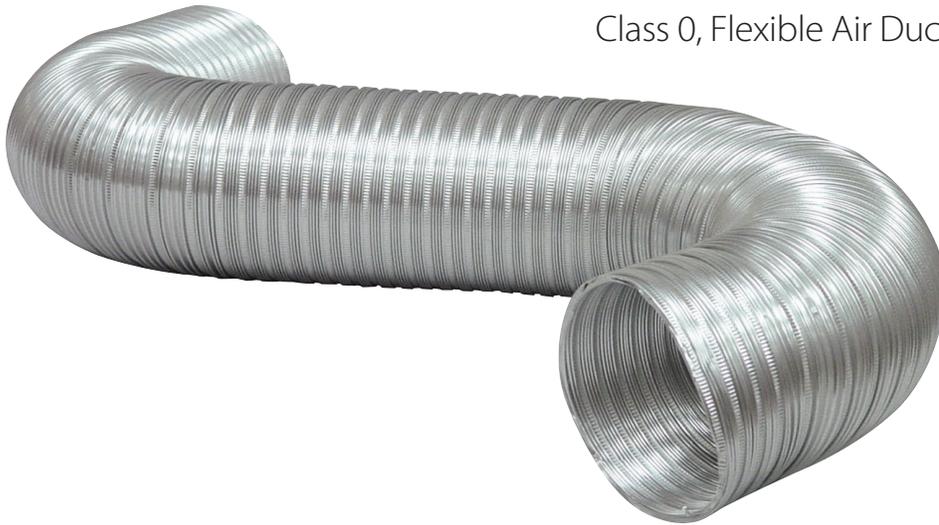

Metal worm drive clamps
(available with A048MX/9 only)

MODEL NO.	DIMENSIONS A x B	DESCRIPTION
A038/9	3" x 8'	Duct
A038/16	3" x 8'	Duct
A038/25	3" x 8'	Duct
A0325/5	3" x 25'	Duct
A045/9	4" x 5'	Duct
A048/6	4" x 8'	Duct
A048X/6	4" x 8'	Duct
A048MX/9	4" x 8'	Duct w/ 2 Clamps
A048/9	4" x 8'	Duct
A048/16	4" x 8'	Duct
A048/40	4" x 8'	Duct
A0425/3	4" x 25'	Duct
A058/5	5" x 8'	Duct
A068/4	6" x 8'	Duct
A078/5	7" x 8'	Duct
A088/4	8" x 8'	Duct

GENERAL INFORMATION

- 8ft./2.4m lengths compress to 28in./71cm
- 25ft./7.6m lengths compress to 88in./2.2m
- Material Description:
Common name – Aluminum Alloy Trade Name – Aluminum Alloy 3003
- A multiple use product, our semi-rigid flexible ducting can be used for exhaust and bathroom venting
- Always check with your local codes or the authority having jurisdiction

PERFORMANCE DATA

For uninsulated aluminum flexible duct

Maximum Velocity

- 5000FPM/25MPS

Maximum Rated Pressures

- 3" -8" dia., 6" W.C./1.5 Kpa Pos/Neg

Operating Temperature Range

- -100°F to 430°F, -73°C to 221°C Inter.

Class 0 Air Duct, Flexible

Flame Spread/Smoke Developed

- 0/0

Deflecto's policy is one of continual product improvement in design and manufacturing wherever possible, therefore all specifications and designs are subject to change without notice and without incurring obligations.