


SPECIFICATION

Furnish and install roof vent flashing with 24 gauge galvanized steel base, fitted with elastomer collar. Unit shall be Water-Tite item number checked below as manufactured by IPS Corporation, as per corresponding dimensional characteristics, or equivalent. **(Do not use Petroleum based mastics, sealing compounds, or paints on collar portion of all flashings, on all hardbase, flexible, or rain collars.)**

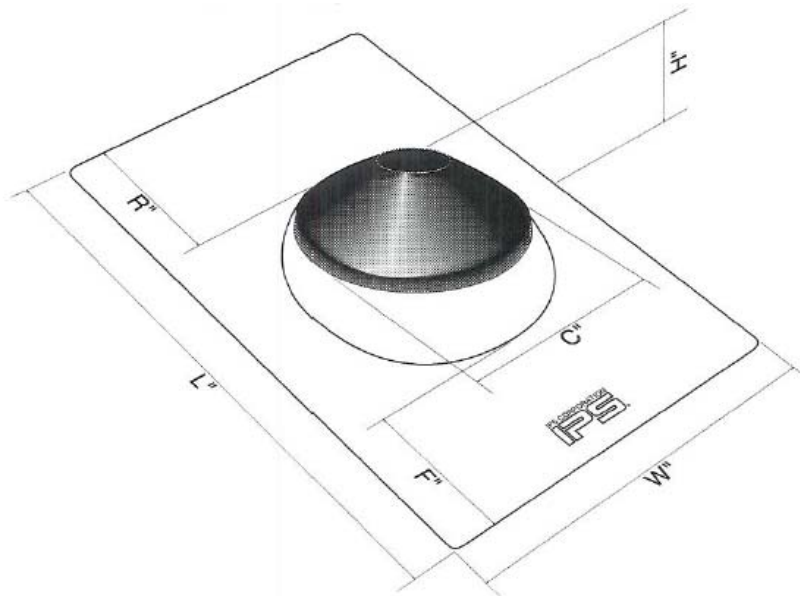

✓ PROD. CODE	Roof Vent Flashing Dimensional Characteristics								
	Model	Vent Size	Dim. W	Dim. L	Dim. R	Dim. F	Dim. C	Dim. H	
	81850	GB 1	1 ¹ / ₄ " - 1 ¹ / ₂ "	8 ³ / ₄ "	12 ¹ / ₂ "	3 ¹ / ₂ "	2 ³ / ₈ "	4 ¹ / ₄ "	2 ¹ / ₄ "
	81855	GB 2	2"	8 ³ / ₄ "	12 ¹ / ₂ "	3 ¹ / ₂ "	2 ³ / ₈ "	4 ¹ / ₄ "	2 ¹ / ₄ "
	81860	GB 3	3"	10 ³ / ₄ "	14 ¹ / ₂ "	2 ⁵ / ₈ "	2 ³ / ₈ "	5 ¹ / ₂ "	2"
	81865	GB 4	4"	12"	16"	3 ³ / ₄ "	2 ³ / ₄ "	6 ¹ / ₂ "	2 ¹ / ₈ "
	81870	GB 5	1/2", 3/4", 1"	8 ³ / ₄ "	12 ¹ / ₂ "	3 ¹ / ₂ "	2 ³ / ₈ "	4 ¹ / ₄ "	2 ⁵ / ₈ "
	81872	GB 118	1 ¹ / ₄ " - 1 ¹ / ₂ "	18"	18"	6 ¹ / ₄ "	5 ⁷ / ₈ "	4 ¹ / ₄ "	2 ¹ / ₄ "
	81874	GB 218	2"	18"	18"	6 ¹ / ₄ "	5 ⁷ / ₈ "	4 ¹ / ₄ "	2 ¹ / ₄ "
	81876	GB 318	3"	18"	18"	5 ³ / ₈ "	5 ¹ / ₈ "	5 ¹ / ₂ "	2"
	81878	GB 418	4"	18"	18"	4 ³ / ₄ "	3 ³ / ₄ "	6 ¹ / ₂ "	2 ¹ / ₈ "
	81879	GB 518	1/2", 3/4", 1"	18"	18"	6 ¹ / ₄ "	5 ⁷ / ₈ "	4 ¹ / ₄ "	2 ⁵ / ₈ "