


FLO-LOCK™

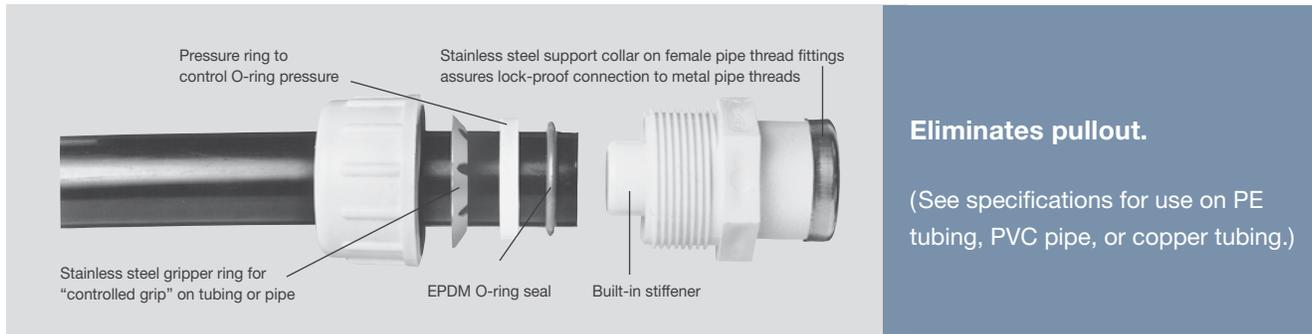

Eliminates pullout.

(See specifications for use on PE tubing, PVC pipe, or copper tubing.)

Tube Size SIDR-7 Pep Couplings & Adapters – Series 800 (Rated @ 200 PSI Static Pressure @ 72°F)

	Part No.	Tube Size	Connection Size	Body Length	Color	Pkg. Qty.	Case (lbs.)	Product Class	Specifications
Coupling 	Coupling								
	810-07	3/4"	3/4" x 3/4" TS	4-1/2"	White	24	10.6	41FL	For use on Polyethylene Tube Size SIDR-7
	810-10	1"	1" x 1" TS	5"	White	15	8.5	41FL	ASTM D-2239
Male Adapter 	Male Adapter								
	830-07	3/4"	3/4" MPT x 3/4" TS	2-5/8"	White	20	5.0	41FL	For use on Polyethylene Tube Size SIDR-7
	830-10	1"	1" MPT x 1" TS	3-1/4"	White	28	9.4	41FL	ASTM D-2239
	830-71	3/4" x 1"	3/4" MPT x 1" TS	3-1/2"	White	18	5.5	41FL	PVC
Female Adapter 	Female Adapter								
	830-121	1" x 1-1/4"	1" MPT x 1-1/4" TS	3"	White	12	4.3	41FL	NSF/ANSI 61+372 UPC 830- 07/10 Only
Spigot Adapter 	Female Adapter								
	831-07	3/4"	3/4" FPT x 3/4" TS	2-5/8"	White	20	6.0	41FL	For use on Polyethylene Tube Size SIDR-7
	831-10	1"	1" FPT x 1" TS	2-7/8"	White	28	10.8	41FL	ASTM D-2239 PVC NSF/ANSI 61+372
	Spigot Adapter								
	833-07	3/4"	3/4" IPS Spg x 3/4" TS	3"	White	20	5.0	41FL	For use on Polyethylene Tube Size SIDR-7
	833-71	3/4" x 1"	3/4" IPS Spg x 1" TS	3"	White	20	7.0	41FL	ASTM D-2239
	833-10	1"	1" IPS Spg x 1" TS	3"	White	28	9.4	41FL	PVC NSF/ANSI 61+372 UPC

* Insert stiffener supplied must be used with this fitting.

FLOW MANAGEMENT