


SPECIFICATION

REDI-CLAMP®


MODEL 245

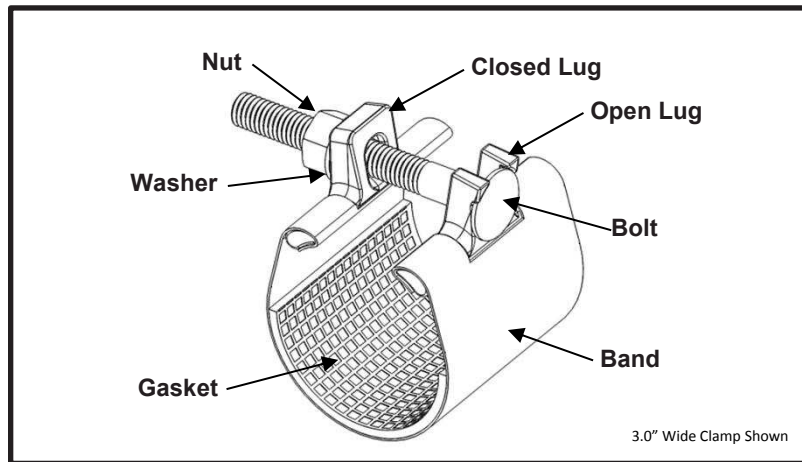

APPLICATIONS

Typical Uses

- Repair leaks due to punctures, splits, or holes
- Examples:



Standard Pipe Sizes

- 0.5" to 12" nominal

Standard Widths


- 3.0", 6.0", 9.0", 12.0"

Type of Pipe

- Carbon Steel, Stainless Steel, PVC, Copper

Working Pressure

- Up to 150 psi depending on type of pipe, type of repair, pipe diameter, service conditions, and installation workmanship

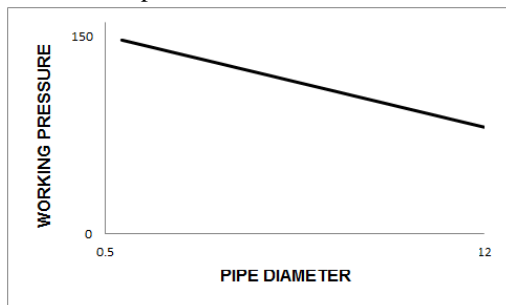



SPECIFICATION

REDI-CLAMP®

MODEL 245

MATERIALS

- **Band**
 - Type 304 Stainless Steel per ASTM A240
 - Band Thickness: 24 gauge thick for clamps 2.88" diameter and smaller
22 gauge thick for clamps 3.00" diameter and larger
 - Formed to pipe O.D. and secured to lug body
 - Double band supplied on nominal pipe sizes 10" and larger
- **Lug**
 - Cast using Ductile Iron 65-45-12 per ASTM A536
 - Flexi-Coat® fusion bonded epoxy finish
 - Designed for drop in replaceable bolts
 - One open loop lug and one closed loop lug. The bolts do not have to be removed to install clamp, preventing lost hardware
 - Remaining opening(s) have closed-closed loop lugs securing clamp sections together for ease of installation
 - Precision cast with contoured surface to equalize clamping pressures around the pipe
- **Gasket**
 - Nitrile (Buna-N) per ASTM D2000
 - Gasket Thickness: 0.125"
 - Certified to NSF/ANSI 61-G & 372
 - Compounded to resist water, oil, natural gas, acids, alkalies, most (aliphatic) hydrocarbon fluids., and many other chemicals
 - Temperature range: -20°F to +180°F
 - Finely gridded surface conform to irregularities on the pipe surface and provide superior sealing on rough or pitted areas
 - Gasket spans approximately 180° of the clamp diameter and is positioned to provide superior sealing at the point of leak
- **Bolt**
 - Material: 0.5" – 1.5" nominal pipe size = Carbon Steel SAE J249 GR2
2.0" – 12.0" nominal pipe size = Carbon Steel SAE J249 GR5
 - Fe/Zn coated per ASTM F1941-10
 - Size: 0.5" – 1.5" nominal pipe size = 3/8"-16UNC x 3.00" long, Round Head Square Neck
2.0" – 5.0" nominal pipe size = 7/16"-14UNC x 4.00" long, Round Head Square Neck
6.0" – 12.0" nominal pipe size = 7/16"-14UNC x 5.00" long, Round Head Square Neck
 - Rolled threads for improved physical characteristics, greater thread accuracy, and smooth surface finish
 - Drop in replaceable bolts
- **Nut**
 - Carbon Steel per ASTM A307
 - Fe/Zn coated per ASTM F1941-10
 - Size: 0.5" – 1.5" nominal pipe size = 3/8"-16UNC Heavy Hex
2.0" – 12.0" nominal pipe size = 7/16"-14UNC Heavy Hex
- **Washer**
 - Carbon Steel per ASTM A108
 - Fe/Zn coated per ASTM F1941-10
 - Size: 7/16" Type A Plain



SPECIFICATION

REDI-CLAMP[®]

MODEL 245

LISTINGS

- Certified to NSF/ANSI 61-G & 372

OPTIONS

- Type 316 Stainless Steel band
- Type 304 Stainless Steel hardware with fluoropolymer coated nuts to prevent galling
- Type 316 Stainless Steel hardware with fluoropolymer coated nuts to prevent galling
- Alternative gasket material (e.g. Viton, EPDM, etc.)
- 0.25" thick gasket
- Lug to lug gasket span

NOTES

- This product **does not** restrain the pipe from pulling out of the fitting
- Clamp may be used for most water and gas applications with the exception of gas plastic pipe repair. It is suitable for restoring shape and marking crimped polyethylene gas service lines.
- Redi-Clamp[®] is a registered trademark of Smith-Blair Inc.
- These product specifications were correct at the time of publication and are subject to change without notice
- See the Smith-Blair[®] web site for part numbers and ordering information
- See the Smith-Blair[®] web site for warranty information
- See the Smith-Blair[®] web site for corrosion warnings

30 Globe Ave, Texarkana, AR 71854
Ph: 870-773-5127 • Fax: 870-773-5212
Toll-Free Numbers: Ph: 800-643-9705 • Fax: 800-648-6792

