

SPECIFICATIONS

	COMPRESSION FITTINGS: (CHECK ONLY ONE box for each section)
	1/2" COMP. FOR 3/8" ID COPPER LINE
	5/8" COMP. FOR 1/2" ID COPPER LINE (This line is the floor drain trap make-up water line.)
	CABINET: (16 GAUGE STEEL)
	DRY WALL, FLUSH MOUNT (IN WALL) (CABINET DEPTH 3 3/8") (MOUNTING ANCHORS PROVIDED)
	FIRE RATED, FLUSH MOUNT (IN WALL) (CABINET DEPTH 6") (MOUNTING ANCHORS PROVIDED)
	ACCESS DOOR: (DRY WALL)
	PRIME COAT
	STAINLESS STEEL
	ACCESS DOOR LATCH:
	SCREW DRIVER (Standard)
	ALLEN KEY
	CYLINDER LOCK
	ACCESS DOOR: (FIRE RATED)
	PRIME COAT
	STAINLESS STEEL
	ACCESS DOOR LATCH:
	RING PULL (Standard)
	CYLINDER LOCK

The PRIME-TIME PRIMING ASSEMBLY will supply a minimum of 2 oz. of potable water at 20 P.S.I.G. at a preset factory setting of 10 seconds every 24 hours. The entire unit is pre-assembled in a steel cabinet ready to be flush wall mounted. The Priming assembly must be mounted above the finished floor.

PROJECT SUBMITTAL

Project: _____

Contractor: _____

Engineer: _____

Date Submitted: _____

Prepared By: _____

All manifolds are available in either 1/2" or 5/8" compression fittings.

MODEL # PT-
PT-1320 - # of drains served:

PT-2130 - # of drains served:


(Please refer to list below for
dimensions of cabinet models)

CABINET DIMENSIONS:

**MODEL # PT-4 - PT-12 ID Width 14" x
Height 16" x Depth 3 3/8"**

**MODEL # PT-1320 ID Width 20 1/2" x
Height 16 1/2" x Depth 3 3/8"**

**MODEL # PT-2130 ID Width 30 1/2" x
Height 20 1/2" x Depth 3 3/8"**

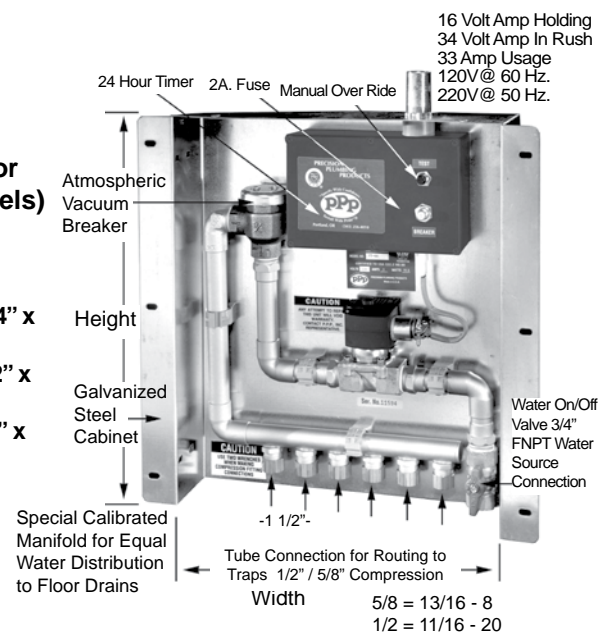

DEPTH OF CABINET:

Standard Depth 3 3/8", Fire Rated Depth 6"

INLET:

3/4" inch NPT female. ANSI/ASME B1.20.1.

OUTLET:

5/8" or 1/2" inch compression fitting. SAEJ512.

MANIFOLD:

3/4" Type "L" copper tubing. ASTM B88.

SOLDERED JOINTS:

95-5 lead free containing lead not in excess of 0.2%.

ELECTRICAL COMPONENTS:

Circuit Breaker, Test Switch, Timer, Solenoid Valve marked as UL listed.

Electronic assembly tested and certified per UL #73.

BACKFLOW PREVENTION:

Anti-Siphon atmospheric vacuum breaker meets Los Angeles code, IAPMO, New York Board of Standards, ASSE 1001 and CSA.

METAL CABINET:

16 gauge steel, galvanized.

ACCESS DOOR:

Optional: Prime Coat, Stainless Steel, and Fire Rated.

NOTE: UNIT MUST BE INSTALLED PLUMB. - MUST BE
INSTALLED WITH ACCESS. - All PRIME-TIME Flush Mount
Units are available in Fire Rated Cabinets - 6" in Depth.



Precision Plumbing Products
Division of J.L. Industries, Inc.

Airport Business Center
6807 NE 79th Court, Suite E
Portland, Oregon 97218

T (503) 256-4010

F (503) 253-8165

www.pppinc.net



Rev 02/12

PATENT NO. 5,253,670