




A KOHLER COMPANY

FINESSE™

Features

- Heavy-duty, aluminum-hinge shower door with stainless steel pin
- 65-1/2" (166.4 cm) shower door height (no top track)
- No top track allows easy access into the shower
- Full length continuous hinge along the entire jamb edge for smooth, stable operation
- Designer handle/towel bar increases usability
- 5/32" (4 mm) thick tempered glass ensures maximum safety and durability
- Aluminum components extruded from alloy 6063-T5
- Stainless steel hardware prevents rusting or corrosion
- All installation hardware included (tools not included)
- Adjust for out of plumb walls up to 3/4" (2 cm) by simply turning the adjustment block screw

HINGE SHOWER DOOR 6505 ALSO 6506

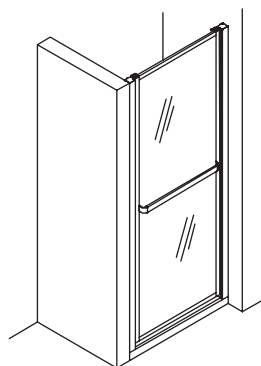

Codes/Standards Applicable

Specified model meets or exceeds the following:

- ANSI Z97.1 (tempered glass)

Colors/Finishes

- S: Silver
- PB: Polished Brass
- N: Nickel
- W: White
- DR: Deep Bronze

Specified Model


Model	Application	Glass Texture	Pattern	* Frame Colors/Finishes				
6505-30DR-G06	Shower	Rain	None					<input type="checkbox"/> DR
6505-33DR-G06	Shower	Rain	None					<input type="checkbox"/> DR
6505-33DR-G07	Shower	Smooth	Ellipse					<input type="checkbox"/> DR
6505-36DR-G06	Shower	Rain	None					<input type="checkbox"/> DR
6505-36DR-G07	Shower	Smooth	Ellipse					<input type="checkbox"/> DR
6505-39DR-G06	Shower	Rain	None					<input type="checkbox"/> DR
6505-39DR-G07	Shower	Smooth	Ellipse					<input type="checkbox"/> DR
6506-30*	Shower	Rain	None	<input type="checkbox"/> S	<input type="checkbox"/> PB			
6506-33*	Shower	Rain	None	<input type="checkbox"/> S		<input type="checkbox"/> N		
6506-36*	Shower	Rain	None	<input type="checkbox"/> S	<input type="checkbox"/> PB	<input type="checkbox"/> N		
6506-39*	Shower	Rain	None	<input type="checkbox"/> S	<input type="checkbox"/> PB			

* Note: Add appropriate frame color/finish code to the end of the unit model # when ordering.

SterlingPlumbing.com

Visit us online for fixture color choices, detailed product information, color photos, installation instructions, care guides, and warranties. Sterling offers additional lines of plumbing products to complement the Sterling product you've chosen. Sign up for the Sterling monthly e-newsletter which showcases our latest product innovations. You may also call our Sterling Plumbing Answer Center from within the USA at 1-888-STERLING in addition to consulting with your local dealer. Sterling. Strong. Professional. Design.

Model	A (Width Max/Min)	B (Height)	C (Walk Through Max)
6505-30*	30-1/2" (77.5 cm) / 27-1/2" (69.9 cm)	65-1/2" (166.4 cm)	21-11/16" (55.1 cm)
6505-33*	33-1/2" (85.1 cm) / 30-1/2" (77.5 cm)	65-1/2" (166.4 cm)	24-11/16" (62.7 cm)
6505-36*	36" (91.4 cm) / 33" (85.1 cm)	65-1/2" (166.4 cm)	27-3/16" (69.1 cm)
6505-39*	39-1/2" (100.3 cm) / 36-1/2" (92.7 cm)	65-1/2" (166.4 cm)	30-11/16" (77.9 cm)
6506-30*	30-1/2" (77.5 cm) / 27-1/2" (69.9 cm)	65-1/2" (166.4 cm)	21-11/16" (55.1 cm)
6506-33*	33-1/2" (85.1 cm) / 30-1/2" (77.5 cm)	65-1/2" (166.4 cm)	24-11/16" (62.7 cm)
6506-36*	36" (91.4 cm) / 33" (85.1 cm)	65-1/2" (166.4 cm)	27-3/16" (69.1 cm)
6506-39*	39-1/2" (100.3 cm) / 36-1/2" (92.7 cm)	65-1/2" (166.4 cm)	30-11/16" (77.9 cm)
Note: Minimum Width = A - [1-1/2" (3.8 cm)]			

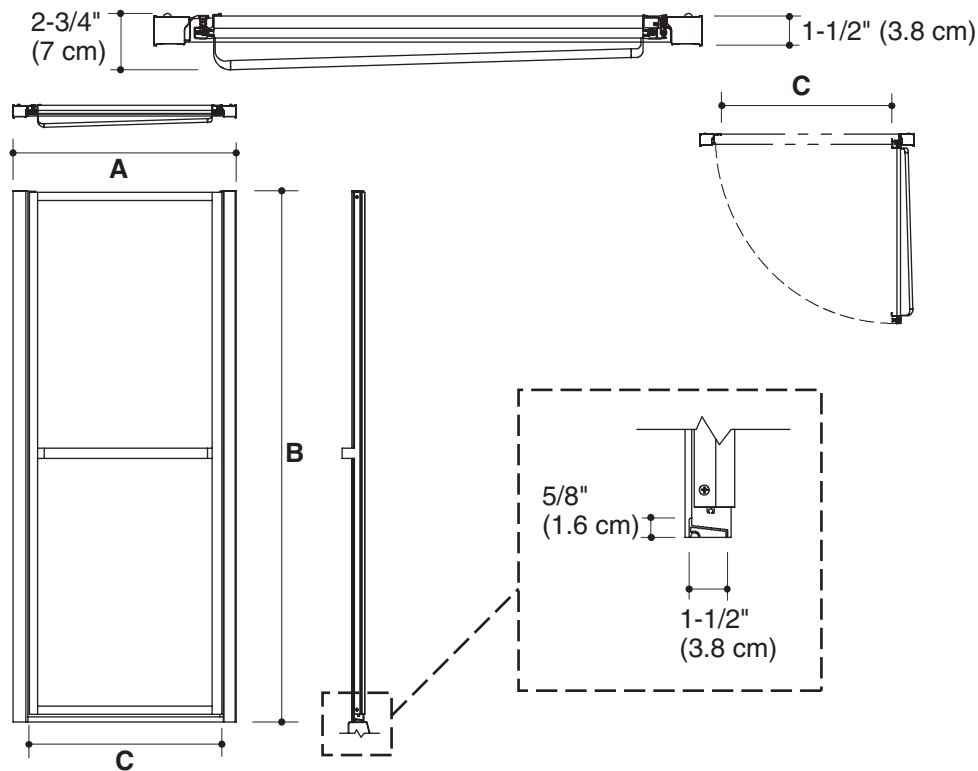

Product Diagram