



20-700 SERIES EXPANSION TANK WATER GAUGE

Job Name:	Contractor:
Job Location:	P.O. Number:
Engineer:	Representative:
Tag:	Wholesale Distributor:

DESCRIPTION

The Apollo® 20-700 Series bronze expansion tank gauge is designed for basic liquid level verification. They are not for use on boiler systems. Sight glass is available in any length up to 72 inches. Standard set includes top and bottom valves with EPDM glass packing, 1/4" needle drain valve in lower arm, glass and rods.


FEATURES

- 1/4" Drain Valve
- Glass Insertion Port Option
- Ball Checks Option
- Sizes 3/8", 1/2"
- Chrome Plate Option
- Canadian Registration 0F6616.5C

MATERIALS

Body: ASTM B584 C84400 Bronze
 Drain Body: ASTM B16 Brass
 Stem: ASTM B16 Brass
 Gland Nut: ASTM B16 Brass
 Packing Nut: ASTM B16 Brass
 Rods: Steel

DIMENSIONS

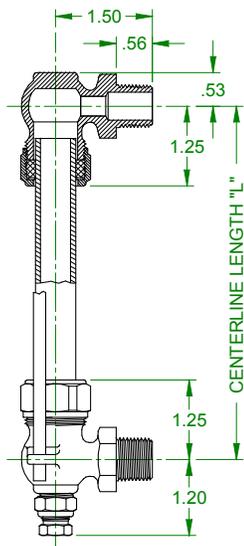

20-710



PERFORMANCE RATING

20-700: 125 psig @ 350°F, 300 psig @ 100°F
 (Subject to the limitation of the gauge glass)

OPTIONS

- | | | |
|------------------|--|---|
| Body | <input type="checkbox"/> Glass Port | <input type="checkbox"/> Standard |
| Drain type: | <input type="checkbox"/> Needle | <input type="checkbox"/> Ball Valve |
| Checks: | <input type="checkbox"/> Yes | <input type="checkbox"/> No |
| Pipe Size: | <input type="checkbox"/> 3/8" | <input type="checkbox"/> 1/2" |
| Chrome Plate | <input type="checkbox"/> Yes | <input type="checkbox"/> No |
| Glass Type: | <input type="checkbox"/> Standard | <input type="checkbox"/> High pressure |
| | <input type="checkbox"/> Redline | |
| Glass OD: | 5/8" only | |
| Glass Length: | _____ Specify "L" up to 72" | |
| Glass Packing: | <input type="checkbox"/> EPDM (std) | <input type="checkbox"/> Viton <input type="checkbox"/> Hypalon |
| | <input type="checkbox"/> Teflon | <input type="checkbox"/> Graphite |
| Glass Protector: | <input type="checkbox"/> Yes <input type="checkbox"/> No | |

Conbraco Industries, Inc. 701 Matthews Mint Hill Rd. Matthews NC 28106 USA; www.apollovalves.com; 704-841-6000

This specification is provided for reference only. Conbraco reserves the right to change any portion of this specification without notice and without incurring obligation to make such changes to Conbraco products previously or subsequently sold.