


TouchDown™

Universal Pipe Clamp


For

PowerBar™

Universal Slider Brackets

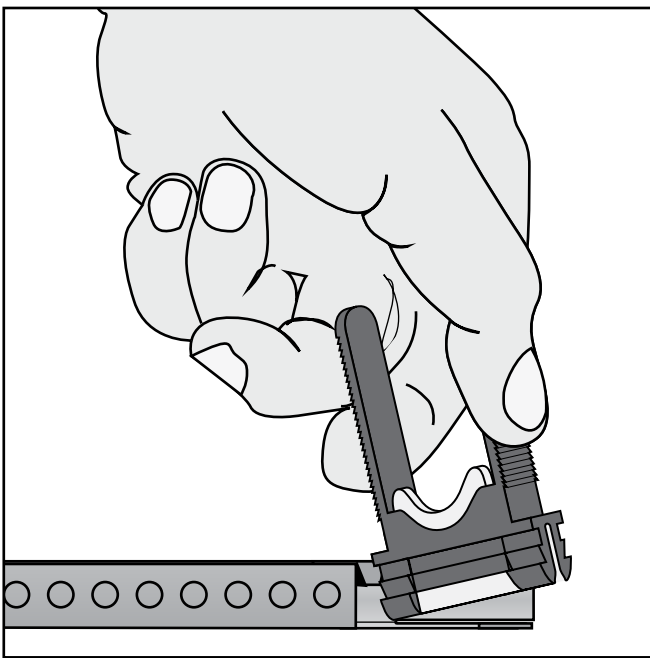

Slide TouchDown Clamp in sideways from end of bracket.



TouchDown Specifications		
Temp (°F)	Safe Working Load*	
	Black Nylon	E84
-10	70 lbs.	50 lbs.
10		
30		
50		
70		
90	30 lbs.	35 lbs.
110		25 lbs.
130		NOT RECOMMENDED for ANY load
150		
170		
190		
210		
230	NOT RECOMMENDED for ANY load	
Clamp capacity: ¼" O.D. - 1½" O.D.		
Black nylon: V2 flame rating		
E84: V0 flame rating		

*Safe working load = half failure load

