

# Single-zone Pump Relay

Submittal Information  
Revision A: May 15, 2008

## Project Information


|                                |                   |
|--------------------------------|-------------------|
| Job Name:                      |                   |
| Location:                      | Part No. Ordered: |
| Engineer:                      | Date Submitted:   |
| Contractor:                    | Submitted By:     |
| Manufacturer's Representative: | Approved By:      |

## Technical Data

|                        |                                             |
|------------------------|---------------------------------------------|
| Transformer:           | 120VAC input, 24VAC (10VA rating)           |
| Maximum Combined Load: | 7.2 A                                       |
| Ambient Conditions:    | Indoor use only, 32°F (0°C) to 122°F (50°C) |

## Product Information and Application Use

The Single-zone Pump Relay controls the operation of a single circulator or pump from a 24-volt signal. The Single-zone Pump Relay includes secondary low-voltage terminals for boiler operation.

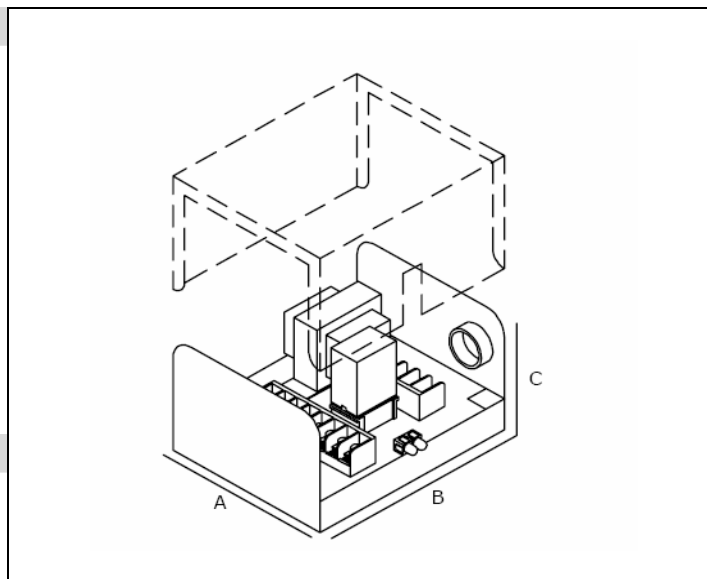

| ✓ Description          | Part Number | A     | B     | C     | Weight    |
|------------------------|-------------|-------|-------|-------|-----------|
| Single-zone Pump Relay | A3010100    | 4.25" | 5.25" | 2.75" | 2.30 lbs. |

## Installation

Connect the thermostat to the "T T" terminals on the switching relay. When the thermostat calls for heat, the relay is energized and power is given to the circulator. Refer to the Uponor Single-zone Pump Relay Instruction Sheet for additional information.

## Standards

N/A

## Codes

N/A

## Listings

N/A

## Related Applications

Radiant Heating and Cooling Systems

## Contact Information

Uponor, Inc.  
5925 148<sup>th</sup> Street West  
Apple Valley, MN 55124 USA  
Phone: (800) 321-4739  
Fax: (952) 891-2008  
www.uponor-usa.com

Uponor Ltd.  
655 Park Street  
Regina, SK S4N 5N1 CANADA  
Phone: (888) 994-7726  
Fax: (800) 638-9517  
www.uponor.ca