


THIS DOCUMENT IS TRUE AND CORRECT AT TIME OF PUBLICATION. CONTINUED PRODUCT IMPROVEMENTS MAKE SPECIFICATIONS AND MEASUREMENTS SUBJECT TO CHANGE WITHOUT NOTICE.

NOTES:

1. WHEN INSTALLING THIS UNIT, LOCAL, STATE OR FEDERAL CODES SHOULD BE ADHERED TO FOR INSTALLATION PARAMETERS (DIMENSIONS, LOCATIONS) AND WASTE AND SUPPLY REQUIREMENTS OTHER THAN SHOWN.
2. FLOW ADJUSTMENT: REMOVE HEX NUT AND BUTTON. ADJUST FLOW WITH SCREWDRIVER; CLOCKWISE FOR MORE FLOW, COUNTERCLOCKWISE FOR LESS. IF DESIRED FLOW IS NOT OBTAINED, MAKE SURE SCREWDRIVER STOP IS FULLY OPEN. REINSTALL BUTTON AND HEX NUT.

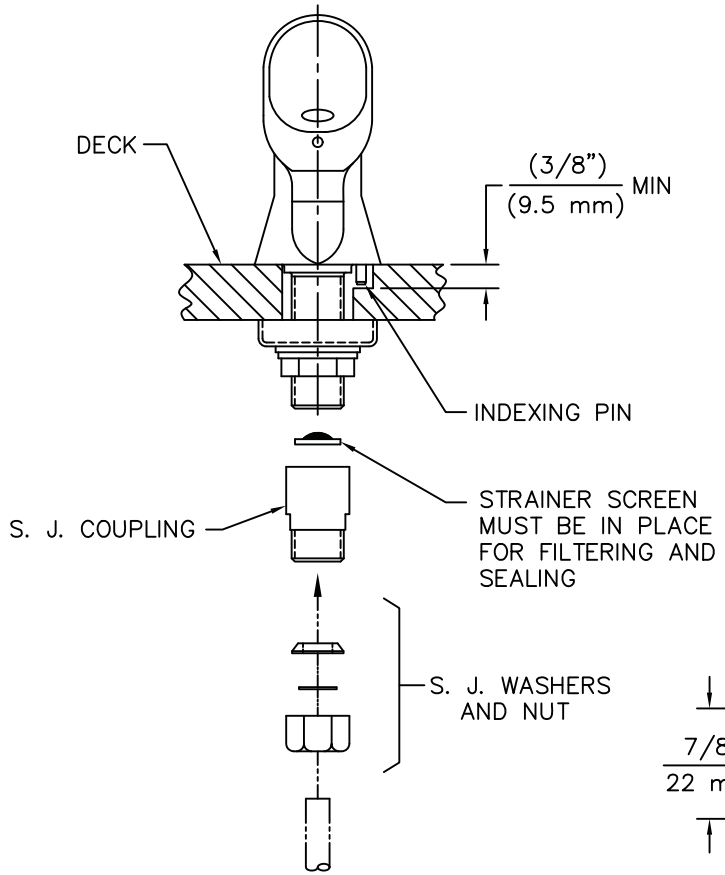

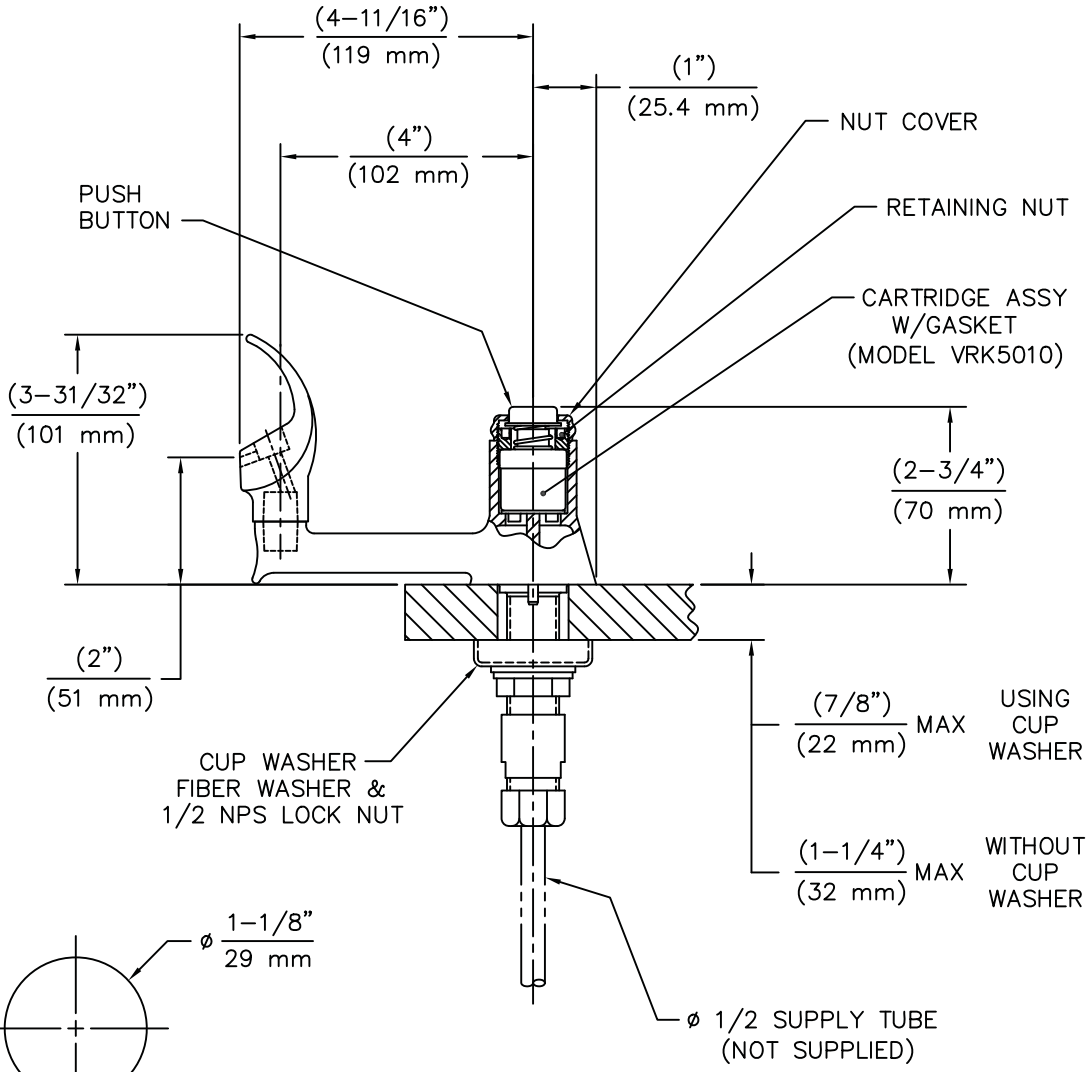

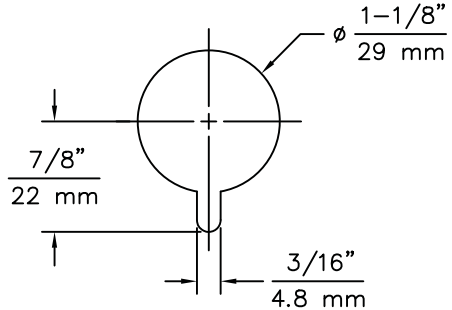

MOUNTING HOLE
SCALE: 2/1

Haws corporation
INFO FAX : 1–888–FAX–HAWS (1–888–329–4297)
1455 Kleppe Ln, Sparks NV, 89431
Phone: 775–359–4712 Fax: 775–359–7424
Haws Ag Bachweg 3 CH–3401 Burgdorf Switzerland
Haws Mfg Pte Ltd 74 Sungei Kadut Loop Singapore 729531
e–mail: Haws@hawsco.com website: www.hawsco.com

ECR NO.	REVISED PER	BY:
	ECN: 3907	HM
DRAWN: RTM	DATE: 07/99	CHK'D.:
APPROVED:	DATE:	

MODEL(S): 5017LF
INFO FAX DOC #: 250173
SCALE: 1:3 | DRAWING TYPE: INSTALLATION/FAXBACK

PART NUMBER: 0002077512
DRAWING NUMBER: 14148C00 REV. 7
SIZE: A SHT. 1 OF 1

DWG. NO. 14148C00

©2006 Haws Corporation - All Rights Reserved HAWS® and other trademarks used in these materials are the exclusive property of Haws Corporation.