Mechanical Pressure Measurement

Bourdon Tube Pressure Gauge Type 111.10SP Sprinkler Gauge Standard Series

WIKA Datasheet 111.10SP

Applications

- Fire sprinkler systems
- Suitable for all media that will not obstruct the pressure system or attack copper alloy parts

Special features

- UL-listed (UL-393), United States and Canada
- Factory Mutual (FM) approved
- Reliable and economical

Standard Features

Design

EN 837-1 & ASME B40.100

Sizes

4" (100 mm)

Accuracy class

 \pm 3/2/3% of span (ASME B40.100 Grade B)

Ranges

0/80 psi, retard to 250 psi (air) 0/300 psi (water)

Working pressure

Steady: 3/4 of full scale value Fluctuating: 2/3 of full scale value Short time: full scale value

Operating temperature

Ambient: -40°F to 140°F (-40°C to 60°C) Media: 140°F (+60°C) maximum

Temperature error

Additional error when temperature changes from reference temperature of 68°F (20°C) ±0.4% for every 18°F (10°C) rising or falling. Percentage of span.

Bourdon tube

Material: copper alloy

C-type



Bourdon Tube Pressure Gauge Type 111.10SP

Pressure connection

Material: copper alloy 1/4" NPT lower mount (LM)

Movement

Copper alloy

Dial

White aluminum with stop pin; black and red lettering

Pointer

Black aluminum

Case

Black polycarbonate

Window

Snap-in clear polycarbonate

Approvals

UL listed (UL-393) Factory Mutual




Optional Extras

(not all options are UL or FM approved)

- Brass restrictor
- Friction-fit cover ring (requires steel case)
- Glass window (requires steel case & friction ring)
- Black-painted steel case
- Stainless steel case
- Special case colors
- Nickel-plated connection
- Custom dial layout
- Special threaded connection
- Custom dial layout
- Other pressure scales available:

bar, kPa, MPa, kg/cm² and dual scales

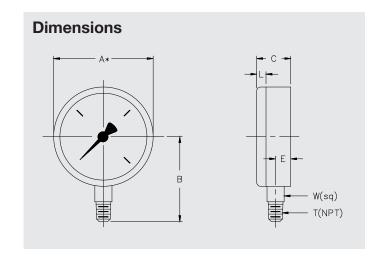

Size									
		Α	В	С	Е	L	Т	W	Weight
4"	mm	100	83.5	30	11.5	3.75		14	
	in	4.0	3.29	1.18	0.45	0.15	1/4"	0.55	0.35 lb.

Page 2 of 2

WIKA Datasheet 111.10SP 04/2007

WIKA Instrument Corporation



Pressure gauge model / Nominal size / Scale range / Size of connection / Optional extras required Specifications and dimensions given in this leaflet represent the state of engineering at the time of printing. Modifications may take place and materials specified may be replaced by others without prior notice.



