

PEX rails

Submittal information

Date submitted:

Project Information


Job name :	Location :
Engineer :	Date submitted:
Contractor :	Submitted by:
Manufacturer's representative :	Approved by :

Technical Data

Material Plastic

Product information and application use

Plastic PEX Rail secures Uponor PEX tubing products to metal, concrete and wood support structures. Note: Suitable fastening hardware is required (not included).

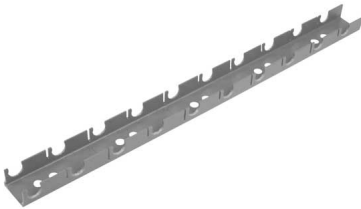

Part name	Part no.	Weight per UOM [lbs/UOM]
1/2" PEX Rail, 6.5 ft.	A5700500	1.1
5/8" PEX Rail, 6.5 ft.	A5700625	1
3/4" PEX Rail, 6.5 ft.	A5700750	1.35

Installation	Related applications
Lay out the tube rails parallel with the floor joists (perpendicular to the tubing layout direction). Space the rails 12 inches from the edge of the wall and 36 inches on center thereafter. Fasten the rails to the subfloor using 1" wood screws, liquid nails or silicone. Refer to the Uponor Radiant Installation Handbook for additional information.	Radiant Heating and Cooling Systems Turf Conditioning Systems Permafrost Prevention Systems Snow and Ice Melt Systems

Codes	Standards	Listings
-	-	-

Trademark Information	Contact information
ProPEX® is a registered trademark of Uponor Inc. ProPEX™ is a trademark of Uponor Ltd.	Uponor Inc. 5925 148th Street West Apple Valley, MN 55124 T 800.321.4739 F 952.891.2008 Uponor Ltd. 6510 Kennedy Road Mississauga, ON L5T 2X4 T 888.594.7726 F 800.636.9517