

DESCRIPTION

 Metal construction with a chrome plated. Platinum. LifeShine® Polished Brass, LifeShine® Satine or Glacier finish


OPERATION

- Pull-on/push-off operation of temperature and volume, rotational control of transfer valve
- Temperature operates through an 180° arc of handle travel (full cold to full hot)
- Adjustable temperature limit stop to control maximum hot water temperature
- 180° rotation of transfer valve handle with stops
- Pressure balancing mechanism maintains selected discharge temperature to ± 2°

STANDARDS

• Third party certified by CSA to meet CSA B-125, ASME A112.18.1M WARRANTY


- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



Villeta™ MOENTROL® with Built-In 3 Function Transfer Valve Trim

Models: T4100, T4100P, T4100PM, T4100W, T4100ST

> NOTE: See reverse side for illustrated parts

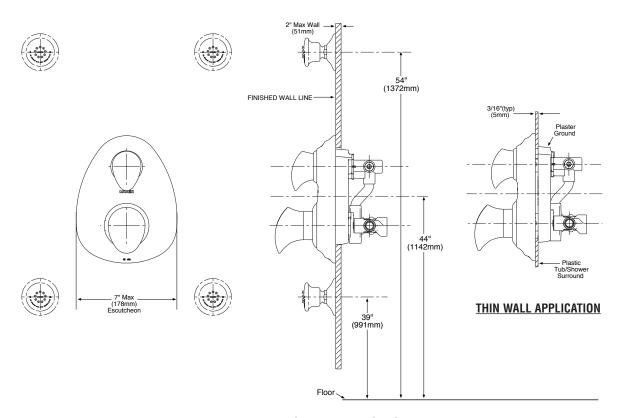

THICK WALL APPLICATION

CRITICAL DIMENSIONS

(DO NOT SCALE)




Order by Part Name and

Part Number (Bold Face Type)

VILLETA™ MOENTROL® with Built-In 3 Function Transfer Valve Trim

MODEL	HANDLE TYPE	<u>FINISH</u>
T4100	Knob	Chrome
T4100P	Knob	Polished Brass
T4100PM	Knob	Chrome
T4100W	Knob	Glacier
T4100ST	Knob	Satine

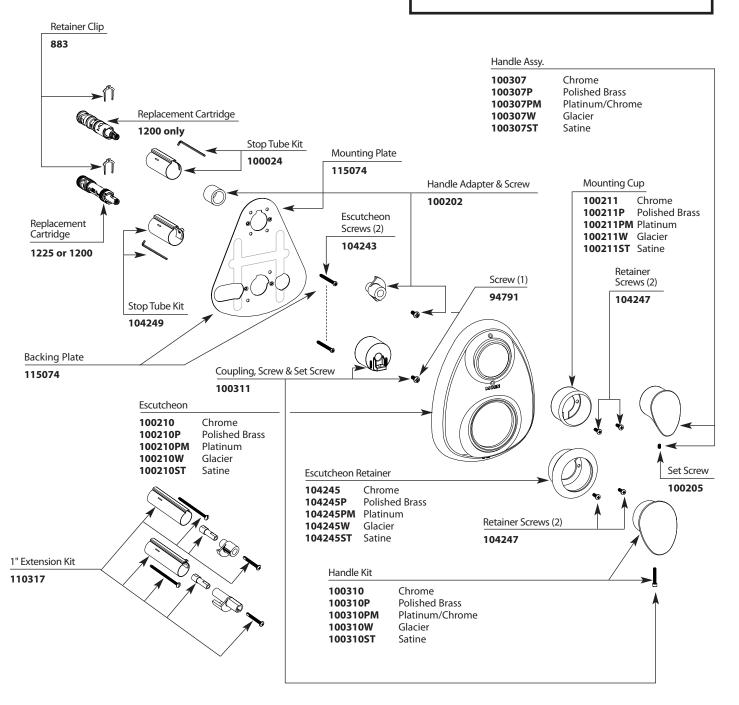



DESCRIPTION

- Metallic spray face and shell
- Brass swivel ball assembly
- Available in chrome plated, LifeShine® Polished Brass, Satine™, Black Opal, Classic Gold™, Nickel, Platinum or Glacier finish

OPERATION

FLOW


Single spray function

 Designed to deliver 2.5 gpm max (9.5 L/min) at 80 psi **STANDARDS**

• Designed and manufactured to comply with the requirements of: CSA B125 and ASME A112.18.1M and all requirements referenced therein


WARRANTY

· Warranted for one year against material or manufacturing defects




Small Single Function Body Spray

Models: A499, A499P, A499W, A499PM, A499ST, A499BP, A499CG, A499NL



Large Single Function Body Spray

Models: A500, A500P, A500W, A500PM, A500ST, A500BP, A500CG, A500NL

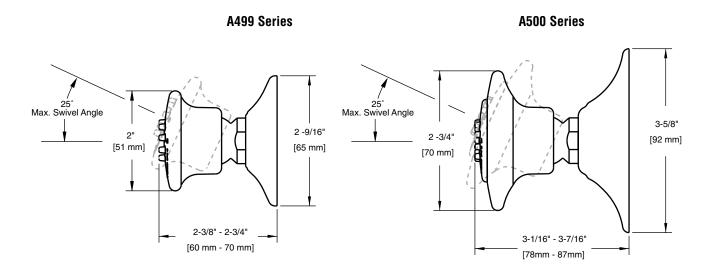

CRITICAL DIMENSIONS

(DO NOT SCALE)



DESCRIPTION

- Fixed mount showerhead, arm and flange
- Nonmetallic spray face
- Nonmetallic shell

OPERATION

Single spray


FLOW

• Designed to deliver 2.5 gpm (9.5 L/min) at 60 psi **STANDARDS**

 Third party certified by CSA to meet CSA B125 and ASME A112.18.1M and all applicable requirements referenced therein

WARRANTY

- Lifetime limited warranty against leaks, drips and finish defects to the original consumer purchaser
- 5 year warranty if used in commercial installations



EASY CLEAN® 400 Head, Arm and Flange


Models: 3912 (Chrome)

3912CP (Chrome/Pol. Brass)

3912P (Polished Brass)

3912W (Glacier)

3912ST (Satine/Pol. Brass)

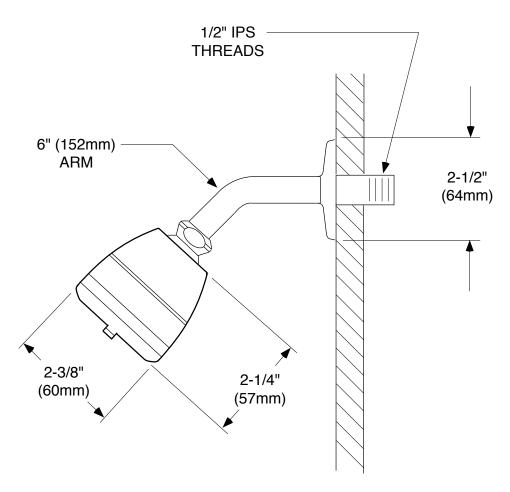

CRITICAL DIMENSIONS

(DO NOT SCALE)