

Job Name:

McGuire Manufacturing Co., Inc.

60 Grandview Court P.O. Box 746 • Cheshire, CT 06410 203-699-1801 • Fax: 203-699-1813 www.mcguiremfg.com


PRODUCT SPECIFICATION

Part No.

8872, 8902, 8902CNC, 8912, 8912CNC, 8903, 8904

Cast Body P-Trap With or Without Cleanout

Submittal Number:

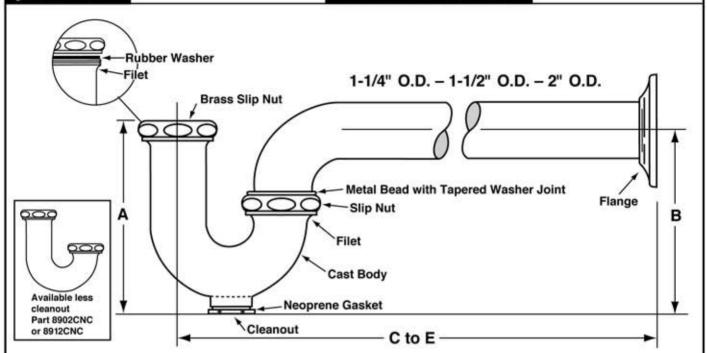

PROFESSIONAL LINE

ROUGHING MEASUREMENTS					
NO.	TRAP DIMENSIONS			72.	
	INLET	OUTLET	Α	В	C to E
8872	1-1/4"	1-1/4"	5"	4-1/2"	11"
8902	1-1/4"	1-1/2"	5"	4-1/2"	12"
8902CNC	1-1/4"	1-1/2"	4-5/8"	4-1/8"	12"
8912	1-1/2"	1-1/2"	5"	4-1/2"	12"
8912CNC	1-1/2"	1-1/2"	4-5/8"	4-1/8"	12"
8903	1-1/2"	2"	5"	6"	13"
8904	2"	2"	5"	6"	13"

FED SPEC W.W.P. 541 CAST BRASS P TRAP MINIMUM SEAL 2"

See options and accessories section for details on product variations.

ASME A112.18.1-2005/CSA B125-05

Specifications:

P-Trap shall be chrome plated cast brass body (with, without) cleanout, with 17 gauge seamless tubular wall bend, cast brass slip nuts. Reducing washers shall be used with reducing cast brass nut. With (shallow, deep, bell) (steel, brass) or (forged brass with set screw) flange. P-Trap shall be McGuire "Classic" Professional Line (8872C, 8902C, 8912C, 8903, 8904). Trap shall be certified by CSA or other recognized testing authority. P-Trap shall bear manufacturer and testing mark.