
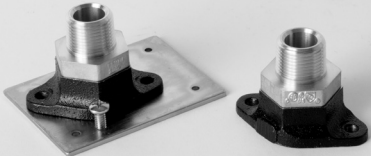
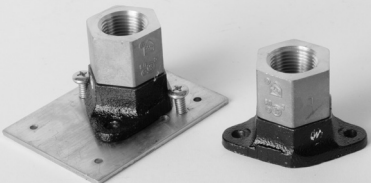




2.2.2 FITTINGS

COMPONENT	MATERIAL	CSST X NPS	
Adapter Nut	Nut: Brass Locknut: Steel	10M (3/8") x 3/4 15M (1/2") x 3/4 20M (3/4") x 1	

COMPONENT	MATERIAL	CSST X NPS	
Termination Fittings Male (Indoor and Outdoor*) <small>*Outdoor models supplied with o-rings</small>	Body: Brass Retainer: Brass Nut: Malleable Iron Gasket: Composite Fiber O-rings: EPDM Rubber	10M (3/8") x 1/2 15M (1/2") x 1/2 20M (3/4") x 3/4 25M (1") x 3/4 25M (1") x 1	

COMPONENT	MATERIAL	CSST X NPS	
Termination Fittings Female (Indoor and Outdoor*) <small>*Outdoor models supplied with o-rings</small>	Body: Brass Retainer: Brass Nut: Malleable Iron Gasket: Composite Fiber O-rings: EPDM Rubber	10M (3/8") x 1/2 15M (1/2") x 1/2 20M (3/4") x 3/4 25M (1") x 3/4	

COMPONENT	MATERIAL	CSST X NPS	
Flange Termination Fittings Male (Indoor and Outdoor*) <small>*Outdoor models supplied with o-rings</small>	Body: Brass Retainer: Brass Nut: Malleable Iron Gasket: Composite Fiber O-rings: EPDM Rubber	10M (3/8") x 1/2 15M (1/2") x 1/2 20M (3/4") x 3/4 25M (1") x 3/4 32M (1 1/4") x 1 1/4 38M (1 1/2") x 1 1/2 50M (2") x 2	

COMPONENT	MATERIAL	CSST X NPS	
Floor Flange Termination Assemblies Male	Body: Brass Retainer: Brass Nut: Malleable Iron Gasket: Composite Fiber	10M (3/8") x 1/2 15M (1/2") x 1/2 20M (3/4") x 3/4 25M (1") x 1	