



PORTRAIT™ VITREOUS CHINA LAVATORY WITH SHROUD

BEFORE YOU BEGIN

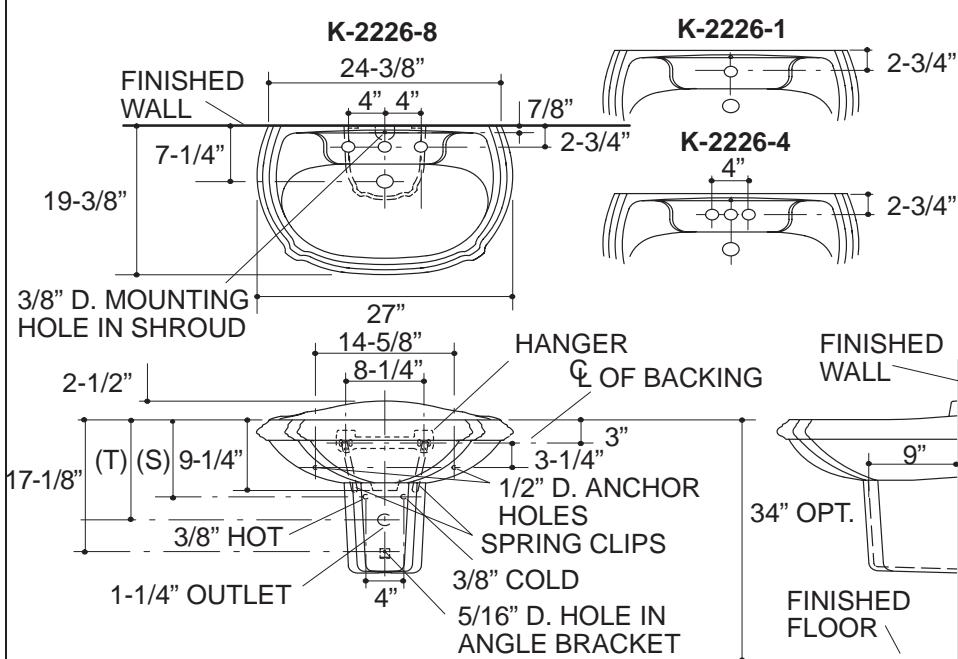
NOTES

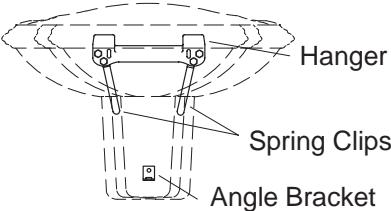
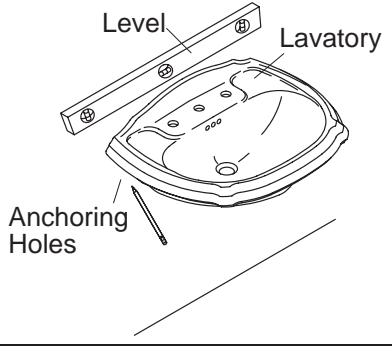


- Observe all local plumbing and building codes.
- Prior to installation, unpack the new lavatory and inspect it for damage. Return the lavatory to its protective carton until you are ready to install it.
- These instructions are for installing the lavatory to wood frame construction. For other installations, supply suitable bracing and fastening devices of sufficient size and strength.
- The walls and floor must be square, plumb, and level.

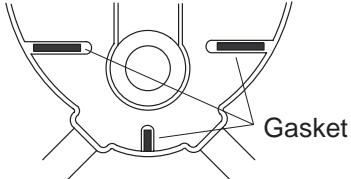

ROUGHING-IN

(S) Supply 10" (Based on 12" riser which may require cutting).

Fixture dimensions are nominal and conform to tolerances in ASME Standard A112.19.2M.



TOOLS REQUIRED	MATERIALS REQUIRED
<ul style="list-style-type: none"> • Level • Drill with assorted bits • Socket wrench with 8" extension and assorted sockets • Tape measure • Framing square 	<ul style="list-style-type: none"> • 1/4" lag bolts and washers (2)
INSTALLATION	
<ul style="list-style-type: none"> • Rough-in the supplies and drain piping and trap. 	
<p>NOTE: The supply stop handles cannot extend more than 3-3/4" from the finished wall when in the open position.</p>	
<ul style="list-style-type: none"> • Install sufficient backing behind the finished wall to provide a secure material for the anchoring devices. • Install hanger, spring clips, and angle bracket to wall according to roughing-in dimensions. Ensure spring clips are between hanger and wall before tightening. 	
<ul style="list-style-type: none"> • Position the lavatory on the hanger and level. 	
<ul style="list-style-type: none"> • Mark the center of each anchoring hole through the lavatory onto the wall. • Carefully remove the lavatory. 	
<ul style="list-style-type: none"> • Drill mounting holes for 1/4" lag bolts at the marks on the wall. 	
<ul style="list-style-type: none"> • Install the faucet and drain to the lavatory according to the manufacturer's instructions. <p>NOTE: Do not fully tighten slip-joint drain connections at this time.</p>	

<ul style="list-style-type: none"> Place the lavatory on hanger. Secure the lavatory to the wall with lag bolts and washers. <p>CAUTION: Risk of product damage. Do not overtighten lag bolts. Overtightening may cause damage to the product.</p>	
<ul style="list-style-type: none"> Connect and tighten the trap to drain. Connect the hot and cold water supplies to the faucet. Apply three self-adhesive gaskets (provided) on the bottom ribs of the lavatory. 	 <p>Bottom of Lavatory</p>
<ul style="list-style-type: none"> Place the shroud next to the wall and lift so flanges slide under the spring clips. Adjust as needed for proper fit. Insert mounting bolt with washer through hole in bottomside of shroud until it connects with angle bracket. Tighten. <p>CAUTION: Risk of product damage. Do not overtighten. Overtightening may cause damage to the product.</p>	

IMPORTANT CONSUMER INFORMATION

CARE AND CLEANING

To keep your lavatory looking new, make sure you rinse it out thoroughly after each use. DO NOT USE ABRASIVES on this product, as they will scratch and ruin the surface. Stubborn stains, paint, or tar can be removed with turpentine or paint thinner.

REQUESTING SERVICE

Please take a moment to familiarize yourself with the Kohler Warranty, its benefits, and limitations. Kohler Co. and its distributors support you with one of the largest Service Networks of its type. Here's what you need to do if you require service:

- FIRST:** Contact the dealer or contractor who sold and installed the product. They should be able to solve any problems you may have.
- SECOND:** If your dealer or contractor cannot solve the problem, they will contact or supply you with the name of the local Kohler Distributor and the:
 -  KOHLER TECHNICAL SPECIALIST
- THIRD:** If you are unable to obtain warranty service through either your contractor or Kohler Co. distributor, please write us directly at Kohler Co., Attn: Customer Service Department, 444 Highland Drive, Kohler, WI 53044 U.S.A.
- FOURTH:** Include all pertinent information regarding your claim, including a complete description of the product, model numbers, colors, finishes, and the date the product was installed. Include a description of the problem, and a photocopy of your invoice for the products involved. Also give us the name of the contractor and distributor.

LIMITED ONE-YEAR WARRANTY

Kohler plumbing fixtures and fittings are warranted free of manufacturing defects.

Kohler Co. will, at its election repair, replace, or make appropriate adjustment where Kohler Co. inspection discloses any such defects occurring in normal usage within one year after installation. Kohler Co. is not responsible for installation costs.

To obtain warranty service, contact Kohler Co. either through your Dealer or Plumbing Contractor or by writing Kohler Co., Attn: Customer Service Department, 444 Highland Drive, Kohler, WI 53044 U.S.A., or by calling **1-800-4-KOHLER** from within the U.S.A.

Implied warranties, including that of merchantability and fitness for a particular purpose, are expressly limited in duration to the duration of this warranty. To the extent permitted by law, Kohler Co. disclaims all implied warranties including merchantability and fitness for a particular purpose. Kohler Co. disclaims any liability for special, incidental, or consequential damages.

Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damages, so this limitation and exclusion may not apply to you. This warranty gives you specific legal rights. You may also have rights which vary from state to state.

This is our exclusive written warranty.

KOHLER CO., KOHLER, WISCONSIN 530442226