


FEATURES

- 75" x 45" x 25", (27-1/2" high with pillow)
- Acrylic
- Integral fill and valves
- System III - with two variable flow pumps with integral heater, and electronic switches
- Waterfall, 8 Flexjets, and 4 Riverjets
- UL Listed
- LESS ALL TRIM
- One large pillow and two small pillows
- Pumps are supplied with grounding-type plug-in cords

K-1360

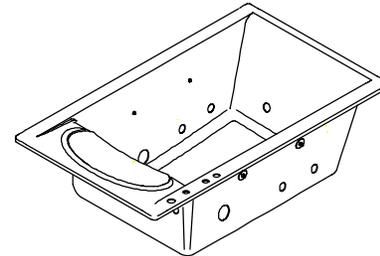

CODES/STANDARDS APPLICABLE

Specified model meets or exceeds the following:

- ANSI Z124.1
- ASME/ANSI A112.19.7M
- Underwriters Laboratories (UL)

COLORS/FINISHES

- 0 White
- Other Refer to Fixtures Price Book for additional colors

Accessories:

- CP Polished Chrome
- PB Polished Brass
- Other Refer to Faucets Price Book for additional finishes

SPECIFIED MODEL:

Model	Description	Colors/Finishes		
K-1360	RiverBath Quadrangle	<input type="checkbox"/> 0 White	<input type="checkbox"/> Other_____	
Required Accessories				
K-9661	Flexjet trim kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-9669	Grip rail kit	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T9540-4	Transfer valve trim, lever handle OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T9540-7	Transfer valve trim, round handle	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-6526	Traditional Handshower OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-6528	MasterShower™ Handshower OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-9677	Persona Handshower	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T6919-2	Alterna™ faucet handles OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T6919-4	Alterna™ faucet handles	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T8232-2	Taboret® faucet handles OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T8232-4	Taboret® faucet handles OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T8232-4A	Taboret® faucet handles OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T8232-6	Taboret® faucet handles	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T16124-4	Revival™ faucet handles OR	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
K-T16124-4A	Revival™ faucet handles	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____
Recommended Accessory				
K-7167	Drain	<input type="checkbox"/> CP	<input type="checkbox"/> PB	<input type="checkbox"/> Other_____

PRODUCT SPECIFICATION:

The RiverBath Quadrangle shall be 75" in length x 45" in width, and 25" in height (27-1/2" in height with pillow). Bath shall be made of acrylic. Bath shall have integral fill and valves. Bath shall have System III, with 8 Flexjets, waterfall, 4 Riverjets, two variable flow pumps with integral heater, and electronic switches. Bath shall be UL listed. Bath shall be less all trim. Bath shall have one large pillow and two small pillows. Pumps shall be supplied with grounding-type plug-in cords. Bath shall be Kohler Model K-1360-_____.

RIVERBATH™ QUADRANGLE

REQUIRED ELECTRICAL SERVICE

Two separate dedicated circuits required, each protected with Class A Ground-Fault Circuit-Interrupter (GFCI):

Pump/control, (waterfall)	120 V., 20 A, 60 Hz
Pump/control, (jets)	120 V., 20 A, 60 Hz

PRODUCT INFORMATION

Fixture*:	basin area	top area	weight
Bathing well	46" x 34"	57" x 37"	205 lbs.
	water depth	capacity	
To overflow	20"	149 gal.	

* Approximate measurements for comparison only.

Pump: (Qty. 2)	HP	V	Hz	A
1-speed	1	120	60	16.5
1-speed	2	120	60	18.5

Included Components:

Cutout template	1000153-7
-----------------	-----------

INSTALLATION NOTES

NOTICE: Unless otherwise specified, floor support under RiverBath Quadrangle must provide for a minimum of 80 lbs./square foot loading.

Pumps are supplied with grounding-type plug-in cords. Locate the outlets behind the RiverBath Quadrangle, and within 24" of the pumps.

Consult local and national codes for minimum air gap requirements if installing a spout on the faucet deck other than that supplied.

Minimum 120 gallons of water is needed to run RiverBath Quadrangle river jets.


Roughing-In Notes

No change in measurements if connected with drain illustrated.

Cut-out	73-1/2" x 43-1/2"
---------	-------------------

Minimum access panel:

Pump/control	36" W x 22" H	required
--------------	---------------	----------

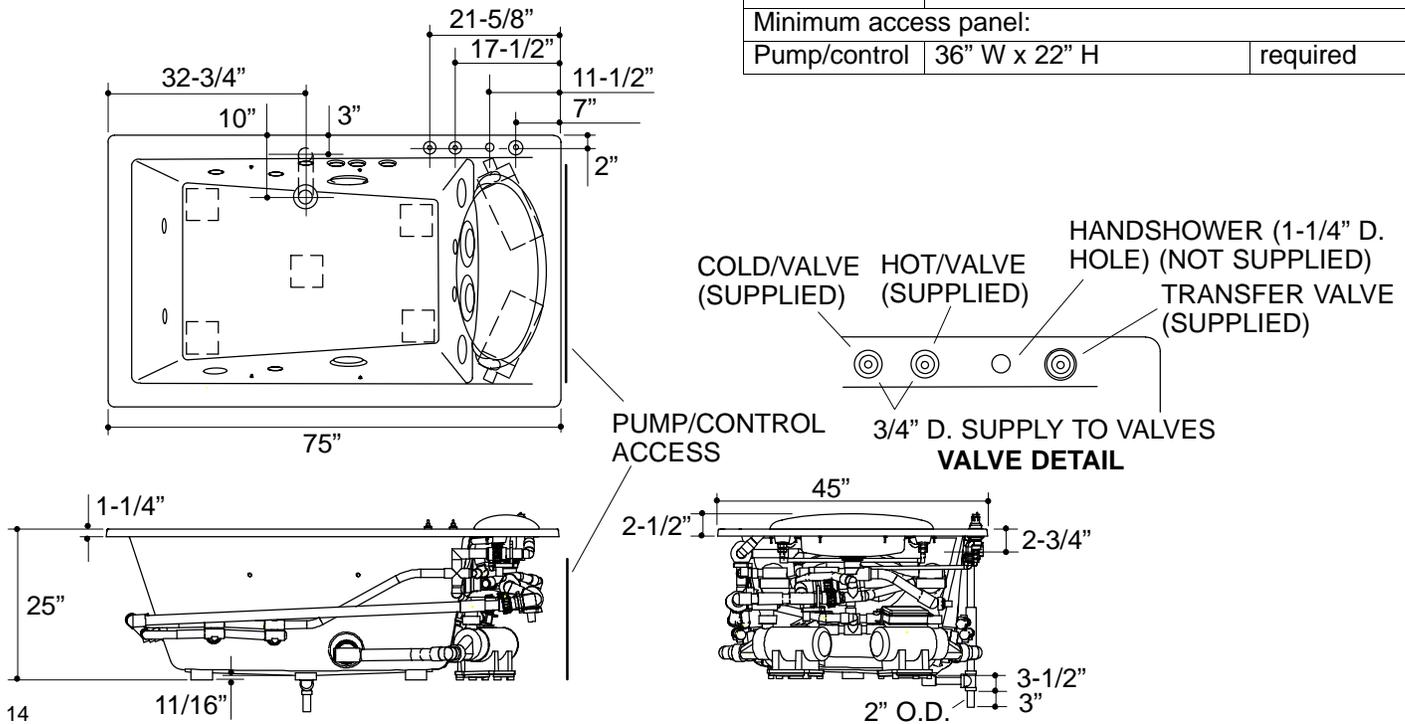

PRODUCT DIAGRAM