

STRUT CLAMPS



Clamp With Cushion

2501 - 2588


CLAMP MATERIAL: Low carbon steel

CUSHION MATERIAL: Multi-Flex TES A9110 EV1 Black, in accordance with ASTM D4474 TES 0130 A90000. Classified 2043 (25/50) for use in plenums and air handling systems.

TEMPERATURE RANGE: -65°F to 275°F (-54°C to 135°C)

FINISH: Western gold

ORDERING: Specify figure number.

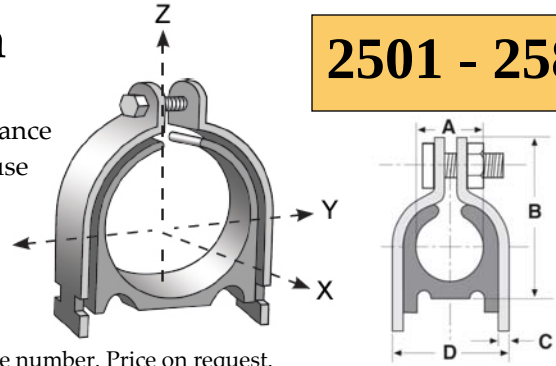

Available in stainless steel. To order, specify 304 or 316 and add suffix SS to figure number. Price on request.

Figure Number	O.D. Size A		Nom. Tube Size		Nom. Pipe Size		B		C		D		Standard Package	Max. Rec. Load						Wt. Each	
														X		Y		Z			
														Lbs.	kN	Lbs.	kN	Lbs.	kN	Lbs.	kg
2501	.25	(6.35)	1/8	(3)	-	-	1.11	(28.19)	.075	(1.91)	.62	(15.75)	30	50	(.22)	50	(.22)	400	(1.78)	.13	(.06)
2502	.375	(9.53)	1/4	(6)	-	-	1.24	(31.50)	.075	(1.91)	.75	(19.05)	30	50	(.22)	50	(.22)	400	(1.78)	.14	(.06)
2503	.5	(12.70)	3/8	(10)	-	-	1.36	(34.54)	.075	(1.91)	.87	(22.10)	30	50	(.22)	50	(.22)	400	(1.78)	.15	(.07)
2504	.625	(15.88)	1/2	(15)	-	-	1.5	(38.10)	.075	(1.91)	1	(25.40)	20	50	(.22)	50	(.22)	400	(1.78)	.16	(.07)
2505	.75	(19.05)	5/8	(17)	-	-	1.78	(45.21)	.075	(1.91)	1.33	(33.78)	20	75	(.33)	75	(.33)	600	(2.67)	.19	(.09)
2506	.875	(22.23)	3/4	(20)	-	-	1.91	(48.51)	.075	(1.91)	1.45	(36.83)	20	75	(.33)	75	(.33)	600	(2.67)	.21	(.09)
2515	1	(25.40)	-	-	-	-	2.03	(51.56)	.075	(1.91)	1.66	(42.16)	20	75	(.33)	75	(.33)	600	(2.67)	.29	(.13)
2507	1.125	(28.58)	1	(25)	-	-	2.16	(54.86)	.075	(1.91)	1.79	(45.47)	10	75	(.33)	75	(.33)	600	(2.67)	.31	(.14)
2516	1.25	(31.75)	-	-	-	-	2.3	(58.42)	.105	(2.67)	1.92	(48.77)	20	75	(.33)	75	(.33)	600	(2.67)	.33	(.15)
2508	1.375	(34.93)	1 1/4	(32)	-	-	2.75	(69.85)	.119	(3.02)	2.22	(56.39)	10	75	(.33)	75	(.33)	600	(2.67)	.42	(.19)
2517	1.5	(38.10)	-	-	-	-	2.75	(69.85)	.119	(3.02)	2.22	(56.39)	10	75	(.33)	75	(.33)	600	(2.67)	.38	(.17)
2509	1.625	(41.28)	1 1/2	(40)	-	-	3.03	(76.96)	.119	(3.02)	2.47	(62.74)	10	75	(.33)	75	(.33)	600	(2.67)	.48	(.22)
2518	1.75	(44.45)	-	-	-	-	3.03	(76.96)	.119	(3.02)	2.47	(62.74)	10	125	(.56)	125	(.56)	800	(3.56)	.46	(.21)
2519	1.875	(47.63)	-	-	-	-	3.28	(83.31)	.119	(3.02)	2.47	(62.74)	10	125	(.56)	125	(.56)	800	(3.56)	.52	(.24)
2520	2	(50.80)	-	-	-	-	3.28	(83.31)	.119	(3.02)	2.72	(69.09)	10	125	(.56)	125	(.56)	800	(3.56)	.50	(.23)
2510	2.125	(53.98)	2	(50)	-	-	3.53	(89.66)	.119	(3.02)	2.97	(75.44)	10	125	(.56)	125	(.56)	800	(3.56)	.57	(.26)
2521	2.25	(57.15)	-	-	-	-	3.78	(96.01)	.119	(3.02)	3.22	(81.79)	10	125	(.56)	125	(.56)	800	(3.56)	.62	(.28)
2523	2.5	(63.50)	-	-	-	-	4.03	(102.36)	.119	(3.02)	3.47	(88.14)	10	125	(.56)	125	(.56)	800	(3.56)	.60	(.27)
2511	2.625	(66.68)	2 1/2	(65)	-	-	4.03	(102.36)	.119	(3.02)	3.47	(88.14)	10	125	(.56)	125	(.56)	800	(3.56)	.58	(.26)
2524	3	(76.20)	-	-	-	-	4.52	(114.81)	.119	(3.02)	3.97	(100.84)	10	125	(.56)	125	(.56)	800	(3.56)	.69	(.31)
2512	3.125	(79.38)	3	(80)	-	-	4.52	(114.81)	.119	(3.02)	3.97	(100.84)	10	125	(.56)	125	(.56)	800	(3.56)	.68	(.31)
2513	3.625	(92.08)	3 1/2	(90)	-	-	5.03	(127.76)	.119	(3.02)	4.47	(113.54)	10	150	(.67)	200	(.89)	1000	(4.45)	.76	(.34)
2514	4.125	(104.78)	4	(100)	-	-	5.66	(143.76)	.119	(3.02)	5.09	(129.29)	10	150	(.67)	200	(.89)	1000	(4.45)	.88	(.40)
2525	5.125	(130.18)	5	(125)	-	-	6.75	(171.45)	.119	(3.02)	6.25	(158.75)	10	150	(.67)	200	(.89)	1000	(4.45)	1.17	(.53)
2526	6.125	(155.58)	6	(150)	-	-	7.75	(196.85)	.119	(3.02)	7.5	(190.50)	10	150	(.67)	200	(.89)	1000	(4.45)	1.28	(.58)
2530	.79	(20)	Metric Pipe		-	-	1.78	(45.21)	.07	(1.78)	1.33	(33.78)	20	75	(.33)	75	(.33)	600	(2.67)	.19	(.09)
2531	.98	(25)	Metric Pipe		-	-	2.03	(51.56)	.07	(1.78)	1.66	(42.16)	10	75	(.33)	75	(.33)	600	(2.67)	.29	(.13)
2532	1.26	(32)	Metric Pipe		-	-	2.30	(58.42)	.07	(1.78)	1.92	(48.77)	10	75	(.33)	75	(.33)	600	(2.67)	.33	(.15)
2533	1.57	(40)	Metric Pipe		-	-	2.75	(69.85)	.11	(2.79)	2.22	(56.39)	10	75	(.33)	75	(.33)	600	(2.67)	.48	(.22)
2534	1.97	(50)	Metric Pipe		-	-	3.28	(83.31)	.11	(2.79)	2.72	(69.09)	10	125	(.56)	125	(.56)	800	(3.56)	.50	(.23)
2535	2.48	(63)	Metric Pipe		-	-	4.03	(102.36)	.11	(2.79)	3.47	(88.14)	10	125	(.56)	125	(.56)	800	(3.56)	.60	(.27)
2536	2.95	(75)	Metric Pipe		-	-	4.52	(114.81)	.11	(2.79)	3.97	(100.84)	10	125	(.56)	125	(.56)	800	(3.56)	.62	(.28)
2537	3.54	(90)	Metric Pipe		-	-	4.91	(124.71)	.11	(2.79)	4.36	(110.74)	10	150	(.67)	200	(.89)	1000	(4.45)	.72	(.33)
2538	4.33	(110)	Metric Pipe		-	-	5.76	(146.30)	.11	(2.79)	5.30	(134.62)	10	150	(.67)	200	(.89)	1000	(4.45)	.94	(.43)
2539	4.92	(125)	Metric Pipe		-	-	6.55	(166.37)	.11	(2.79)	6.15	(156.21)	10	150	(.67)	200	(.89)	1000	(4.45)	1.06	(.48)
2540	6.30	(160)	Metric Pipe		-	-	7.95	(201.93)	.11	(2.79)	7.70	(195.58)	10	150	(.67)	200	(.89)	1000	(4.45)	1.43	(.65)
2574	.540	(13.72)	-	-	1/4	(5)	1.41	(35.81)	.075	(1.91)	.91	(23.11)	30	50	(.22)	50	(.22)	400	(1.78)	.16	(.07)
2575	.675	(17.15)	-	-	3/8	(10)	1.59	(40.39)	.075	(1.91)	1.07	(27.18)	30	75	(.33)	75	(.33)	600	(2.67)	.17	(.08)
2576	.840	(21.34)	-	-	1/2	(15)	1.91	(48.51)	.075	(1.91)	1.45	(36.83)	30	75	(.33)	75	(.33)	600	(2.67)	.21	(.10)
2577	1.050	(26.67)	-	-	3/4	(20)	2.16	(54.86)	.075	(1.91)	1.79	(45.47)	10	75	(.33)	75	(.33)	600	(2.67)	.31	(.14)
2578	1.315	(33.40)	-	-	1	(25)	2.75	(69.85)	.119	(3.02)	2.22	(56.39)	20	75	(.33)	75	(.33)	600	(2.67)	.43	(.20)
2579	1.660	(42.16)	-	-	1 1/4	(32)	3.03	(76.96)	.119	(3.02)	2.47	(62.74)	10	125	(.56)	125	(.56)	800	(3.56)	.48	(.22)
2580	1.900	(48.26)	-	-	1 1/2	(40)	3.28	(83.31)	.119	(3.02)	2.47	(62.74)	10	125	(.56)	125	(.56)	800	(3.56)	.52	(.24)
2581	2.375	(60.33)	-	-	2	(50)	3.78	(96.01)	.119	(3.02)	3.22	(81.79)	10	125	(.56)	125	(.56)	800	(3.56)	.61	(.28)
2582	2.875	(73.03)	-	-	2 1/2	(65)	4.27	(108.46)	.119	(3.02)	3.72	(94.49)	10	125	(.56)	125	(.56)	800	(3.56)	.62	(.28)
2583	3.500	(88.90)	-	-	3	(80)	4.91	(124.71)	.119	(3.02)	4.36	(110.74)	10	150	(.67)	200	(.89)	1000	(4.45)	.72	(.33)
2584	4.000	(101.60)	-	-	3 1/2	(90)	5.53	(140.46)	.119	(3.02)	4.97	(126.24)	10	150	(.67)	200	(.89)	1000	(4.45)	.88	(.40)
2585	4.500	(114.30)	-	-	4	(100)	6.03	(153.16)	.119	(3.02)	5.47	(138.94)	10	150	(.67)	200	(.89)	1000	(4.45)	.95	(.43)
2586	5.563	(141.30)	-	-	5	(125)	7.03	(178.56)	.135	(3.43)	6.47	(164.34)	10	150	(.67)	200	(.89)	1000	(4.45)	1.22	(.55)
2587	6.625	(168.28)	-	-	6	(150)	8.03	(203.96)	.135	(3.43)	7.47	(189.74)	10	150	(.67)	200	(.89)	1000	(4.45)	1.44	(.65)
2588	8.625	(219.08)	-	-	8	(200)	10.3	(261.62)	.135	(3.43)	9.38	(238.25)	10	150	(.67)	200	(.89)	1000	(4.45)	2.00	(.90)

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.