

ADJUSTABLE SWIVEL RING HANGERS



FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut that allows a vertical adjustment after installation, is tapped to NFPA reduced rod size standards. Fig. 141F has a layer of felt which separates the pipe from the hanger to reduce vibration and sound.

APPROVALS: Underwriters' Laboratories Listed in the U.S. (UL), Canada (CUL), and Factory Mutual Approved for sizes 3/4" to 8". Complies with Federal Specifications A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 10).

ORDERING: Specify pipe size and figure number.

Pipe Size	Rod Size A	B	Adj. C	D	E	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
1/2	3/8	1 7/8	1 7/16	2 3/4	3 1/16	300	.10
3/4	3/8	1 11/16	1 1/8	2 1/2	3 1/16	300	.10
1	3/8	1 5/8	1	2 1/2	3 3/16	300	.10
1 1/4	3/8	1 15/16	1 1/16	2 13/16	3 9/16	300	.11
1 1/2	3/8	2 1/8	1 1/16	3 1/8	3 7/8	300	.11
2	3/8	2 7/16	1 1/8	3 5/16	4 3/8	300	.14
2 1/2	3/8	3 1/16	1 5/8	3 15/16	5 3/8	525	.19
3	3/8	3 11/16	1 7/8	4 9/16	6 5/16	525	.23
3 1/2	3/8	3 3/4	1 7/8	4 5/8	6 5/8	525	.25
4	3/8	4 3/16	1 7/8	5 1/16	7 5/16	650	.30
5	1/2	4 5/8	1 5/8	5 5/8	8 3/8	1000	.50
6	1/2	5 5/8	2 1/4	6 1/2	9 13/16	1000	.58
8	1/2	6 13/16	2 7/16	7 15/16	12 1/4	1000	.90

Note: If ordering Fig. 141F felt lined hangers for pipe sizes of 3 1/2" or under, order the next largest size to allow for the thickness of the felt lining.

FUNCTION: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut, allows for vertical adjustment after installation. Fig. 151F has a layer of felt which separates the pipe from the hanger to reduce vibration and sound.

APPROVALS: Underwriters' Laboratories Listed in the U.S. (UL) and Factory Mutual Approved for all sizes. Complies with Federal Specification A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/SP-69 and SP-58 (Type 10).

ORDERING: Specify pipe size and figure number.


Pipe Size	Rod Size A	B	Adj. C	D	E	Max. Rec. Load/lbs.	Wt. Each (in lbs.)
2 1/2	1/2	2 3/4	1 1/4	3 11/16	5 1/8	600	.33
3	1/2	3 1/8	1 1/8	4	5 7/8	600	.35
3 1/2	1/2	3 5/8	1 1/2	4 5/16	6 5/8	600	.37
4	5/8	3 7/8	1 1/4	4 15/16	7 1/8	1000	.48
5	5/8	4 3/8	1 3/8	5 5/8	8 1/2	1000	.57
6	3/4	5 5/16	2	6 11/16	10 1/8	1250	1.06
8	3/4	6 15/16	2 5/8	8 5/16	12 7/8	1250	1.32

Note: If ordering Fig. 151F felt lined hangers for pipe sizes of 3 1/2" or under, order the next largest size to allow for the thickness of the felt lining.

Fig. 141 & 141F NFPA SWIVEL RING HANGER

Fig. 141 PRE-GALVANIZED

Fig. 141F PRE-GALVANIZED
WITH FELT LINING

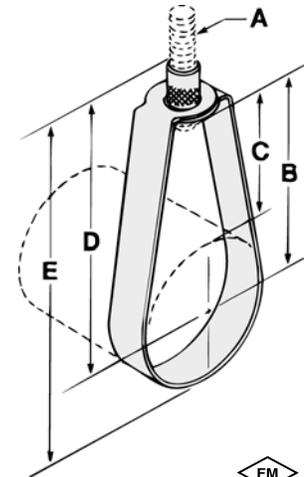


MATERIAL: Low carbon steel

Fig. 151 & 151F SWIVEL RING HANGER

Fig. 151 PRE-GALVANIZED

Fig. 151F PRE-GALVANIZED
WITH FELT LINING

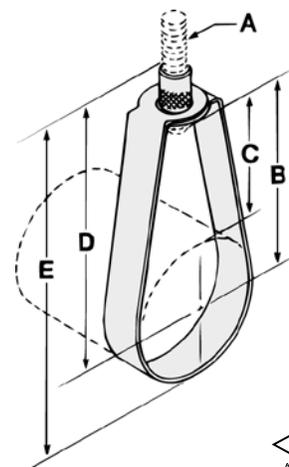

MATERIAL: Low carbon steel