




Position	Count	Description	Unit price
	1	<p>Unilift KP 250 M 1</p>  <p>Product photo could vary from the actual product</p> <p>Product No.: 012DC001 Submersible drainage pump</p> <p>Vertical single-stage stainless steel submersible pump with vertical discharge port and integrated submersible 1-phase canned motor in insulation class F with thermal overload protection.</p> <p>The pump is fitted with a suction strainer, a carrying handle and is supplied with a 10 ft mains cable.</p> <p>The impeller is a semi-open impeller for 10 mm free passage suitable for pumping groundwater, surface water, rain water and similar liquids.</p> <p>The pump has a double shaft seal consisting of two lip seals with grease in-between.</p> <p>The pump has an outer casing ensuring continuous cooling of the motor by the pumped liquid. The rotor shaft operates in two maintenance-free carbon bearings cooled by the pumped liquid</p> <p>The motor is filled with a non-toxic motor liquid.</p> <p>Liquid: Liquid temperature range: 32 .. 122 °F</p> <p>Technical: Type of impeller: Semi-open Approvals on nameplate: UL Listed, CSA</p> <p>Materials: Material, pump housing: Stainless steel 1.4301 DIN W.-Nr. 304 AISI</p>	On request

Position	Count	Description	Unit price
		Material, impeller: Stainless steel 1.4301 DIN W.-Nr. 304 AISI Installation: Size, pump outlet: 1 1/4" NPT Maximum installation depth: 32.8 ft Electrical data: Power input (P1): 480 W Mains frequency: 60 Hz Rated voltage: 1 x 115 V Rated current: 4.9 A Starting current: 14.5 A Capacitor size - run: 20 µF/250 V Enclosure class (IEC 34-5): IP68 Insulation class (IEC 85): F Length of cable: 10 ft Type of cable plug: US Others: Shipping volume: 0.44 ft ³	





Company name: -
 Created by: -
 Phone: -
 Fax: -
 Date: -

Description	Value
Product name:	Unilift KP 250 M 1
Product Number:	012DC001
EAN number:	5700391248122
Technical:	
Head max:	? ft
Type of impeller:	Semi-open
Approvals on nameplate:	UL Listed, CSA
Materials:	
Material, pump housing:	Stainless steel 1.4301 DIN W.-Nr. 304 AISI
Material, impeller:	Stainless steel 1.4301 DIN W.-Nr. 304 AISI
Installation:	
Size, pump outlet:	1 1/4" NPT
Maximum installation depth:	32.8 ft
Inst dry/wet:	D/S
Inst hori/verti:	horizontal or vertical
Liquid:	
Liquid temperature range:	32 .. 122 °F
Electrical data:	
Power input (P1):	480 W
Mains frequency:	60 Hz
Rated voltage:	1 x 115 V
Rated current:	4.9 A
Starting current:	14.5 A
Capacitor size - run:	20 µF/250 V
Enclosure class (IEC 34-5):	IP68
Insulation class (IEC 85):	F
Motor protection:	CONTACT
Thermal protec:	internal
Length of cable:	10 ft
Type of cable plug:	US
Others:	
Shipping volume:	0.44 ft³
Sales region:	Namreg

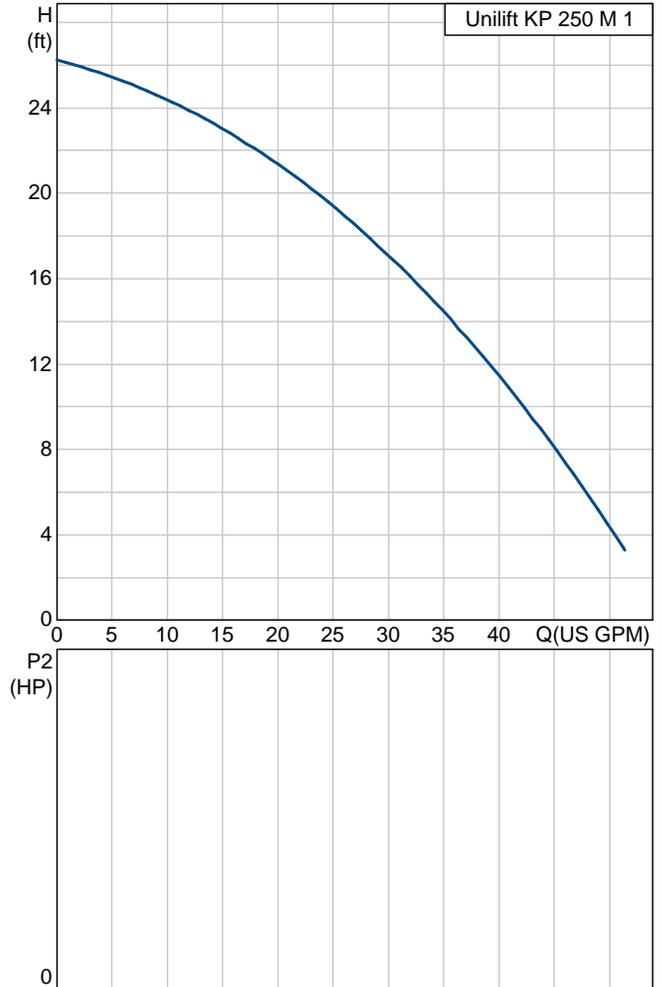

012DC001 Unilift KP 250 M 1

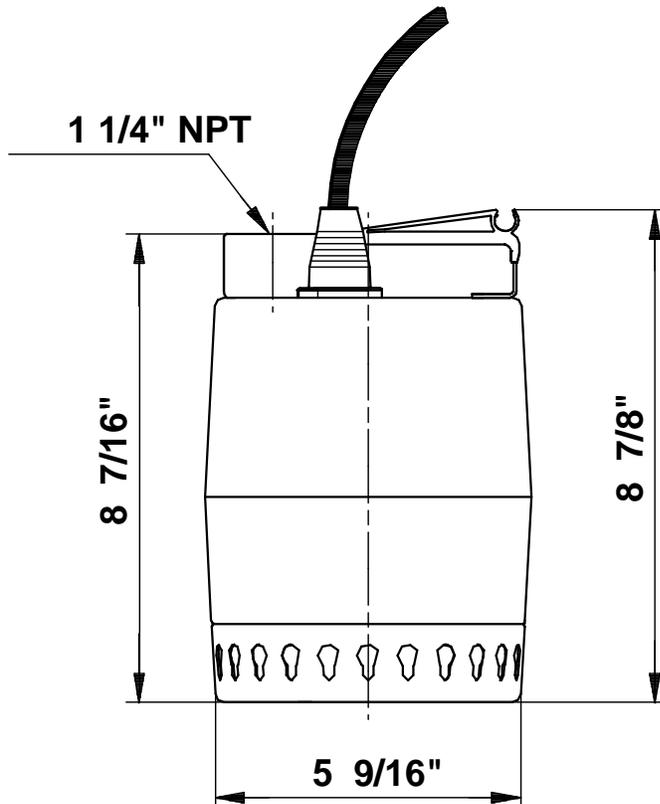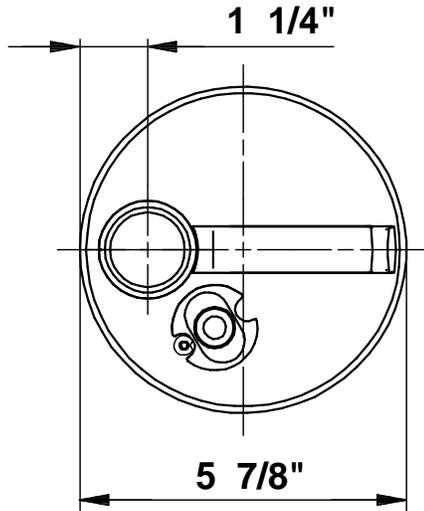

All units are [mm] unless otherwise presented.