



TELESCOPING SCAFFOLD

MODEL ATS-72

500lb

LOAD CAPACITY

Combined Weight of User and Materials
Evenly Distributed




CLIMB-READY IN MINUTES

- Easily navigate through jobsites, hallways, and elevators
- Quick set up with intuitive, color-coded labels
- Simple, one-person assembly
- Innovative design allows fast height adjustments up to 6ft 6in, allowing a reach height of 13ft 1in



SCAFFOLDING THAT GOES WHERE OTHERS CAN'T

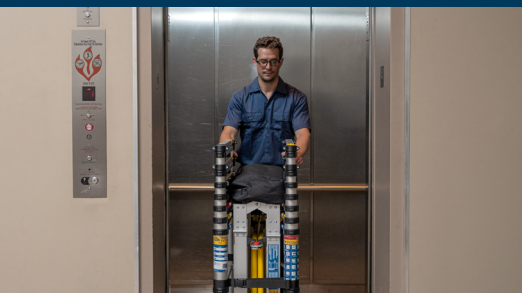

Packed & Ready to Roll



Quick & Easy Setup



Telescope to Multiple Heights



TELESCOPING SCAFFOLD

MODEL ATS-72

500lb

LOAD CAPACITY

Combined Weight of User and Materials

Guard rail

Trap door

Toe board

Non-slip
working
platform

Color-coded
labels

FEATURES

- Integrated 39 in guardrail & toe board system for added safety
- Non-slip work platform & extra-large trap door for secure access
- Adjustable outriggers & bubble level to ensure stability
- Pinch-resistant sections for safer climbing
- Color-coded labels for straightforward assembly
- Recommended for indoor use

5 ADJUSTABLE HEIGHTS



3ft 7in Platform Height 10ft 3in Avg Reach Height*	4ft 3in Platform Height 10ft 11in Avg Reach Height*	5ft 1in Platform Height 11ft 9in Avg Reach Height*	5ft 8in Platform Height 12ft 3in Avg Reach Height*	6ft 6in Platform Height 13ft 1in Avg Reach Height*
---	--	---	---	---

SPECIFICATIONS

Model No.	Material	Full Extension Height	Stowed Height	Approx. Product Weight	Load Capacity
ATS-72	Aluminum	9ft 9in	32in	132 lbs.	500 lbs.

Pinch-resistant sections



Adjustable outriggers



Scan for
Product Info



* Assumes a 5ft 7in person with a vertical 12in reach