

Features

- Integral flange.
- Left drain.
- Integral lumbar support.
- Integral apron.
- 60" (1524 mm) x 32" (813 mm) x 16-1/4" (413 mm)

Material

- Cast iron with Safeguard® finish.

Installation

- Alcove

Recommended Accessories

- K- 1491 Bath/Whirlpool Pillow
- K- 1601 Bath/Whirlpool Footstop
- K-7160-AF
- K- 7213 27" Cable Bath Drain
- K- 7214 27" Cable Bath Drain



ADA

CSA B651

OBC

Codes/Standards

ASME A112.19.1/CSA B45.2
ADA
ICC/ANSI A117.1
CSA B651
OBC


KOHLER® Lifetime Limited Warranty for Cast Iron Components

See website for detailed warranty information.

Available Color/Finishes

Color tiles intended for reference only.

Color	Code	Description
	0	White
	96	Biscuit
	47	Almond

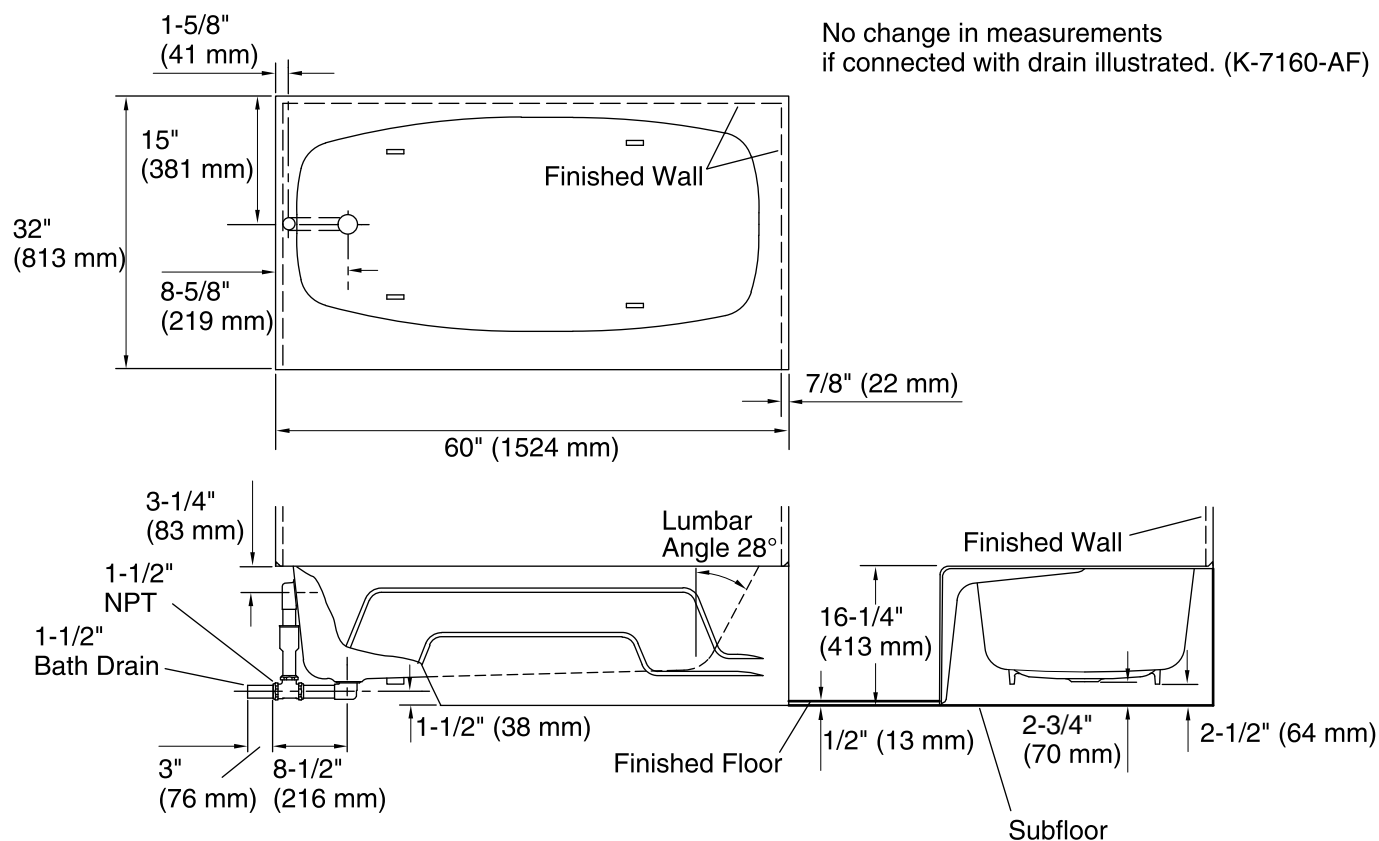

Technical Information

All product dimensions are nominal.

Installation: 3-Wall Alcove

Drain location: Left

Basin area, bottom: 41" x 22" (1041 mm x 559 mm)

Basin area, top: 54" x 25" (1372 mm x 635 mm)

Weight: 345 lbs (156.5 kg)

Minimum floor load: 50 lbs/ft² (244.1 kg/m²)

Water depth: 8-5/8" (219 mm)

Water capacity: 35 gal (132.5 L)

Notes

Measure your actual product for rough-in details.

Install this product according to the installation instructions.

The hot water supply should be 70% of the capacity of the bath or greater. Installations will vary.

NOTICE: By design, the apron is not perpendicular. The bottom edge of the apron angles out approximately 3/4" (19 mm) from the top of the rim.

ADA, OBC, CSA B651 compliant when installed to the specific requirements of these regulations.