



PIPE THREAD SEALANTS Industry professionals rely on thread compounds and sealants to help get the job done right. Made to highest quality standards and engineered to withstand some of the toughest environments, you can trust these products to help do the job faster, better, and safer.

53

PIPE THREAD SEALANTS


Slic-tite® Stik with PTFE Premium thread sealant in a stick

- Pressures: 500 PSI (34 BAR) for gas; 5,000 PSI (340 BAR) for liquid
- Sealing temperature: -50°F to 350°F (-46°C to 177°C)
- Contains PTFE particles for greater sealing power
- Washes off hands and clothes easily; quick and easy cleanup
- Safe, non-toxic, non-drying
- DO NOT USE ON OXYGEN SERVICE; USE OXY-TITE PASTE OR SLIC-TITE PTFE TAPE



Case Quantity 24

Part No.	Size
41600	1-1/4 oz.

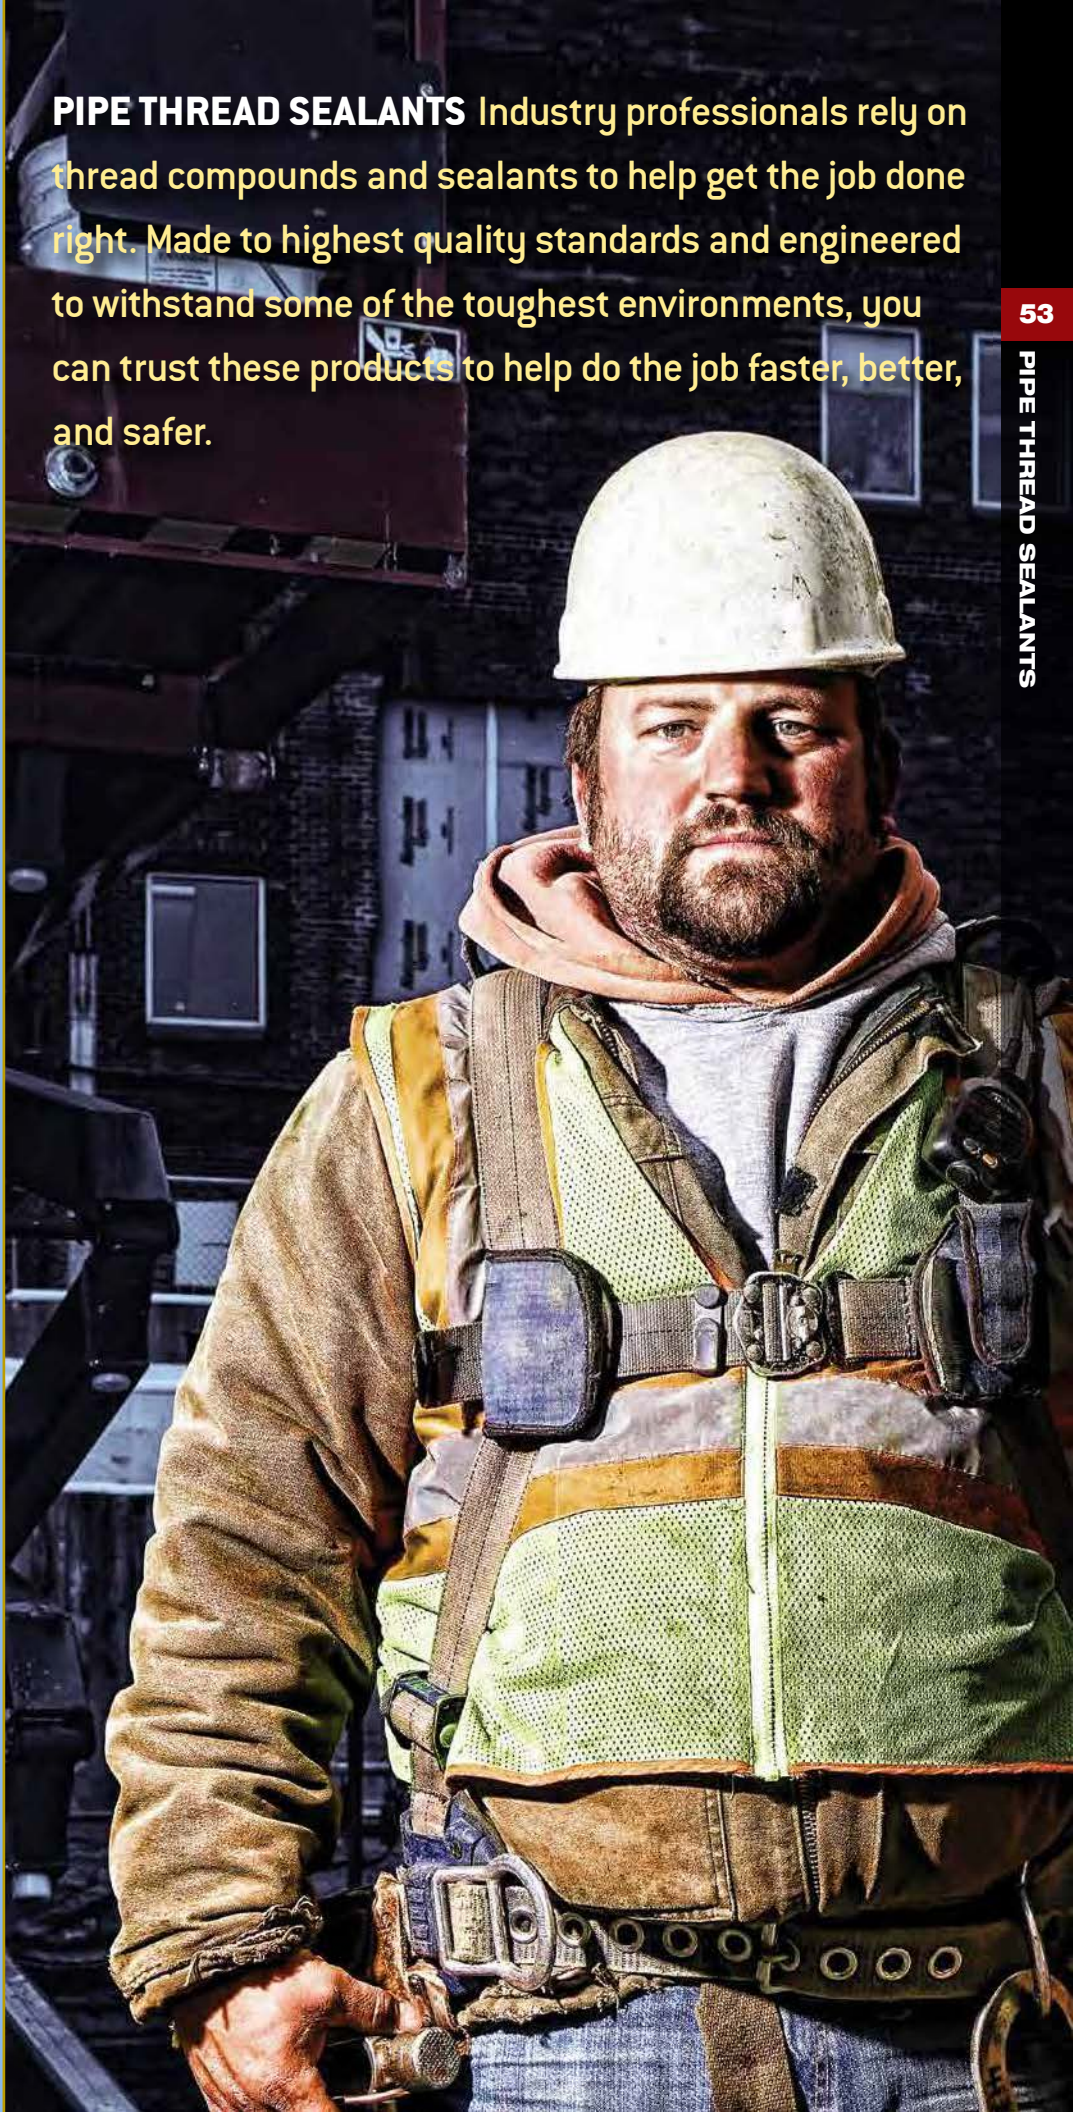



Slit-tite® Paste with PTFE
Heavy-duty pipe thread compound

- Contains PTFE for greater sealing power
- Pressures: 3,000 PSI (204 BAR) for gas; 10,000 PSI (680 BAR) for liquid
- Sealing temperature: -50°F to 500°F (-46°C to 260°C)
- Can be used on a variety of metals and plastic, eliminating the need for any other thread sealant
- Washes off hands and clothes easily; quick and easy cleanup
- Safe, non-toxic, non-drying
- DO NOT USE ON OXYGEN SERVICE; USE OXY-TITE PASTE OR SLIC-TITE PTFE TAPE



Part No.	Size	Case Quantity
42009	1/4 pt. Brush-in-cap	24
42019	1/2 pt. Brush-in-cap	24
42012	1 pt.	24
42029	1 pt. Brush-in-cap	24
42013	1 qt.	12
42049	1 pt. Brush-in-cap	12
42014	1 gal.	4
42015	5 gal.	Pail
42069	55 gal.	Drum



LEAK-TITE® Blue
Economical thread sealant with PTFE

- Pressures: 1,500 PSI (102 BAR) for gas; 5,000 PSI (340 BAR) for liquid
- Sealing temperature: -50°F to 500°F (-46°C to 260°C)
- Contains PTFE particles for greater sealing power
- Will not harden or dry out over time, remaining flexible for easy disassembly
- Safe, non-toxic, contains no solvents
- Washes off hands and clothes easily; quick and easy cleanup
- DO NOT USE ON OXYGEN SERVICE; USE OXY-TITE PASTE OR SLIC-TITE PTFE TAPE



Case Quantity 24	
Part No.	Size
46009	1/4 pt. Brush-in-cap



T-O-T®
Pipe thread compound

- Pressures: 350 PSI (24 BAR) for gas; 500 PSI (34 BAR) for liquid
- Sealing temperature: up to 350°F (177°C)
- No-drip siliconized formula for fast application on metal threads
- Lead-free, non-toxic, no V.O.C.'s
- DO NOT USE ON OXYGEN SERVICE; USE OXY-TITE PASTE OR SLIC-TITE PTFE TAPE



Case Quantity 24	
Part No.	Size
12219	1/2 pt. Brush-in-cap



PIPETITE® Paste
Soft set pipe thread compound

- Pressures: 2,600 PSI (177 BAR) for gas; 5,000 PSI (340 BAR) for liquid
- Sealing temperature: up to 400°F (204°C)
- No V.O.C.'s
- DO NOT USE ON OXYGEN SERVICE; USE OXY-TITE PASTE OR SLIC-TITE PTFE TAPE



Case Quantity 24	
Part No.	Size
12109	1/4 pt. Brush-in-cap
12110	1/2 pt. Brush-in-cap



PIPETITE-Stik®
Thread sealant in a stick

- Pressures: 350 PSI (24 BAR) for gas; 2,000 PSI (136 BAR) for liquid
- Sealing temperature: up to 350°F (177°C)
- Safe, non-toxic, non-drying
- DO NOT USE ON OXYGEN SERVICE; USE OXY-TITE PASTE OR SLIC-TITE PTFE TAPE



Part No.	Size	Case Quantity
11175	Standard Size - 1-1/4 oz.	144
11176	King Size - 4 oz.	72



OXY-TITE®
Pipe thread sealant for oxygen systems

- PTFE thread sealant specifically formulated for oxygen services
- Pressures: 2,600 PSI (180 BAR) for oxygen gas
- Sealing temperature: -320°F to 450°F (-196°C to 232°C)
- No V.O.C.'s



Case Quantity 6	
Part No.	Size
42805	4 oz.