


**Z1902****12 X 12 [305 X 305] A.R.E. SANI-FLOR RECEPTOR w/
10 [254] SUMP DEPTH****SPECIFICATION SHEET****TAG _____**

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

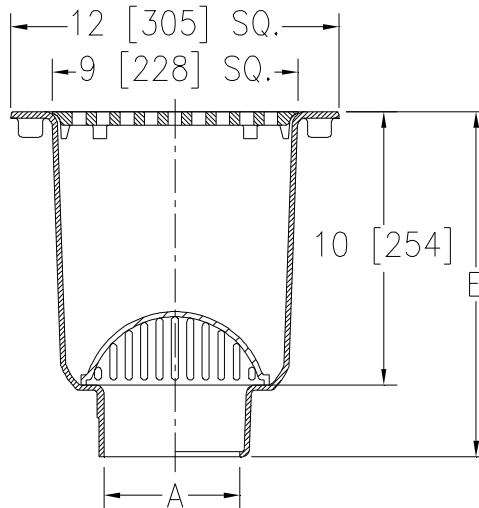

A -Pipe Size in [mm]	Approx Wt. lbs.[kg]	Grate Open Area in ² [cm ²]
2, 3, 4 [51, 76, 102]	36 [13]	31 [200]

ENGINEERING SPECIFICATION: ZURN Z1902

Sani-Flor Receptor 12" x 12" x 10" [305mm x 305mm x 254mm] Deep cast iron body and square, light-duty grate with 1/2" [13mm] slotted openings, white acid resisting porcelain enamel interior and top, complete with white ABS anti-splash interior bottom dome strainer.

OPTIONS (Check/specify appropriate options)**PIPE SIZE**

3, 4 [76, 102]
2, 3, 4 [51, 76, 102]
2, 3, 4 [51, 76, 102]

OUTLET (Specify size/type)

_____ IC Inside Caulk
_____ NH No-Hub
_____ NL Neo-Loc

'E' BODY HT. DIMENSION

Z	ZN / ZS
12-5/8 [321]	13-1/8 [333]
12-5/8 [321]	13-1/8 [333]
12 [305]	12-1/2 [318]

PREFIXES

- _____ Z Cast Iron Body w/ White A.R.E. Interior*
_____ ZN Cast Iron Body w/ White A.R.E. Interior, 12-1/2 [318] Square N.B. Frame and Full Grate w/ 1/2 [13] Square Openings (Add 1/2 [13] to 12 [305] Dim.)
_____ ZS Cast Iron Body w/ White A.R.E. Interior, 12-1/2 [318] Square Stainless Steel Frame and Full Grate w/ 1/2 [13] Square Openings (Add 1/2 [13] to 12 [305] Dim.)

SUFFIXES

- | | |
|---|--|
| _____ -DX Dex-O-Tex Flange (ZN Only) | _____ -4 Full Grate w/ Center Opening (2 [51] Dia. for Z) and (3-1/32 [77] Square for ZN & ZS) |
| _____ -HD Stainless Steel Frame w/ Extra-Heavy Duty Stainless Steel Grate (ZS Only) | _____ -6 Grate w/ 6 [152] Dia. x 6 [152] High Funnel |
| _____ -HP Heel-Proof Grate (ZN Only) | _____ -8 Grate w/ 8-7/8 x 3-5/8 x 3-3/4 [225 x 92 x 95] High Oval Funnel |
| _____ -K Anchor Flange | _____ -11 Vandal-Proof Secured Grate (ZN & ZS Only) |
| _____ -KC Anchor Flange w/ Seepage Holes and Clamp Collar | _____ -15 Solid Loose Set Cover (Z & ZN Only) |
| _____ -LD (Less) Bottom Dome Strainer | _____ -19 Full Hinged Grate (ZN Only) |
| _____ -P 1/2 [13] Trap Primer Connection (See Z1023) | _____ -23 Aluminum Bucket |
| _____ -SA Stabilizer Assembly (See Z1903) | _____ -25 White A.R.C. Bucket |
| _____ -TC Neo-Loc Test Cap Gasket (2, 3, 4 [51, 76, 102] NL Bottom Outlet Only) | _____ -31 Stainless Steel Mesh Liner for Bucket |
| _____ -VPS Vandal-Proof Strainer | _____ -32 Aluminum Dome Strainer |
| _____ -1 (Less) Grate | _____ -33 White A.R.C. Anti-Splash Bottom Dome Strainer |
| _____ -2 1/2 Grate | |
| _____ -3 3/4 Grate | |

* Regularly furnished unless otherwise specified.

Zurn Industries, LLC | Specification Drainage Operation
1801 Pittsburgh Avenue, Erie, PA U.S.A. 16502 · Ph. 855-663-9876, Fax 814-454-7929
In Canada | **Zurn Industries Limited**
3544 Nashua Drive, Mississauga, Ontario L4V 1L2 · Ph. 905-405-8272, Fax 905-405-1292
www.zurn.com

Rev. M
Date: 09/28/2017
C.N. No. 138076
Prod. | Dwg. No. Z1902