
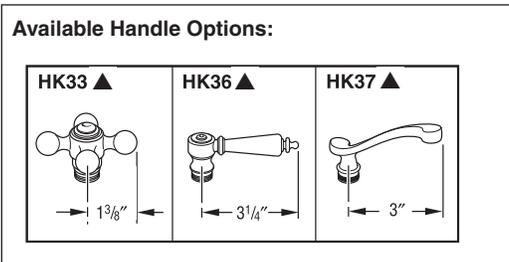


Submitted Model No.: _____

Specific Features: _____

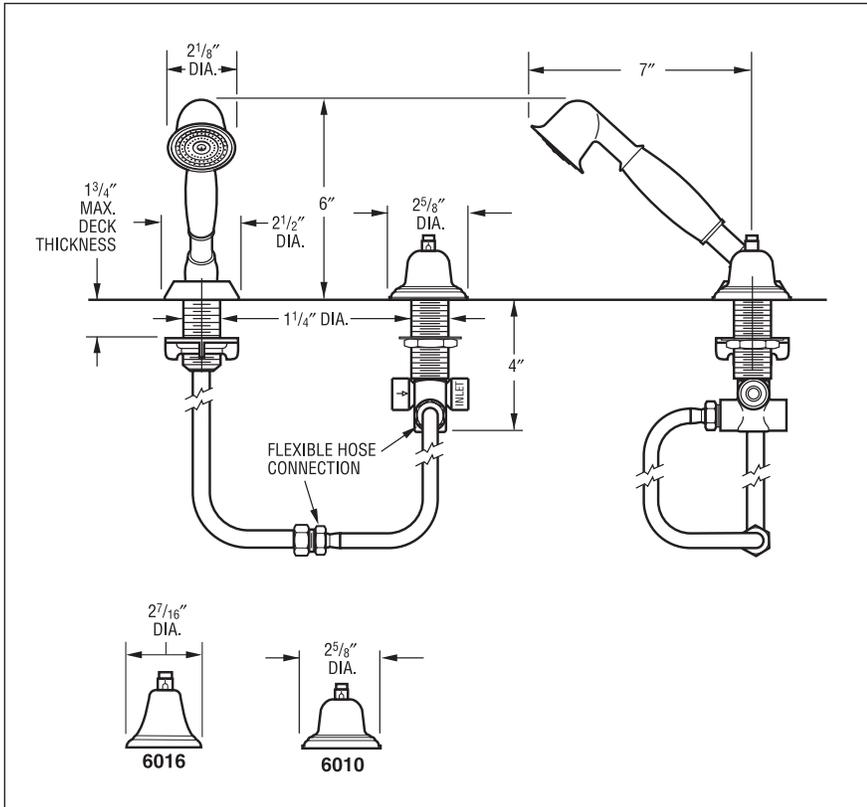

▲ Designate proper finish suffix

◆ Your Brizo Faucet hand shower incorporates a backflow protection system that has been tested to be in compliance with ASME A112.18.3, CSA B125.1 and ASME A112.18.1. It incorporates two certified check valves in series, which operate independently and are integral, non-serviceable parts of the wand assembly.

BRIZO[®]

SPECIALTY FAUCETS

- Traditional
- Hand-Held Shower
- Ledge Mount
- Ceramic Disc Valving
- Certified Dual Check Valves

STANDARD SPECIFICATIONS:

- Roman tub hand-held shower.
- Ceramic disc valving.
- 2.0 gpm @ 80 psi (7.6 L/min @ 552 kPa)
- Ledge or wall mount transfer valve. Maximum 1 3/4" deck thickness.
- 69" flexible hose.
- Handshower flows 2.0 gpm @ 80 psi.
- Certified dual check valves.


WARRANTY

- Lifetime Faucet and Finish Limited Warranty to the original consumer purchaser to be free from defects in material and workmanship.
- 5 Year Limited Warranty for usage in all industrial, commercial and business applications.



COMPLETE VALVE COMPLIES WITH:

- ASME A112.18.1 / CSA B125.1 ◆
- ASME A112.18.3
- Indicates compliance to CABO/ANSI A117.1 (Lever & cross handles only)
- ASSE 1014
- GSA A-A-237
- GSA WW-P-541/7C

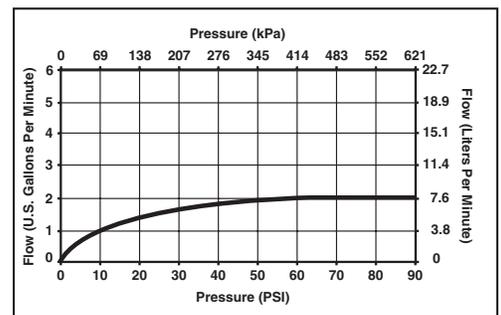

Delta reserves the right (1) to make changes in specifications and materials, and (2) to change or discontinue models, both without notice or obligation. Dimensions are for reference only. See current full-line price book or www.brizo.com for finish options and product availability.

BSP-S-6010-LHP Rev. B

Delta Faucet Company
 Indianapolis, Indiana 46280
 A Division of Masco Corporation of Indiana
 © 2012 Masco Corporation of Indiana