


Submitted Model No.: _ **Specific Features:**

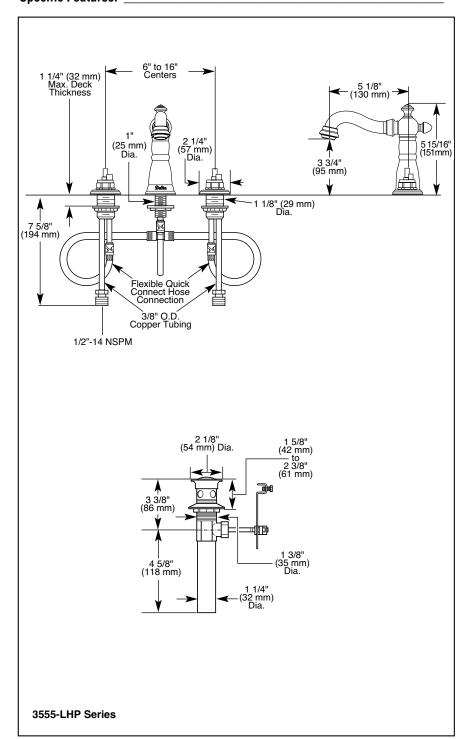

⚠ DELTA.

LAVATORY **FAUCETS**

- Two Handle
- Victorian[™] Series
- Widespread
- Three Hole Sink Applications
- 6" to 16" Centers
- Quick Snap® Installation







COMPLIES WITH:


- NSF 61
- ASME A112.18.1-2000
- CSA B125-98

Indicates ADA compliance to Indicates ADA COMPILE ICC/ANSI A117.1-1998

- IAPMO Listed
- CSA Certified
- UL Classifed

STANDARD SPECIFICATIONS:

- Two handle lavatory faucets for concealed mounting on three hole sinks.
- Widespread 6" (152mm) to 16" (406 mm) centers.
- Solid brass fabricated end valve and spout bodies.
- 5 1/8" (130 mm) long, 5 15/16" (151 mm) high, rigid spout.
- Hot and cold stems are interchangeable.
- 1/4 Turn stops
- Control mechanism shall be of the rotating cylinder type with stainless steel plate and 180° rotation, with replaceable non-metallic seats operating in stainless steel lined sockets.
- 3/8" O.D. copper supply tubes.
- Models with "LHP" supplied with 1/2"-14 NPSM adapters.
- Models have metal drain with pop-up type fitting with plated flange and stopper.
- Quick Snap® Installation



Standard Features	3555-LHP	3555-CBLHP	3555-PBLHP	3555-NNLHP	3555-NPLHP	3555-RBLHP
Washerless	*	•	♦	♦	•	♦
Three Hole Installation	♦	♦	♦	•	♦	•
6" (152 mm) to 16" (406 mm) Widespread	*	♦	♦	•	♦	•
5 1/8" (130 mm) Long, 5 15/16" (151 mm) High, Rigid Spout	*	♦	♦	•	•	•
Less Handle Program See Handle Kit Options*	•	•	•	•	•	•
Brass Stems and 1/4 Turn Handle Stops	*	•	♦	•	•	•
3/8" O.D. Copper Supply Tubes	*	•	•	•	•	•
1/2"-14 NPSM Adapters	*	♦	•	•	•	•
Quick Snap® Installation	*	•	•	•	•	•
Metal Pop-Up Drain	♦	♦	♦	•	•	•
Chrome Finish	♦					
Chrome and Brilliance® Polished Brass Finish		♦				
Brilliance® Polished Brass Finish			♦			
Brilliance® Pearl Nickel Finish				•		
Brilliance® Pearl Nickel and Brilliance® Polished Brass Finish					•	
Venetian Bronze™ Finish						•

*Available LHP Handle Options ▲Specify Finish

